


1. CONTACTS ACCEPT 24-20 AWG RANGE.
2. INSERTS: NYLON, GLASS FILLED, UL 94V-0 RATED, BLACK.
3. GROMMETTS: PVC, UL 94V-0 RATED, BLACK.
4. CONTACTS: BRASS.
5. SHELLS: CARBON STEEL.
6. CABLE CLAMPS: ZINC; SCREWS & NUTS: CARBON STEEL.
7. CONTACTS: GOLD FLASH FOR A LENGTH OF 3.81[.150] MIN FROM MATING END, 2.54µm[.000100] MIN TIN ON OPPOSITE END FOR A LENGTH OF 4.06 [.160] MIN FROM END OF INSULATION BARREL, BOTH OVER 0.76µm[.000030] MIN NICKEL ON ENTIRE CONTACT.
8. SHELLS: 5.08µm[.000200] MIN TIN OVER 2.54µm[.000100] MIN COPPER.
9. MOUNTING SCREWS & NUTS: 3.81µm[.000150] MIN ZINC, CLEAR CHROMATE COATED; FILISTER HEAD SCREWS: ZINC, CLEAR CHROMATE COATED.
10. CABLE CLAMP: NICKEL OVER COPPER.

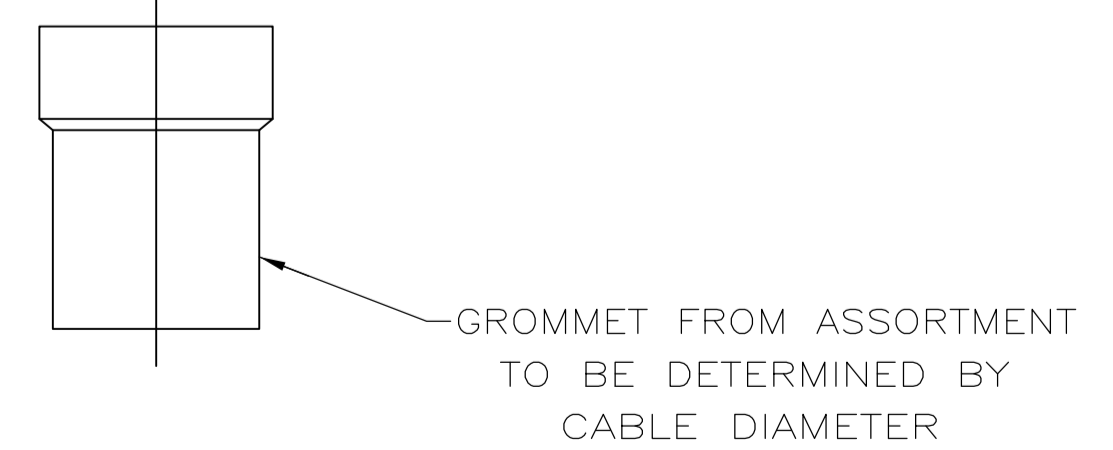

749805-7
PART NO

| | | | | | |
|--|--------------|------------------------|------------|--------|------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DIN | J. REITZEL | 1AUG03 | TE Connectivity |
| DIMENSIONS: mm [INCHES] | | CHK | S. BOLASH | 1AUG03 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APP'D | M. WAMSLEY | 1AUG03 | NAME |
| 0. PLC | ± - | PRODUCT SPEC | | | PLUG KIT, UNASSEMBLED, |
| 1. PLC | ± - | APPLICATION SPEC | | | SIZE 1, 9 POSN, METAL SHELL, |
| 2. PLC | ± 0.13[.005] | SIZE | | | AMPLIMITE™ HDP-20 |
| 3. PLC | ± - | CAGE CODE DRAWING NO | | | RESTRICTED TO |
| 4. PLC | ± - | 114-40030 | | | SIZE |
| ANGLES | ± - | WEIGHT | | | A1 00779 |
| MATERIAL | FINISH | C=749805-7 | | | SCALE 2:1 |
| CUSTOMER DRAWING | | SHEET 1 OF 1 | | | REV B1 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)

[>>点击查看相关商品](#)