

REV. 3  
DCO 102710

COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 7600 OHMS ±10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 120.0 VDC  
 MUST OPERATE \_\_\_\_\_ 65.0 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 36.1 VDC MAX, 7.7 VDC MIN.


ENVIRONMENT:  
 VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 2000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 20 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 50 \_\_\_\_\_ g's \_\_\_\_\_ 11 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE & RELEASE 15 MS MAX.  
 \_\_\_\_\_ OPERATE BOUNCE 5 MS MAX.  
 \_\_\_\_\_ RELEASE BOUNCE 5 MS MAX.

CUST. \_\_\_\_\_ OPL  
 CUST. NO. \_\_\_\_\_ M5757/23-027 \_\_\_\_\_ REV. \_\_\_\_\_

"07" RELAY

CUSTOMER DATA SHEET

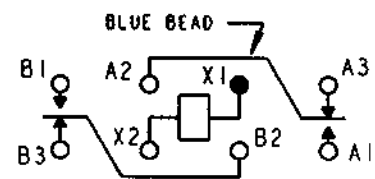

TERMINAL VIEW

CONTACT RATING: \_\_\_\_\_ 10 AMPS 28 VDC  
 \_\_\_\_\_ 5 AMPS 115 VAC/400 Hz RESISTIVE  
 \_\_\_\_\_ 50,000 OPERATIONS

DR. BSH 8/17/01 CK.TLG 8-17-01

**CII Technologies**  
 advanced control electronic solutions

B07D992BE2-0132

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)