


CUSTOMER DRAWING

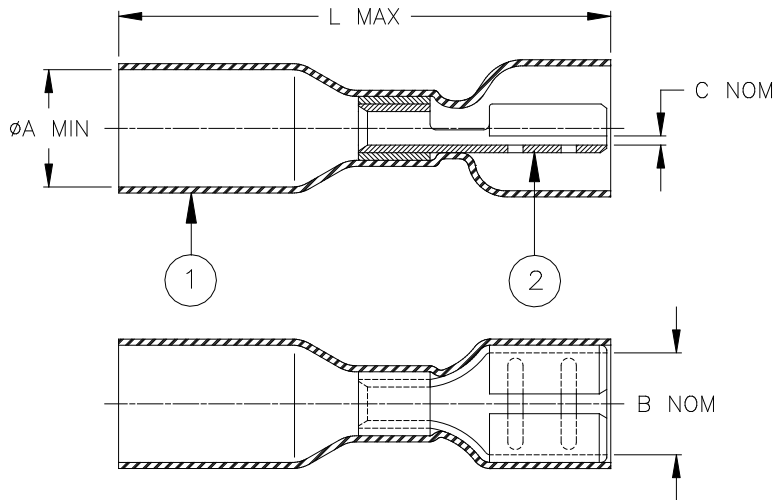

Product Name	Product Dimensions					Wire Dimensions			
	ØA min	B nom	C nom	L max	Color (1)	Size Range mm ² (AWG)	ØG		
							min	max	
B-106-3631	4.00 [0.160]	6.60 [0.260]	0.80 [0.030]	30.00 [1.180]	Red	0.5 - 1.0 (AWG 22-18)	1.4 [0.055]	4.0 [0.160]	
B-106-3632	4.60 [0.180]	6.60 [0.260]	0.80 [0.030]	32.00 [1.260]	Blue	1.5 - 2.5 (AWG 16-14)	2.0 [0.080]	4.6 [0.180]	
B-106-3633	6.50 [0.255]	6.60 [0.260]	0.80 [0.030]	33.00 [1.300]	Yellow	3.0 - 6.0 (AWG 12-10)	2.8 [0.110]	6.5 [0.255]	


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent color (1), radiation cross-linked modified polyamide with thermoplastic adhesive coating inside.
- PUSH-ON TERMINAL: Tin-plated brass.
 BASE METAL: C260 (C26000) or C268 Brass.
 PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

- These controlled crimp devices are designed to terminate a tin-plated or bare copper stranded wire having an insulation rated for at least 75°C to a push-on terminal. It will provide a splash proof and strain relief connection.
 UL listed wire connector 3Z11.
- Temperature range: -55°C to +125°C.
- For application tooling and installation, see RPIP-684-00.

For best results, prepare the wire as shown:

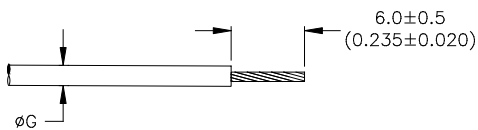

			TITLE: DURASEAL PUSH-ON RECEPTACLE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: B-106-3XXX		
TOLERANCES: 0.00 ± 0.02 MM 0.0 ± 0.2 MM 0 ± 0.5 MM	ANGLES: ± 0°30' ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REVISION: D	DATE: FEB 22, 2017
PREPARED BY: YNGUYEN	CAGE CODE: 06090	REVISED PER: ECO-17-002136	SCALE: NTS	SIZE: A	SHEET: 1 of 1

©2015-2017 TE CONNECTIVITY CORPORATION. ALL RIGHTS RESERVED.

If this document is printed it becomes uncontrolled. Check for the latest revision

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)