

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		PANEL MOUNTING HOLES CHANGED	23JUN16	FP NG

NOTES  
 PHYSICAL PROPERTIES:  
 HOUSING MATERIAL: PBT  
 FLAMMABILITY: UL94V-0  
 COLOR: BLACK  
 MAX BOW/WARP: .0056 IN/IN.



TERMINAL:  
 TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)  
 SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)  
 Q.C. TABS: BRASS, NICKEL PLATED.

MECHANICAL:  
 PITCH (TERMINAL SPACING): .563"  
 WIRE RANGE: 10-22 AWG  
 RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:  
 MAXIMUM CURRENT: 30A  
 OPERATING VOLTAGE: 600V

ENVIRONMENTAL PROPERTIES:  
 OPERATING TEMP RANGE: -40° TO +120°C

- 1 NICKEL PLATED BRASS SCREWS.
- 2 PRELIMINARY PART NUMBER.

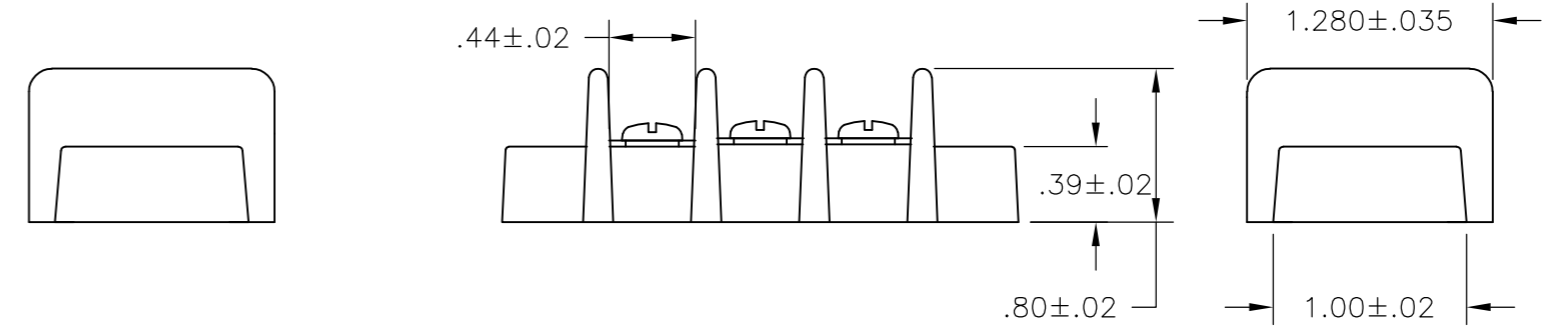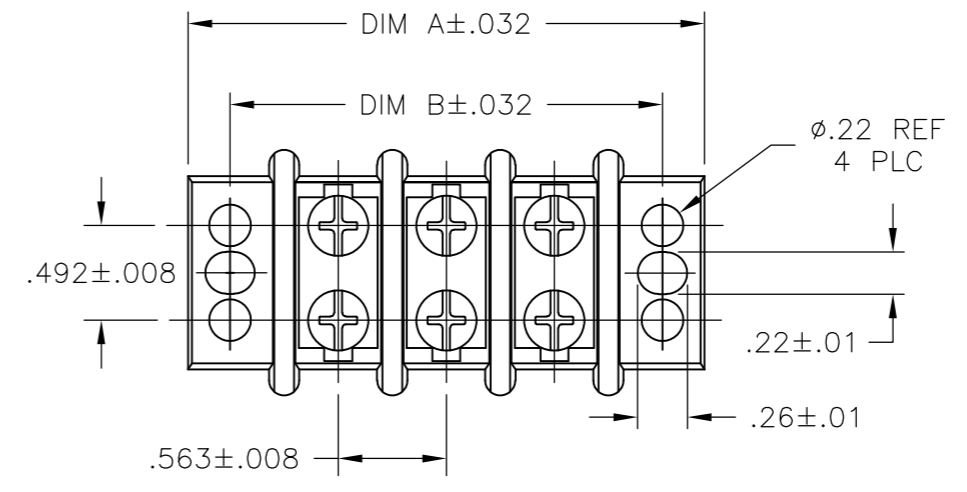

-	-	-	-	-	-	-	-	-	10.701	11.138	18	1-1776544-8
-	-	-	-	-	-	-	-	-	10.138	10.575	17	1-1776544-7
-	-	-	-	-	-	-	-	-	9.575	10.012	16	1-1776544-6
-	-	-	-	-	-	-	-	-	9.012	9.449	15	1-1776544-5
2	-	-	-	-	-	-	-	-	8.449	8.886	14	2-1776544-4
-	-	-	-	-	-	-	-	-	8.449	8.886	14	1-1776544-4
-	-	-	-	-	-	-	-	-	7.886	8.323	13	1-1776544-3
-	-	-	-	-	-	-	-	-	7.323	7.760	12	1-1776544-2
2	-	-	-	-	-	-	-	-	6.760	7.179	11	2-1776544-3
-	-	-	-	-	-	-	-	-	6.760	7.179	11	1-1776544-1
2	-	-	-	-	-	-	-	-	6.197	6.634	10	2-1776544-2
-	-	-	-	-	-	-	-	-	6.197	6.634	10	1-1776544-0
-	-	-	-	-	-	-	-	-	5.634	6.071	9	1776544-9
2	-	-	-	-	-	-	-	-	5.071	5.508	8	2-1776544-5
-	-	-	-	-	-	-	-	-	5.071	5.508	8	1776544-8
-	-	-	-	-	-	-	-	-	4.508	4.945	7	1776544-7
2	-	-	-	-	-	-	-	-	3.945	4.382	6	2-1776544-1
-	-	-	-	-	-	-	-	-	3.945	4.382	6	1776544-6
-	-	-	-	-	-	-	-	-	3.382	3.819	5	1776544-5
2	-	-	-	-	-	-	-	-	2.819	3.256	4	2-1776544-0
-	-	-	-	-	-	-	-	-	2.819	3.256	4	1776544-4
2	-	-	-	-	-	-	-	-	2.256	2.693	3	1-1776544-9
-	-	-	-	-	-	-	-	-	2.256	2.693	3	1776544-3
-	-	-	-	-	-	-	-	-	1.693	2.130	2	1776544-2
NOTES	8 .250 QC TAB 90° DOUBLE SIDE	7 .250 QC TAB 90°/45° DOUBLE SIDE	6 .250 QC TAB 90° DOUBLE SIDE	5 .250 QC TAB 45° DOUBLE SIDE	4 .250 QC TAB STRAIGHT DOUBLE SIDE	3 .250 QC TAB 90° SINGLE SIDE	2 .250 QC TAB 45° SINGLE SIDE	1 .250 QC TAB STRAIGHT SINGLE SIDE	DIM B	DIM A	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	S SCHLEGEL	2/21/07
CHK	S YODER	2/21/07
APVD	S YODER	2/21/07

TE Connectivity

NAME: 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER, 600v

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=1776544	RESTRICTED TO	-
WEIGHT	0.000000	SCALE	NTS	SHEET	1 of 1	REV	B

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)