



LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14			E		REVISED & REDRAWN PER 0720-0303-93	8-30-93	BB

REVISIONS

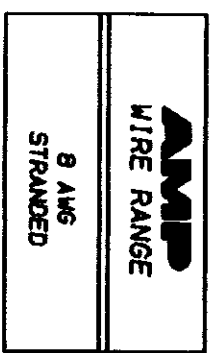

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

NOTE:
 1. WIRE INSULATION DIA 8.51 [0.335] MAX

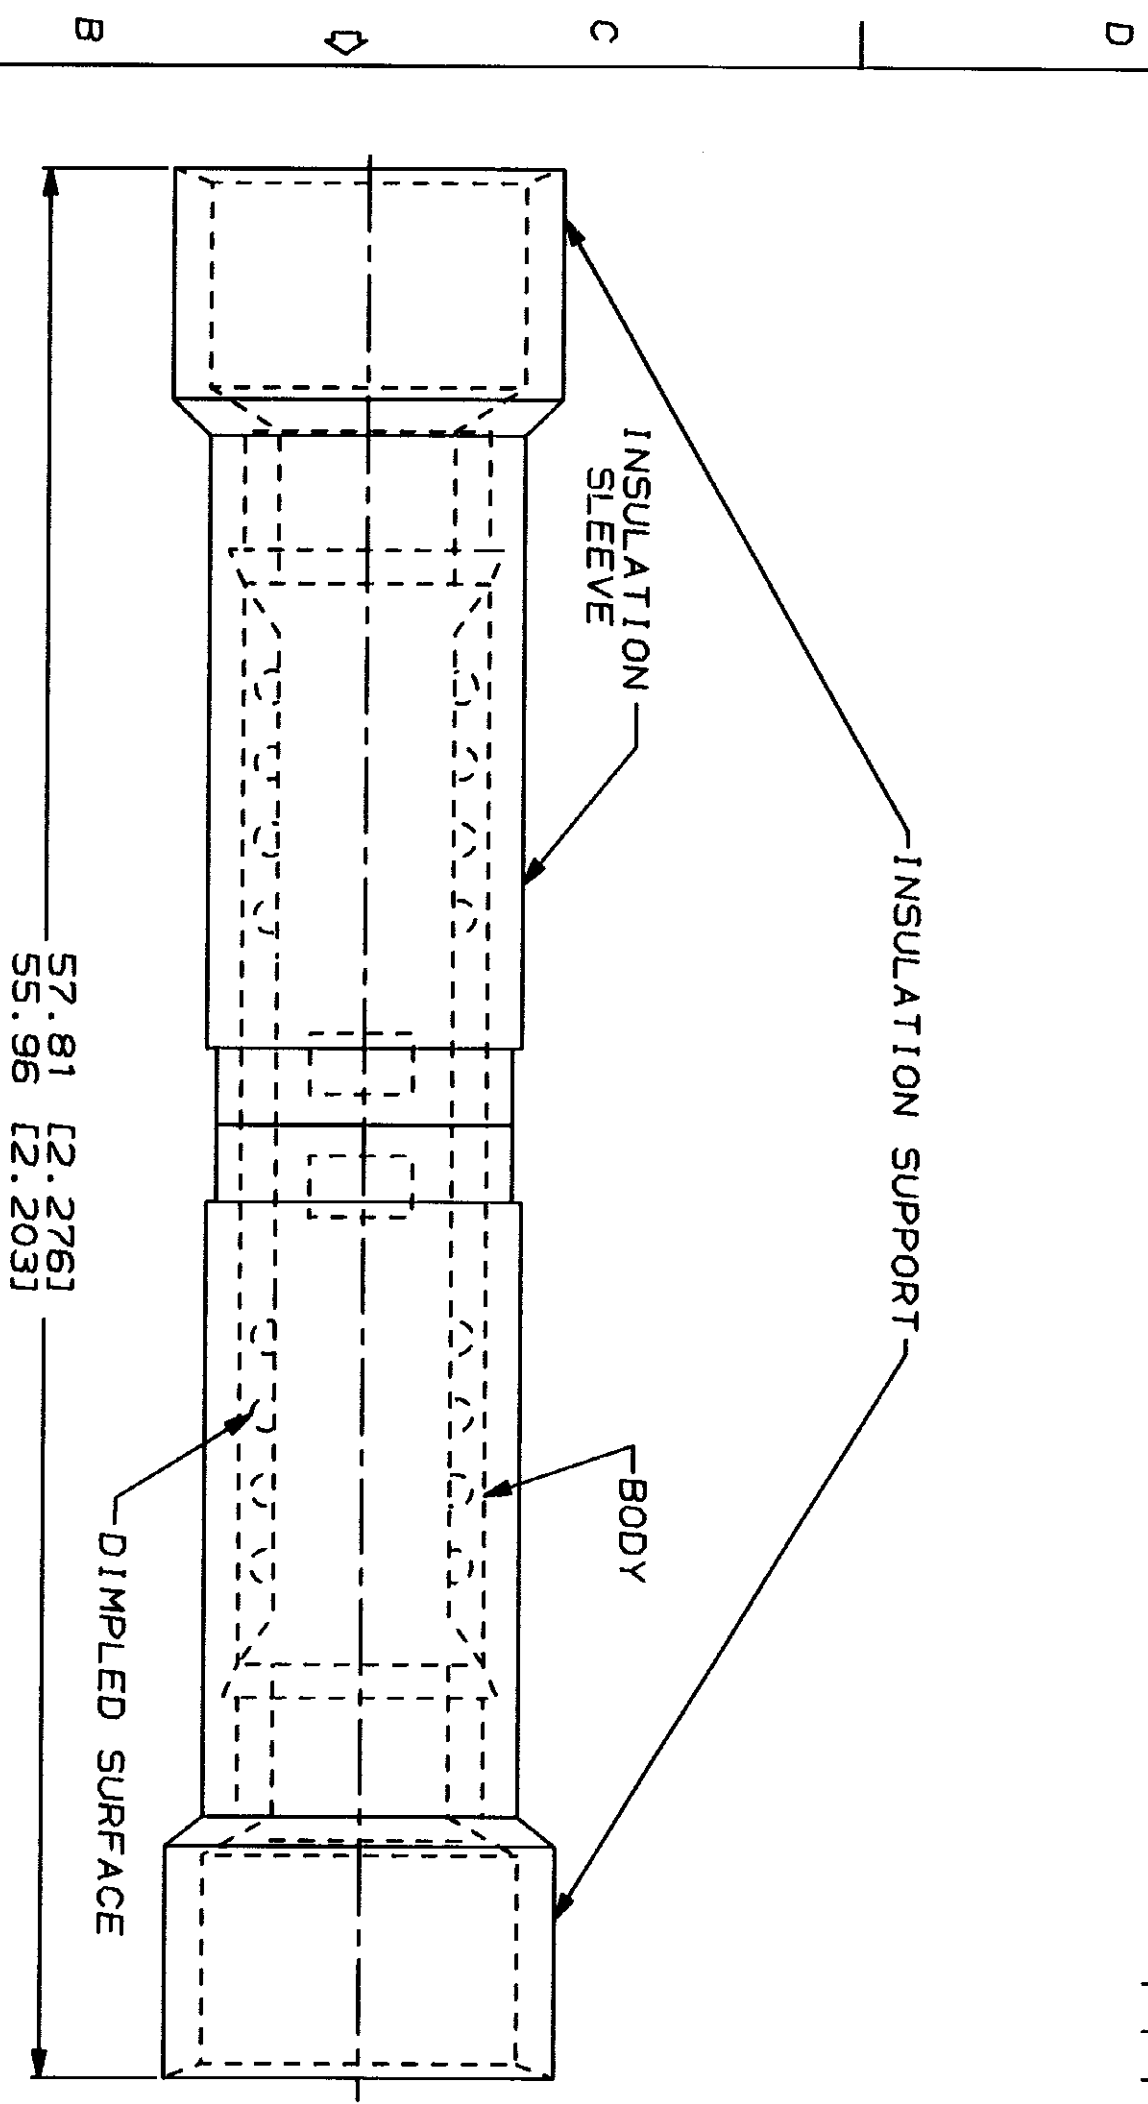

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER	1-800-522-6752
FOR APPLICATION	TOOLING ASSISTANCE CENTER	1-800-722-1111
FOR ORDER ENTRY		1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:	105°C
VOLTAGE RATING:	600 V MAX
CIRCULAR MIL AREA:	6.84-10.54mm² [13,100-20,800] STRANDED
DO NOT SCALE PRINT. UNLESS SPECIFIED OTHERWISE TOLERANCES ON: 2 P.C DEC # 0.20(.008) 3 P.C DEC # .1 ANGLES	
MATERIAL	COPPER PER ASTM B-152 NYLON, COLOR RED
FINISH	TIN PLATE PER MIL-T-10727
DR 8-30-93	S.S. GOLDEN
CHK 8-30-93	R. HENNEY
APPD 8-30-93	B. BLIS
APPD 8-30-93	N. BLIS
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	
QTY	100
PACKAGE TYPE	LOOSE PC
PART NO	324657
NAME	AMP Incorporated Harrisburg, PA 17105-3608
SIZE	B
CAGE CODE	00779
DRAWING NO	324657
SCALE	NTS
SHEET	1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)