


1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.40dB PLUS CABLE ATTENUATION OF 0.70dB/km AT 1300nm. (SEE TABLE)
2. MINIMUM RETURN LOSS: 55dB
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

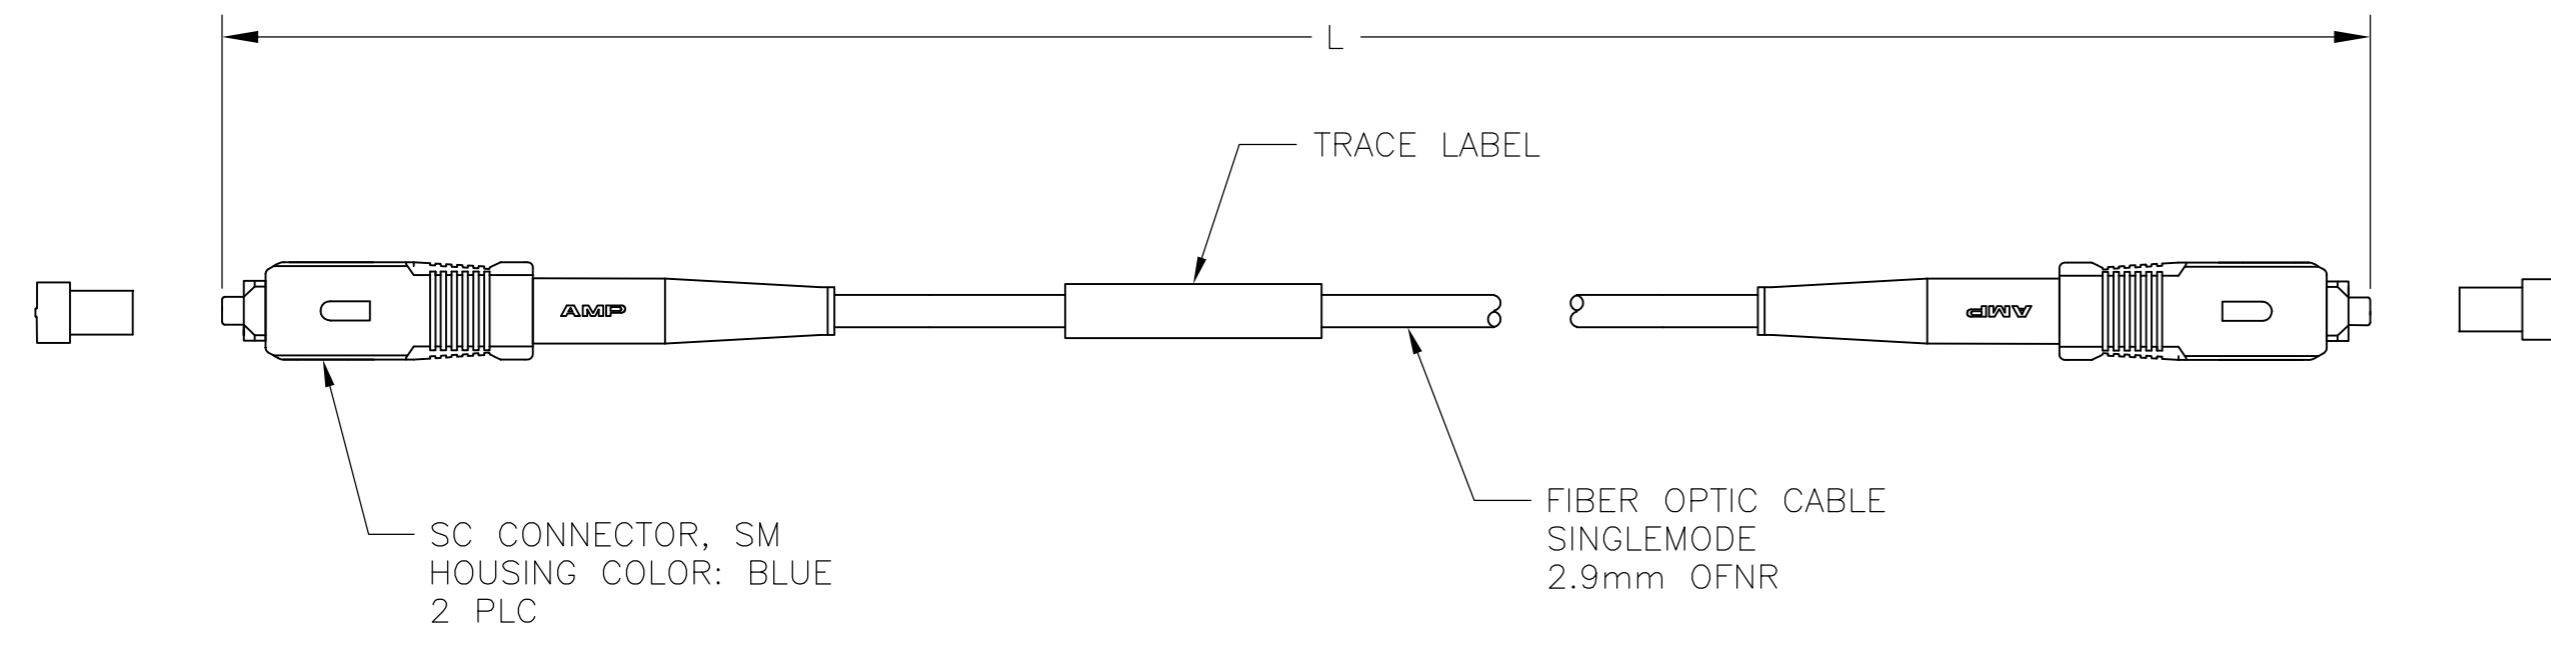

| MAX IL (dB) | L METERS [INCHES] | PART NUMBER |
|-------------|-------------------------------|-------------|
| 1.10 | 1000.00±20.00 [39370.1±787.4] | 9-5492015-9 |
| 0.44 | 50.00±0.50 [1968.5±19.7] | 5-5492015-0 |
| 0.41 | 12.19±0.15 [480.0±5.9] | 3-5492015-2 |
| 0.40 | 1.37±0.05 [53.9±2.0] | 3-5492015-1 |
| 0.40 | 0.46±0.03 [18.1±1.0] | 3-5492015-0 |
| 0.47 | 100.00±1.00 [3937.0±39.4] | 2-5492015-9 |
| 0.44 | 60.00±0.60 [2362.2±23.6] | 2-5492015-5 |
| 0.43 | 40.00±0.40 [1574.8±15.8] | 2-5492015-2 |
| 0.42 | 30.00±0.30 [1181.1±11.8] | 2-5492015-1 |
| 0.42 | 35.00±0.35 [1378.0±13.8] | 2-5492015-0 |
| 0.40 | 4.00±0.08 [157.5±3.2] | 1-5492015-9 |
| 0.41 | 25.00±0.30 [984.0±11.8] | 1-5492015-6 |
| 0.41 | 9.00±0.15 [354.3±5.9] | 1-5492015-4 |
| 0.41 | 8.00±0.15 [315.0±5.9] | 1-5492015-3 |
| 0.40 | 6.00±0.08 [236.2±3.0] | 1-5492015-2 |
| 0.40 | 1.50±0.05 [59.1±2.0] | 1-5492015-1 |
| 0.40 | 0.75±0.03 [29.6±1.0] | 1-5492015-0 |
| 0.40 | 0.30+0.05/-0.0 [11.8+2.0/-0] | 5492015-9 |
| 0.40 | 7.00±0.08 [275.6±3.2] | 5492015-8 |
| 0.41 | 20.00±0.30 [787.4±11.8] | 5492015-7 |
| 0.41 | 15.00±0.15 [591.6±5.9] | 5492015-6 |
| 0.41 | 10.00±0.15 [393.7±5.9] | 5492015-5 |
| 0.40 | 5.00±0.08 [196.8±3.2] | 5492015-4 |
| 0.40 | 3.00±0.05 [118.1±2.0] | 5492015-3 |
| 0.40 | 2.00±0.05 [78.7±2.0] | 5492015-2 |
| 0.40 | 1.00±0.05 [39.4±2.0] | 5492015-1 |

| | | | | |
|---|-------------|--------------------------------|--|-----------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN J. W. DAVIS 21OCT05 | TE Connectivity | |
| DIMENSIONS: mm [INCHES] | | CHK J. DUNCAN 21OCT05 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD F. McCORKEL 21OCT05 | NAME CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE 2.9mm OFNR CABLE, SC TO SC, RoHS | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH - | | PRODUCT SPEC - | APPLICATION SPEC - | |
| MATERIAL - | WEIGHT - | SIZE A2 | CAGE CODE 00779 | DRAWING NO 5492015 |
| CUSTOMER DRAWING | | | RESTRICTED TO - | SCALE NTS |
| | | | SHEET 1 OF 1 | REV A3 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)