
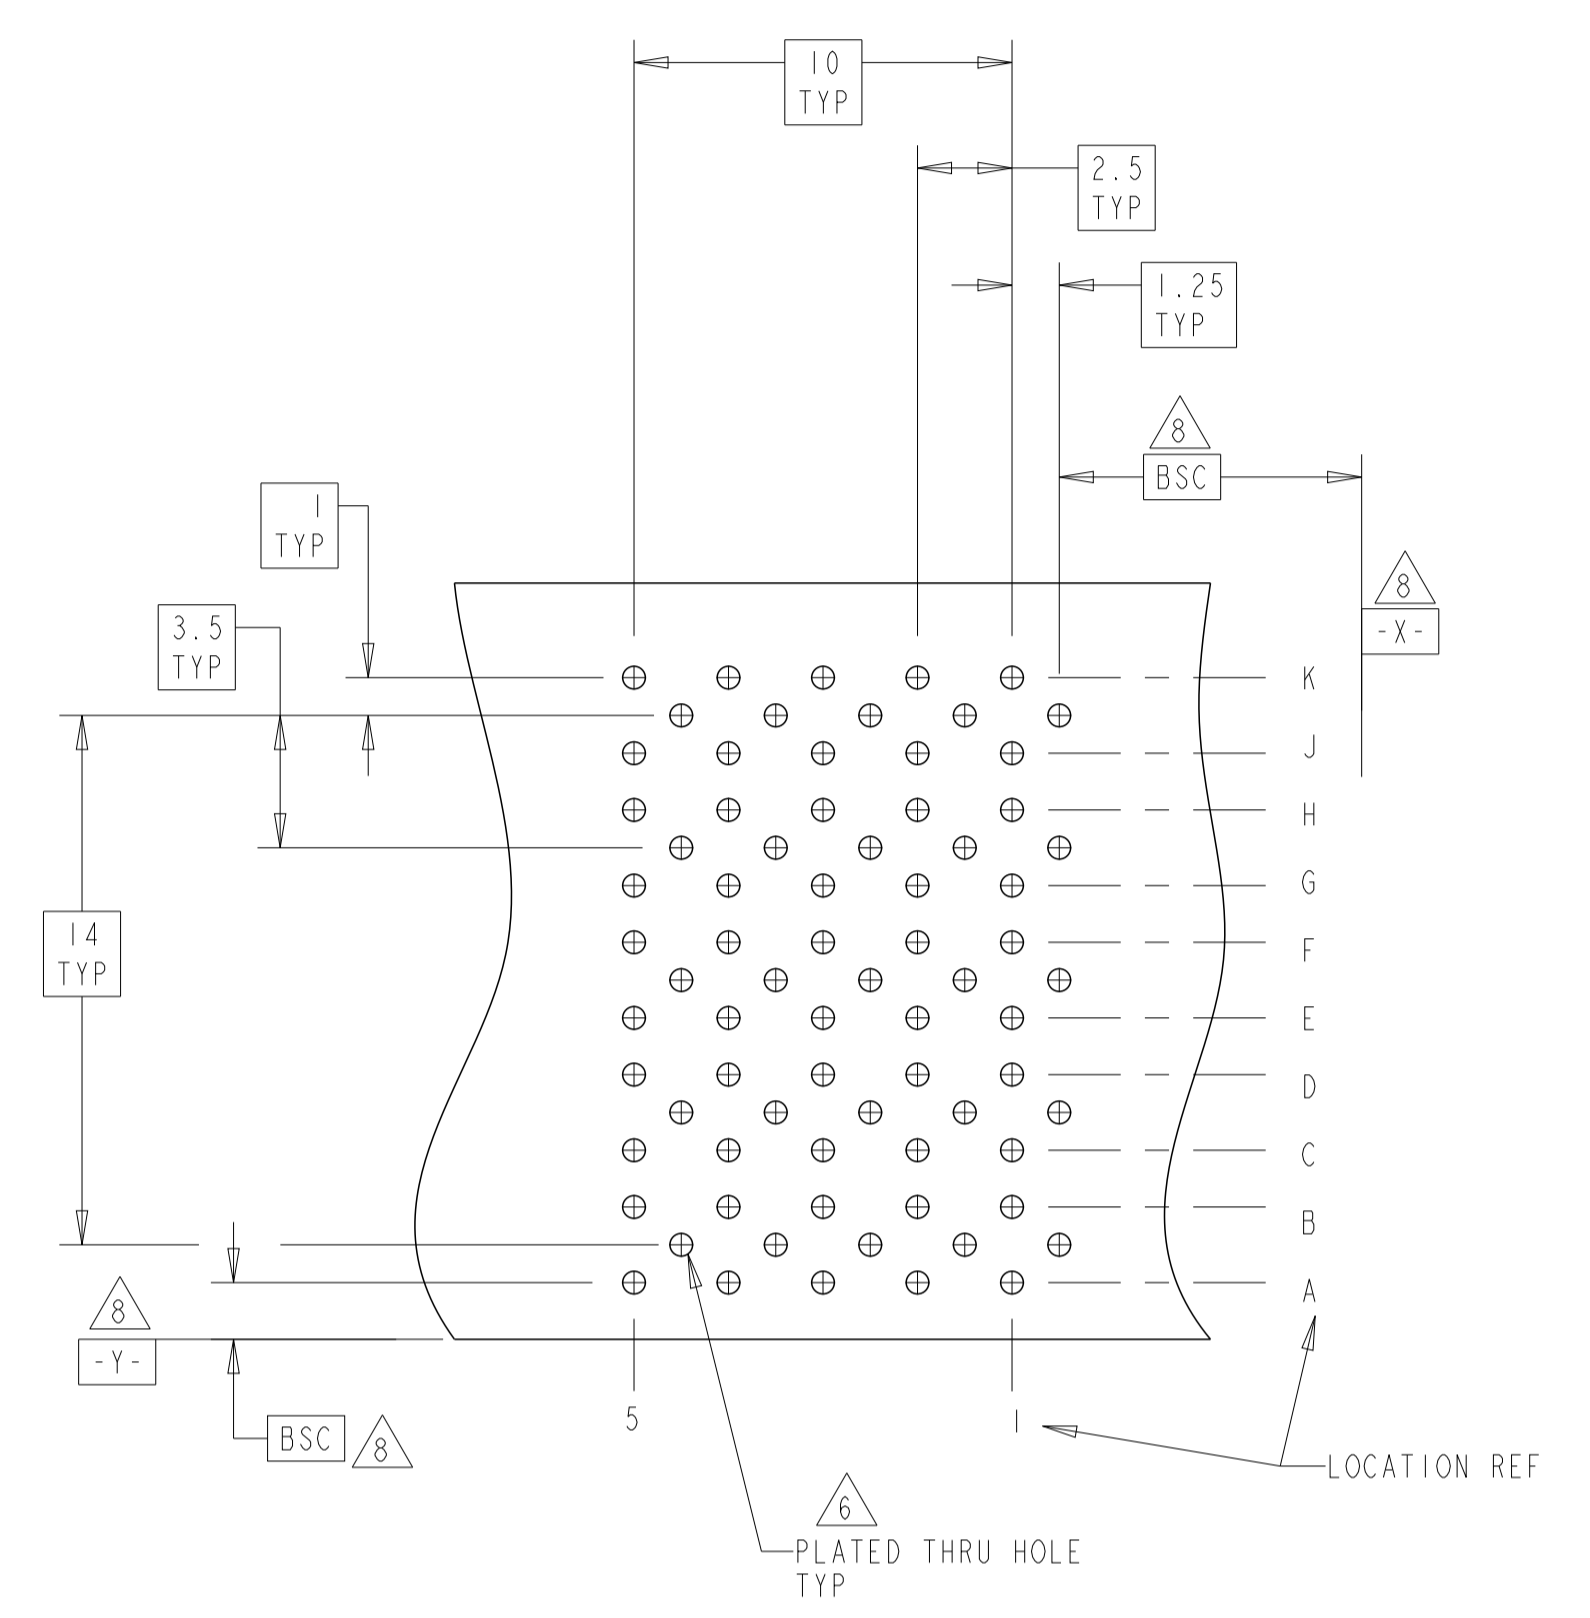
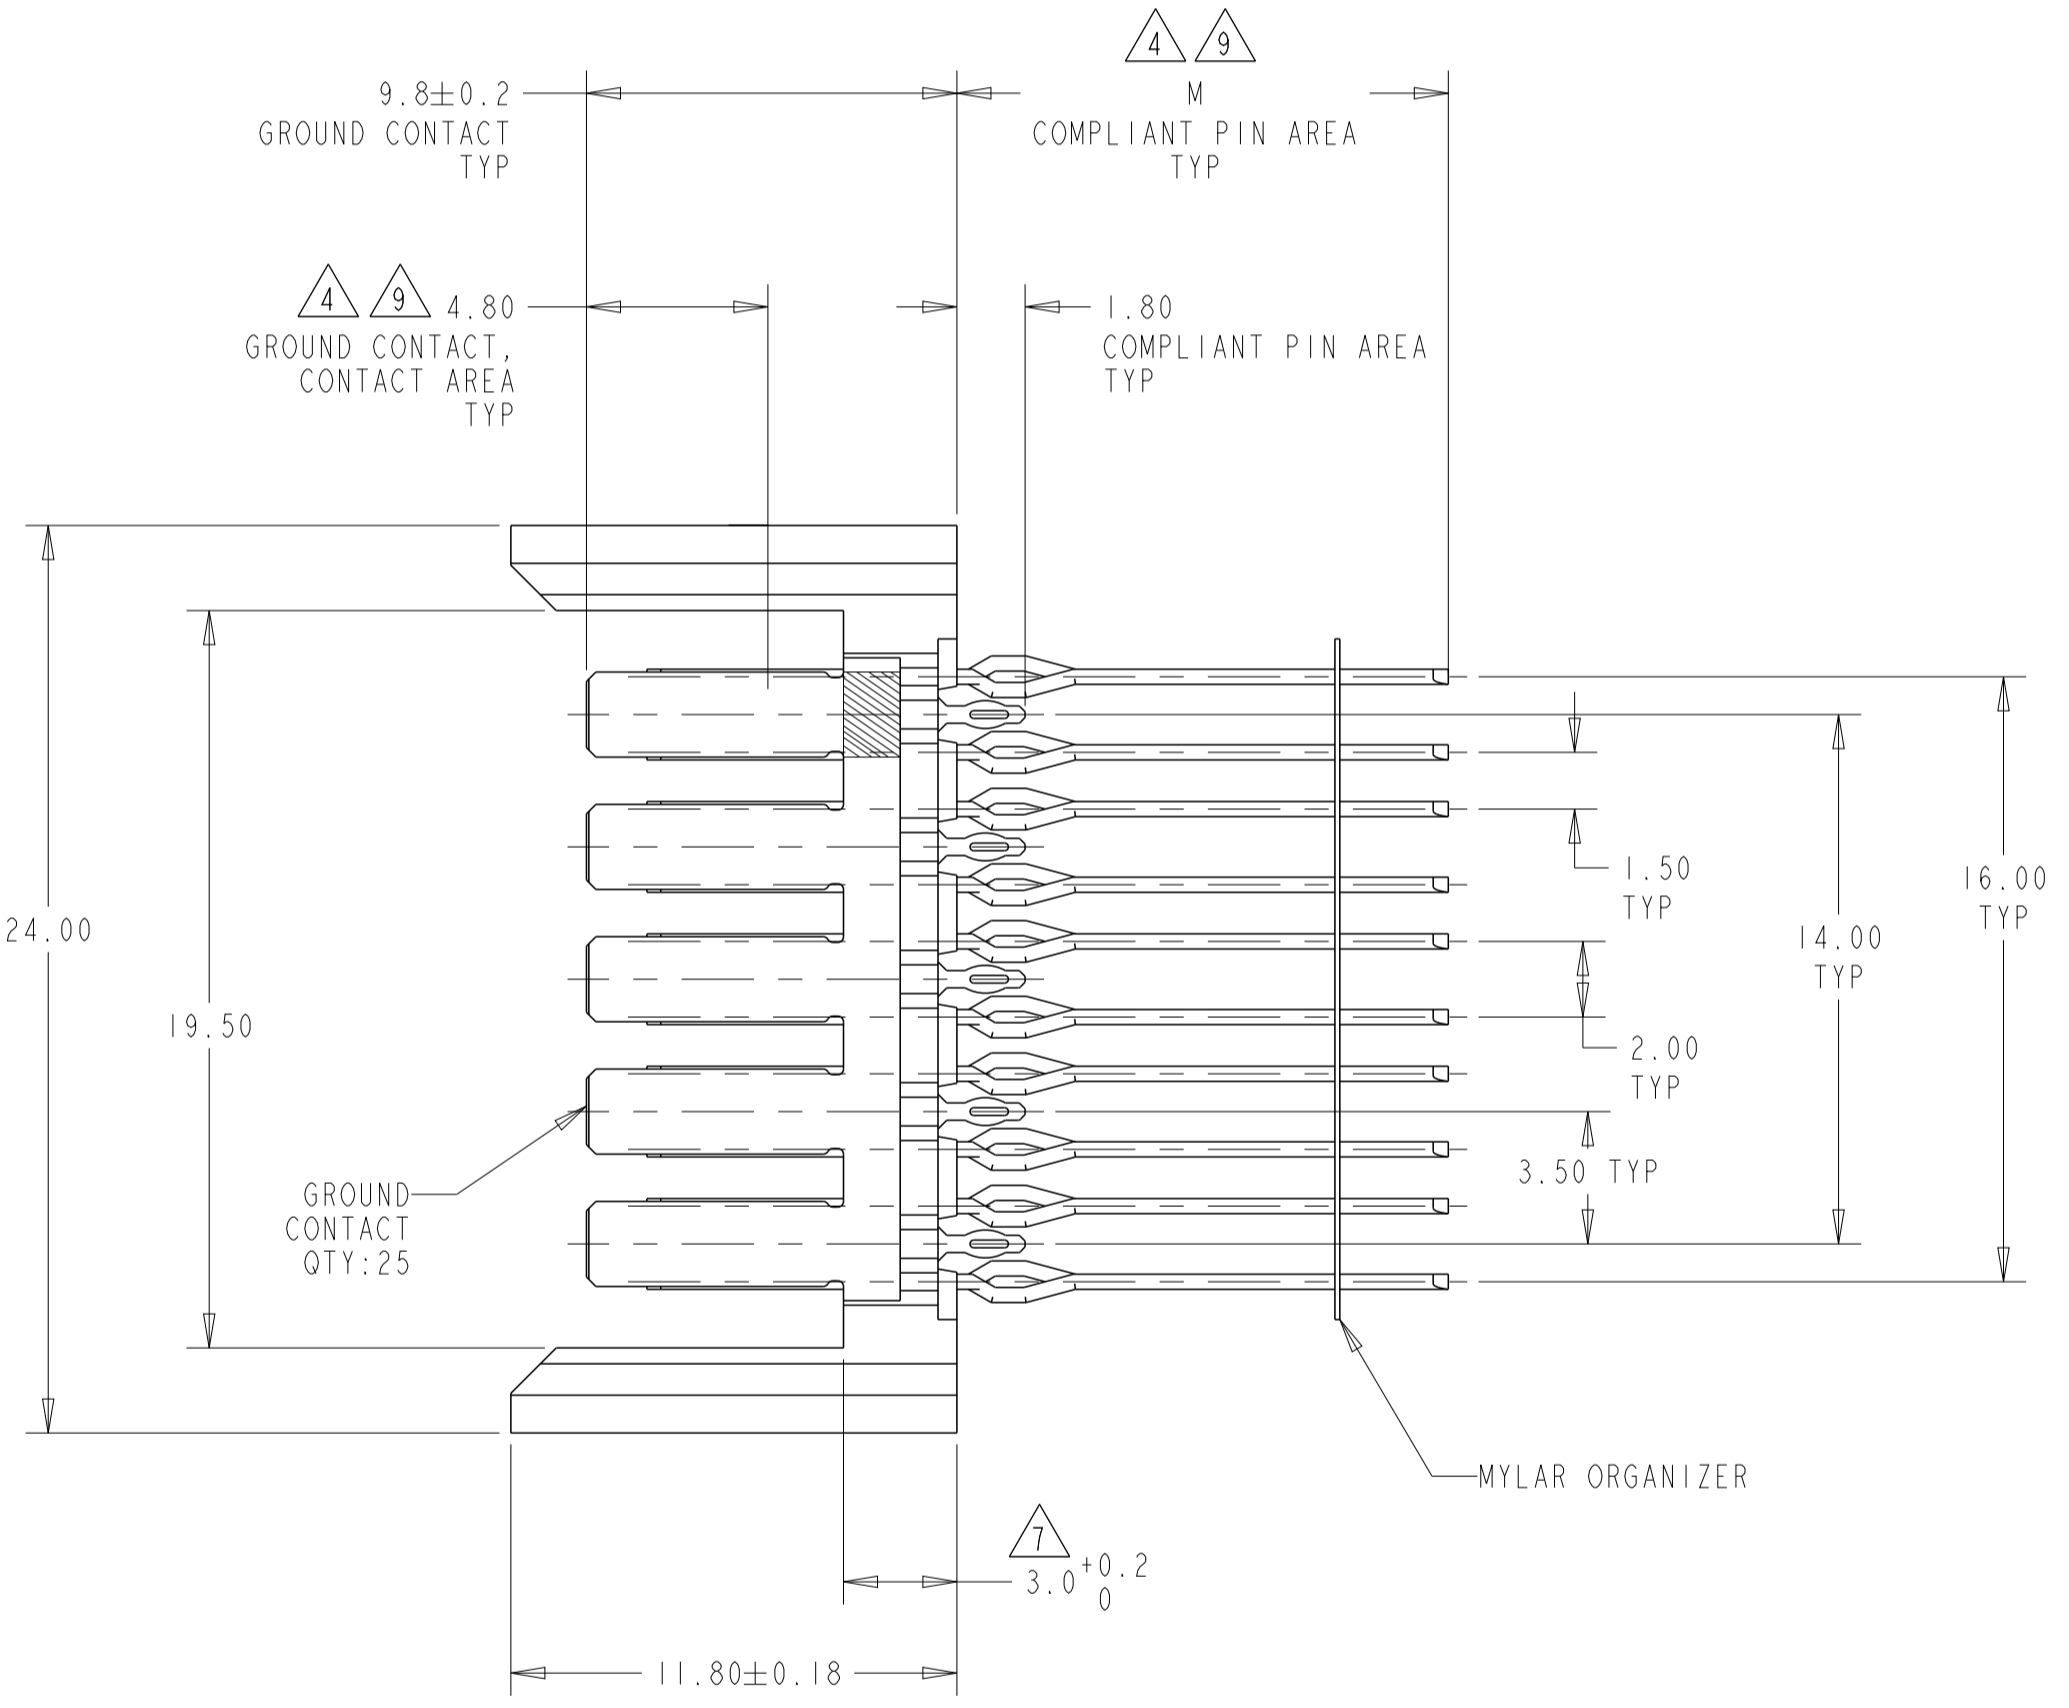
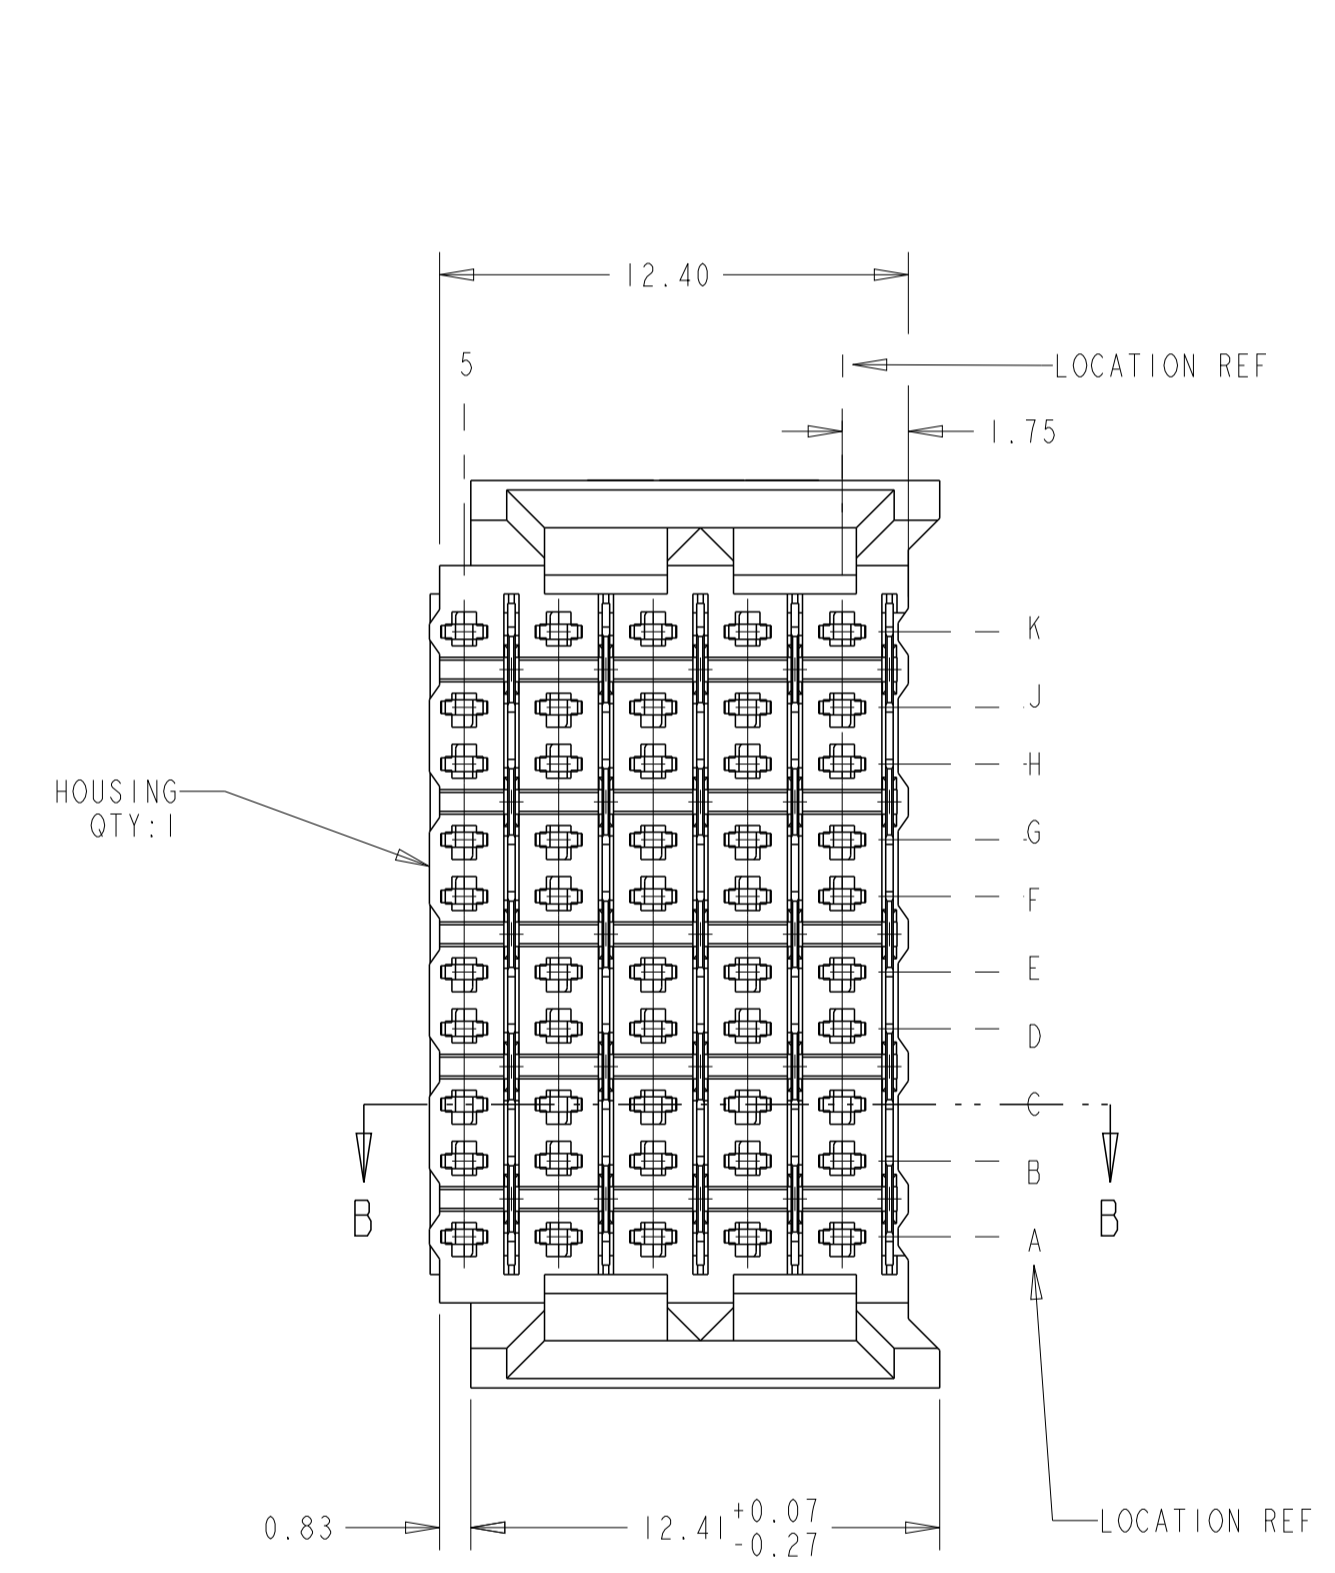


LOC	DIST	REV	DATE	BY	APPV
GP	00	B1	22SEP12	KH	JE
		REVISIONS			
		DESCRIPTION	DATE	DWN	APPV
		REVISED PER ECO-12-016679	22SEP12	KH	JE

- 2 PHOSPHOR BRONZE
- 3 GLASS FILLED POLYESTER
- 4 FINISH:  
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF  
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON  
TELCORDIA GR-1217-CORE; APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.  
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR  
RECOMMENDED PLATED THRU HOLE DIAMETER AND  
PLATING THICKNESS.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT  
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

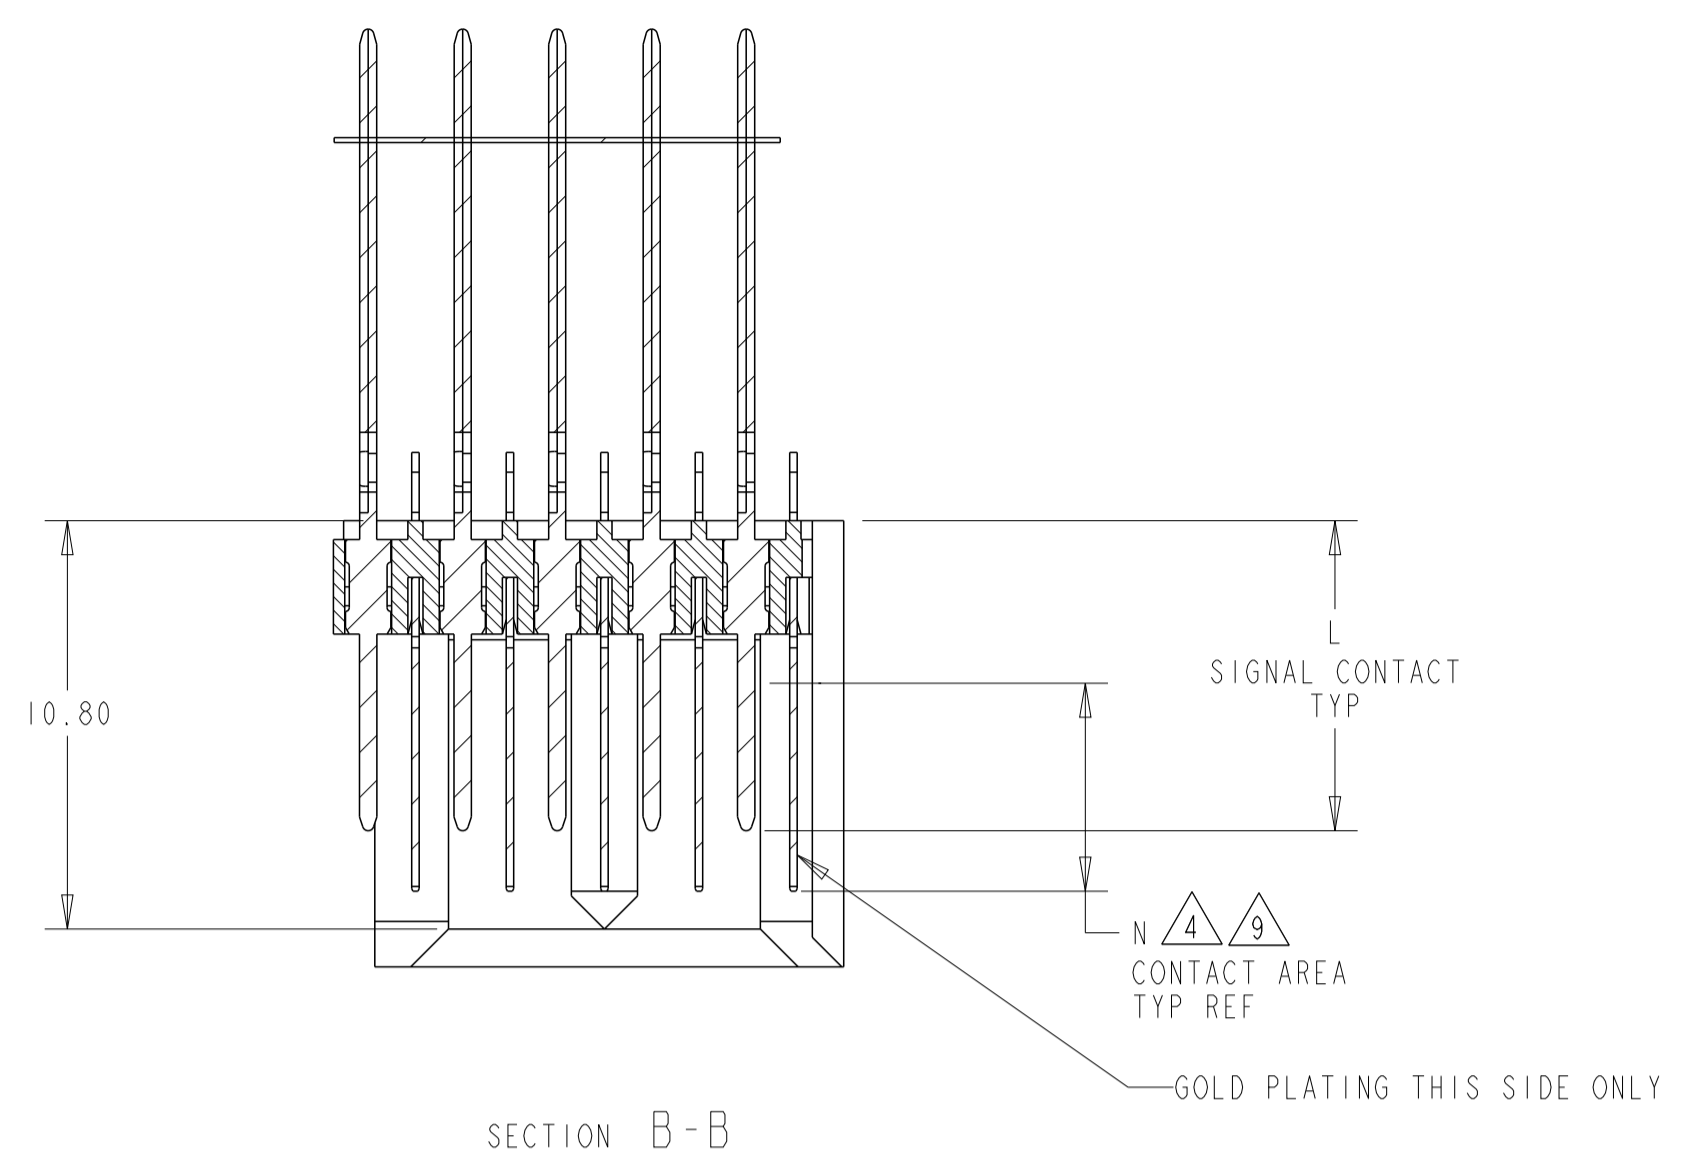

RECOMMENDED  
PRINTED CIRCUIT BOARD  
LAYOUT  
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.50	16	8.2	5120899-2
5.50	13.00	8.2	5120899-1
N	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: B. CARBO 09DEC04  
 CHK: R. PATTERSON 09DEC04  
 APV: R. PATTERSON 09DEC04

TE Connectivity

NAME: HEADER ASSEMBLY, 50 POSITION, 10 ROW, FEED THROUGH, BACKPLANE CONNECTOR, WITH ORGANIZER, Z-PACK HS3

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 5120899

SCALE: 5:1 SHEET 1 OF 1 REV: B1

MATERIAL: HOUSING: 3 CONTACTS: 2 SIGNAL CONTACT: 4

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±  
 1 PLC ±.13  
 2 PLC ±.13  
 3 PLC ±0.05  
 4 PLC ±  
 ANGLES ±  
 FINISH ±

RESTRICTED TO: CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)