


LOC		DIST		REVISIONS			
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
FT	22		E	REDRAWN PER 0010-0067-94	2/18/94	HR	
			F	REV PER EC 0320-349-97	27 OCT 97	NS	

1. RETAINING SPRINGS TO BE USED ON OPPOSITE SIDE OF CARD SLOT FOR SINGLE SIDED PC BOARD APPLICATIONS. USE 1 RETAINING SPRING PER 6 CRIMP STYLE CONTACTS, FOR EXAMPLE: 36 POSN-6 SPRINGS; 30 POSN-5 SPRINGS; 24 POSN-4 SPRINGS; 18 POSN-3 SPRINGS ETC...

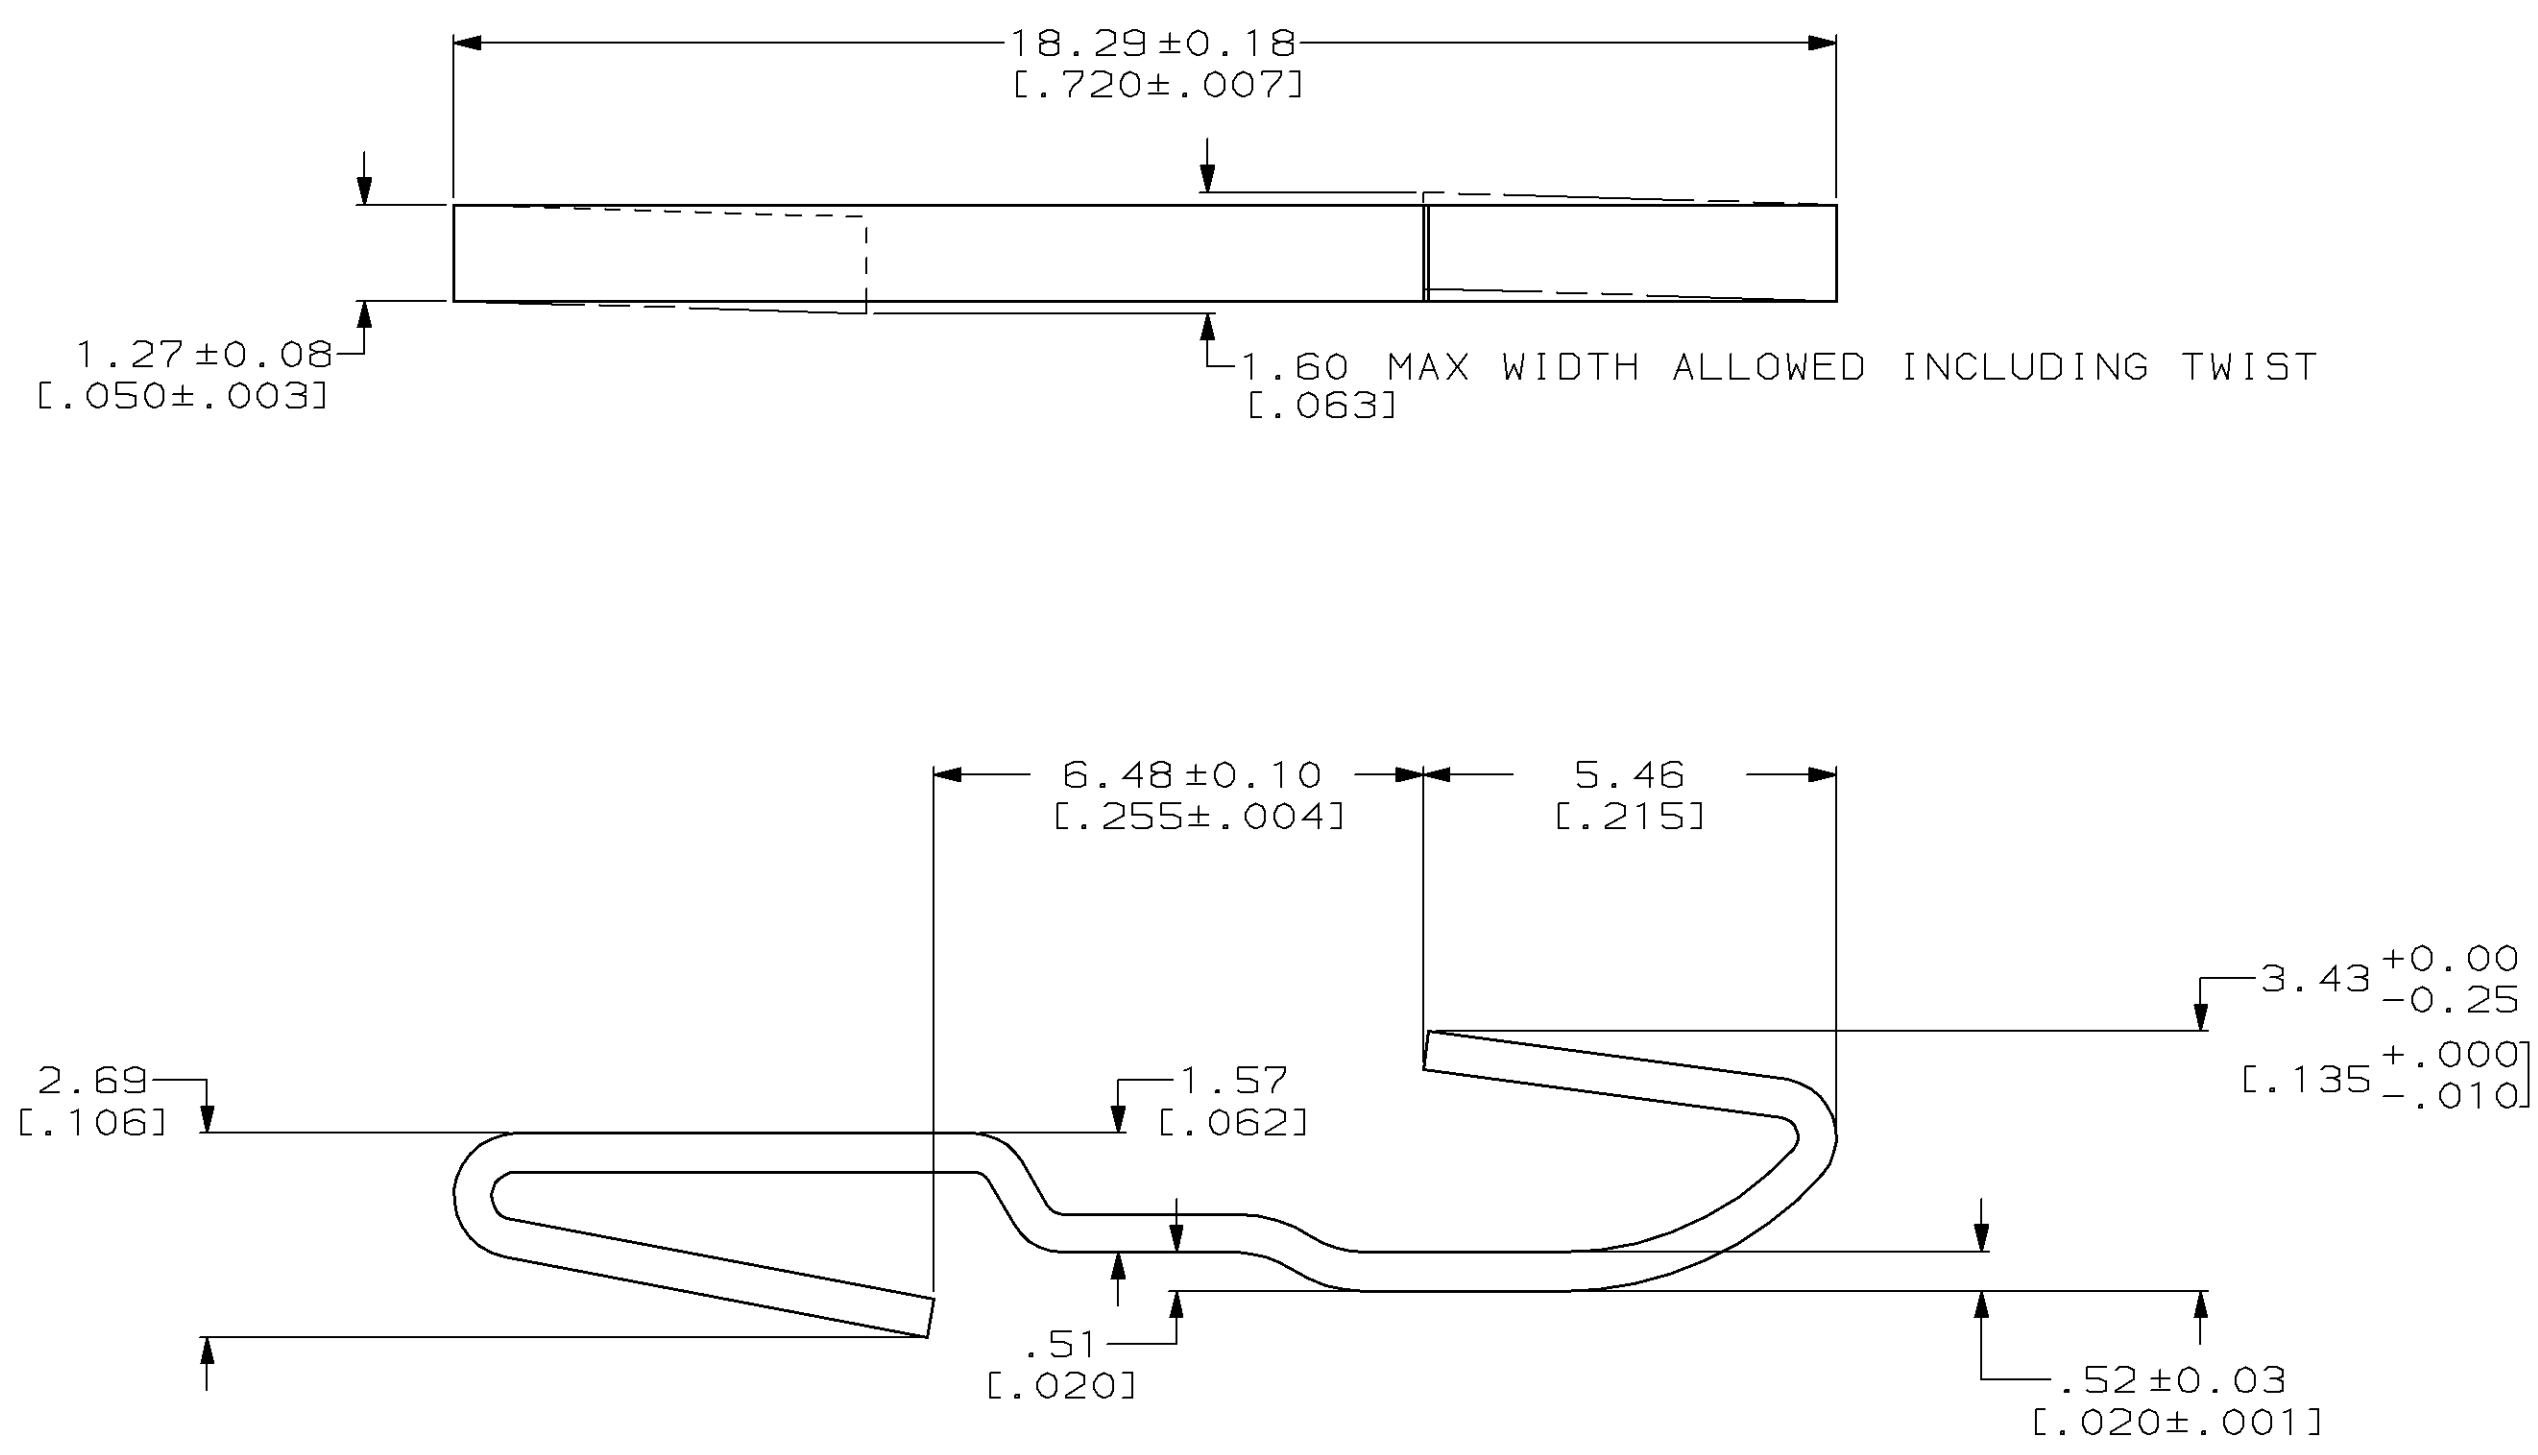

FINISH	PART NO
.000050 NICKEL ALL OVER	583691-4
.000010 GOLD OVER .000050 NICKEL	583691-3
UNPLATED	583691-2

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 8-2-93 A. STAUB BG	AMP Incorporated Harrisburg, PA 17105-3608		
	CHK 2/18/94 H ROSE			NAME
MATERIAL STAINLESS STEEL	APPD 2/18/94 H ROSE	SPRING, RETAINER		
FINISH -	APPD 2/18/94 M THUMMA			
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	APPLICATION SPEC -	SIZE C	CAGE CODE 00779	DRAWING NO G=583691
	WEIGHT -	SCALE 10:1	SHEET 1 OF 1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)