

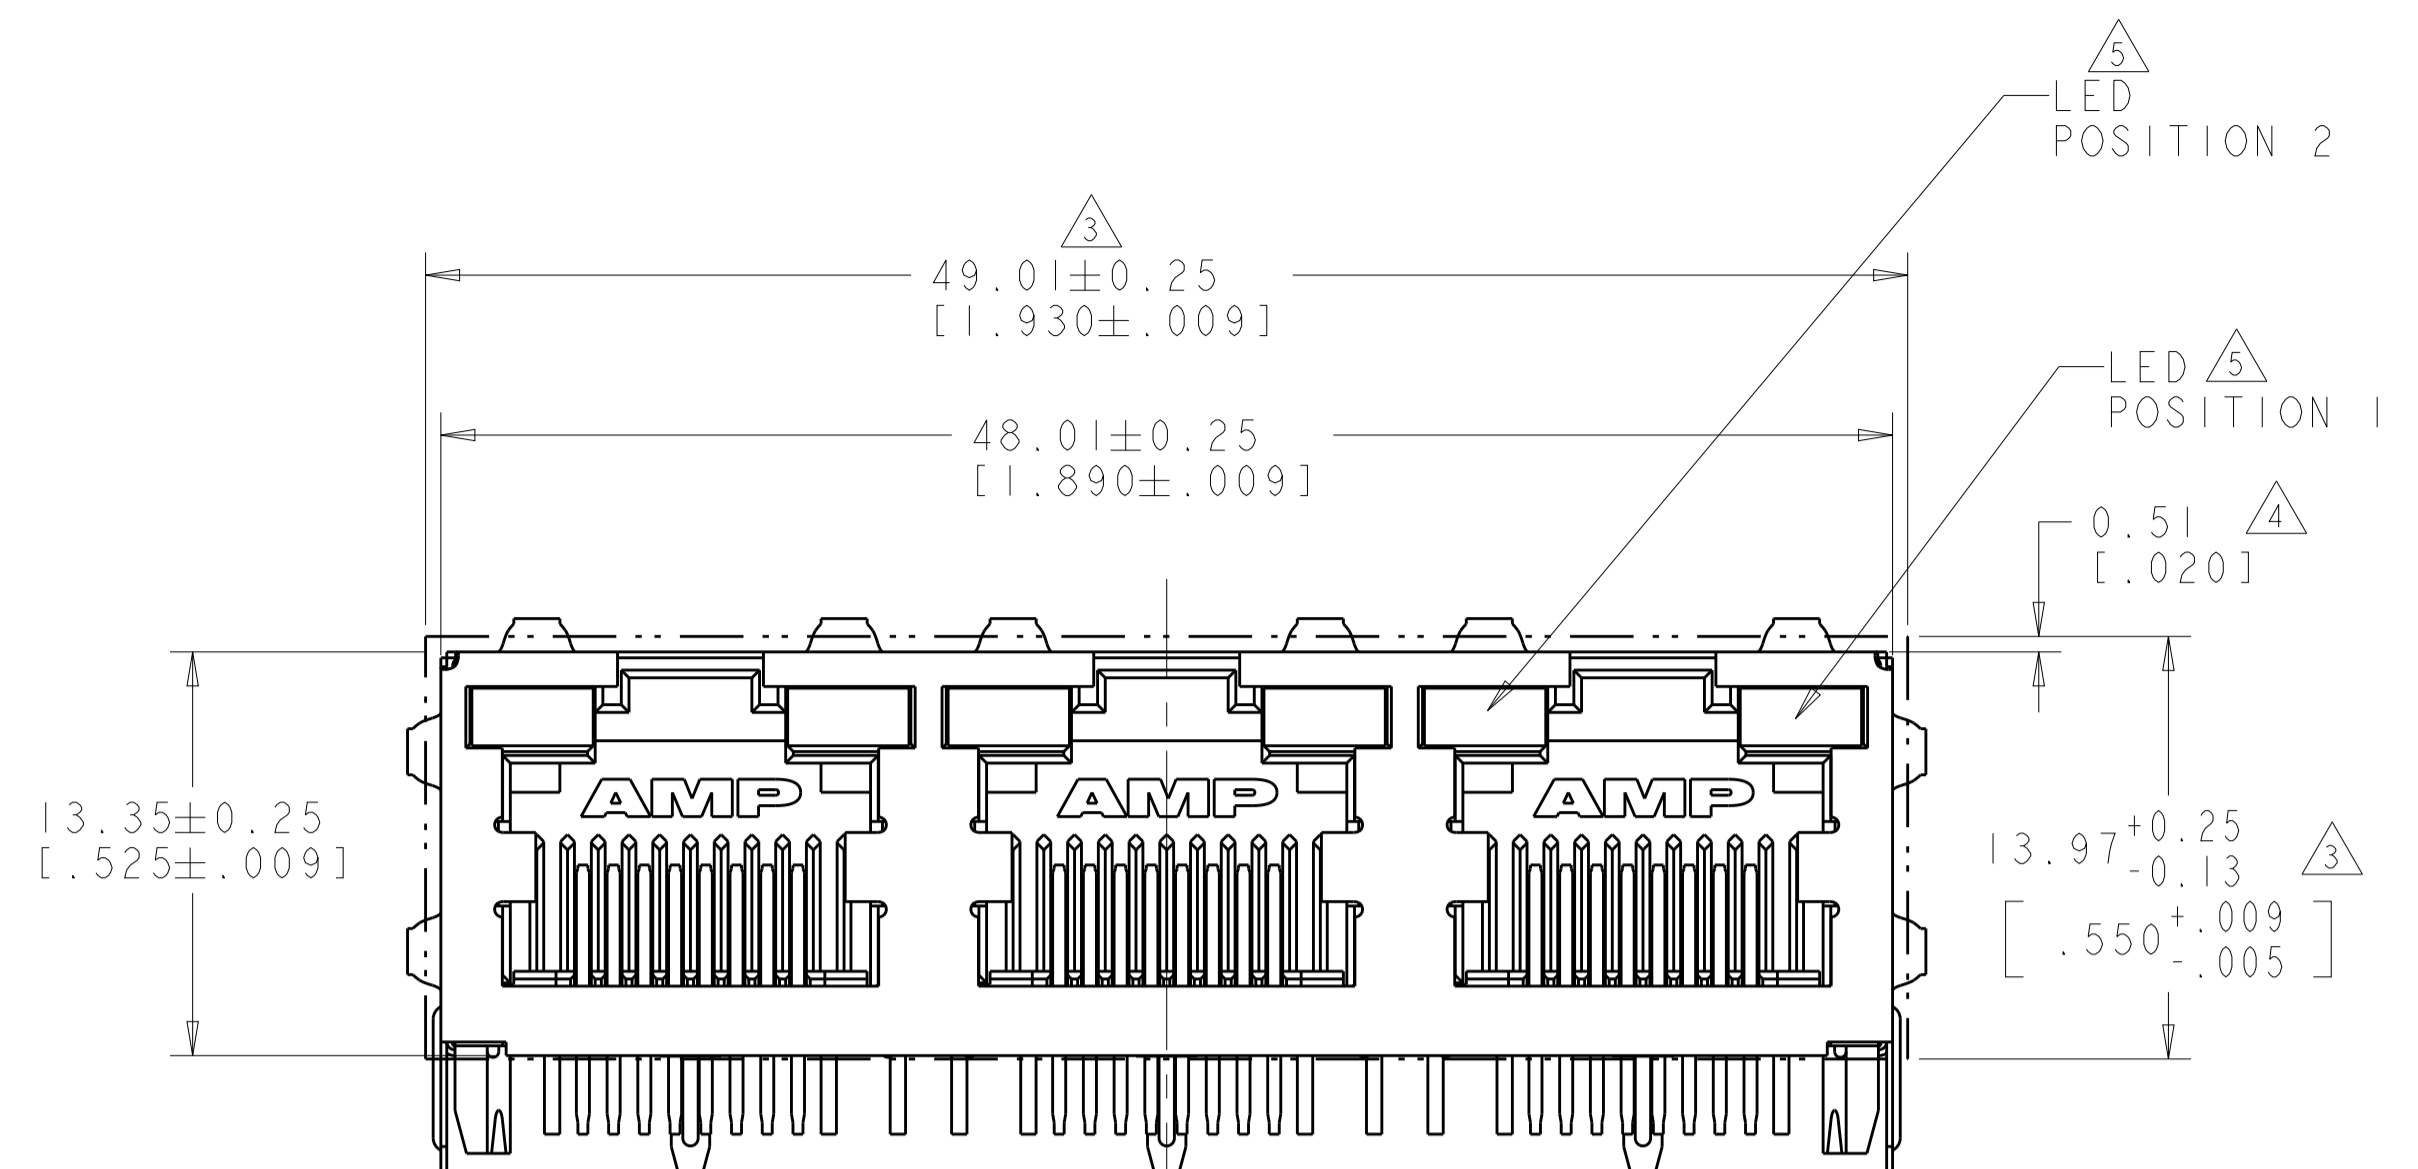


LOC		DIST		REVISIONS				
		P	LTN	DESCRIPTION	DATE	DMN	APVD	
		C		ECO-07-022131	02NOV07	LAM	JW	
		C1		REVISED PER ECO-09-025699	11DEC09	KK	AEG	
		C2		ECO-14-018192	27SEP2018	LL	SH	
		C3		ECO-18-014918	20AUG2019	RR	SH	

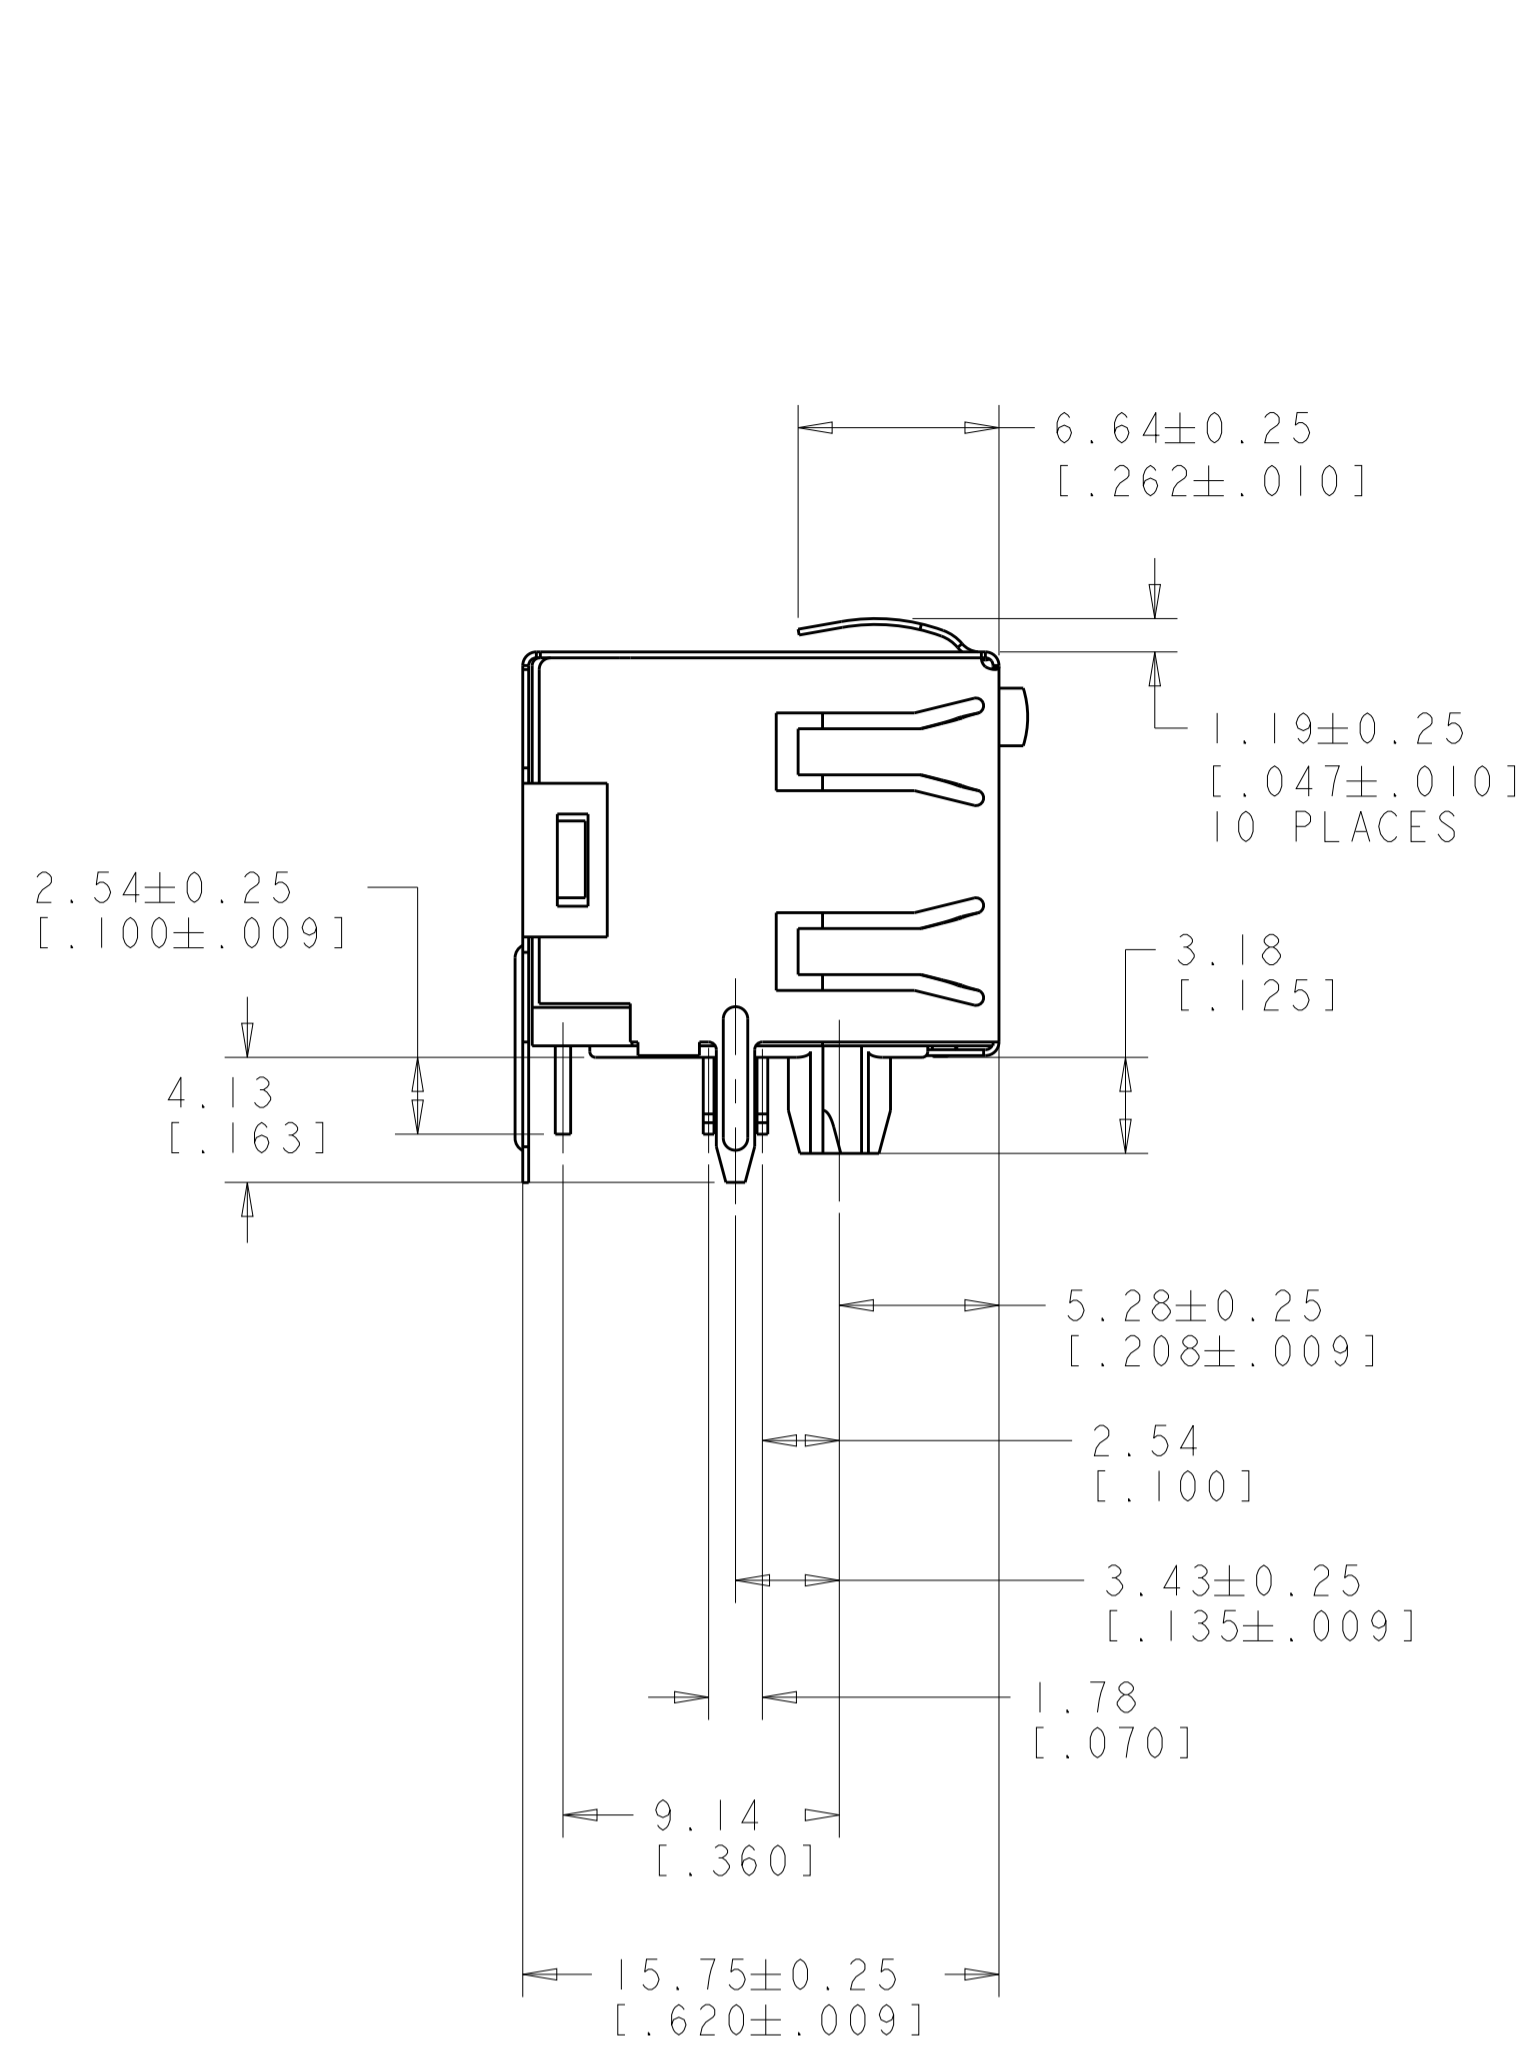


OBSOLETE


- MATERIAL: HOUSING - THERMOPLASTIC, BLACK, UL94V-0. TERMINALS - .36[.014] THICK PHOSPHOR BRONZE PLATED WITH 3.81µm [.000150] MINIMUM THICK BRIGHT TIN-LEAD IN SOLDER AREA, 1.27µm [.000050] MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27µm [.000050] MINIMUM THICK NICKEL. SHIELD - 0.196[.0077] THICK COPPER ZINC ALLOY, PREPLATED WITH 1.27µm [.000050] MINIMUM SATIN NICKEL WITH 2.03µm [.000080] MINIMUM TIN POST DIPPED ON PCB TABS. LIGHT EMITTING DIODE (LED) - DIFFUSED EPOXY LENS 0.51 X 0.51 [.020 X .020] CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm [.000350] TIN/COPPER OVER 2.03µm [.000080] SILVER OVER 1.02µm [.000040] NICKEL UNDERPLATE OVER 2.03µm [.000080] COPPER UNDERPLATE.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- SUGGESTED PANEL OPENING DIMENSIONS.
- SUGGESTED CLEARANCE BETWEEN TOP OF CONNECTOR AND TOP OF PANEL OPENING.
- SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
- THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

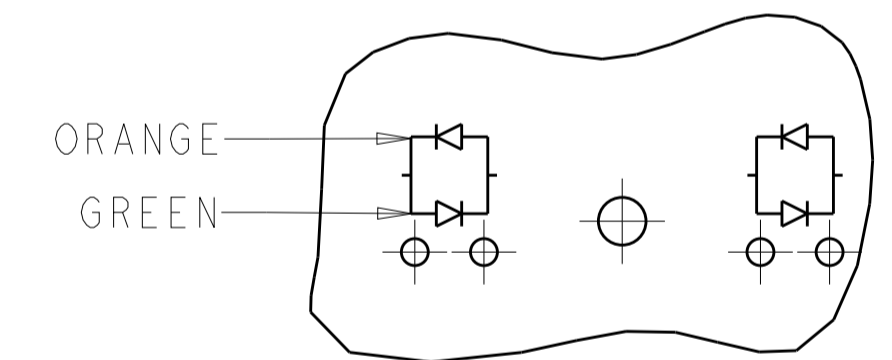


LED CURRENT DIAGRAM 1116132-7 ONLY

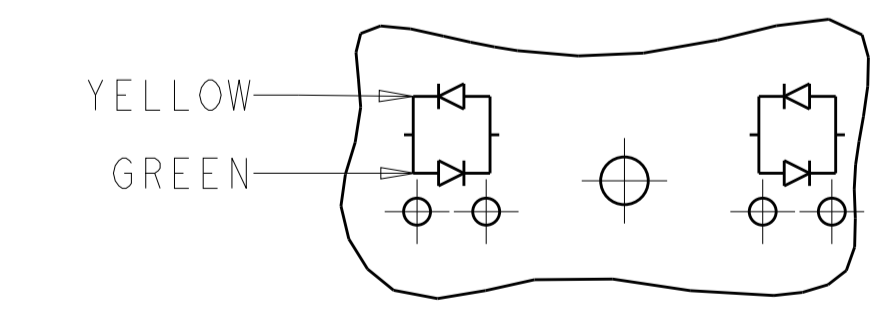

LED CURRENT DIAGRAM 1116132-8 ONLY

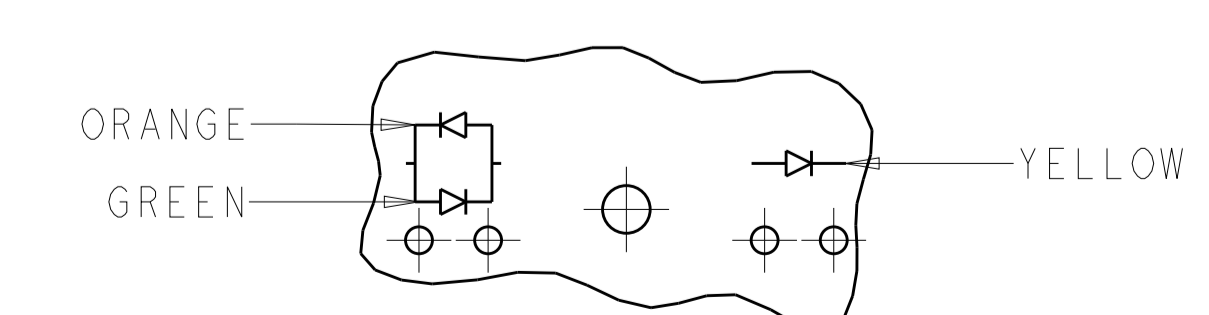

LED CURRENT DIAGRAM 1116132-9 ONLY OBSOLETE

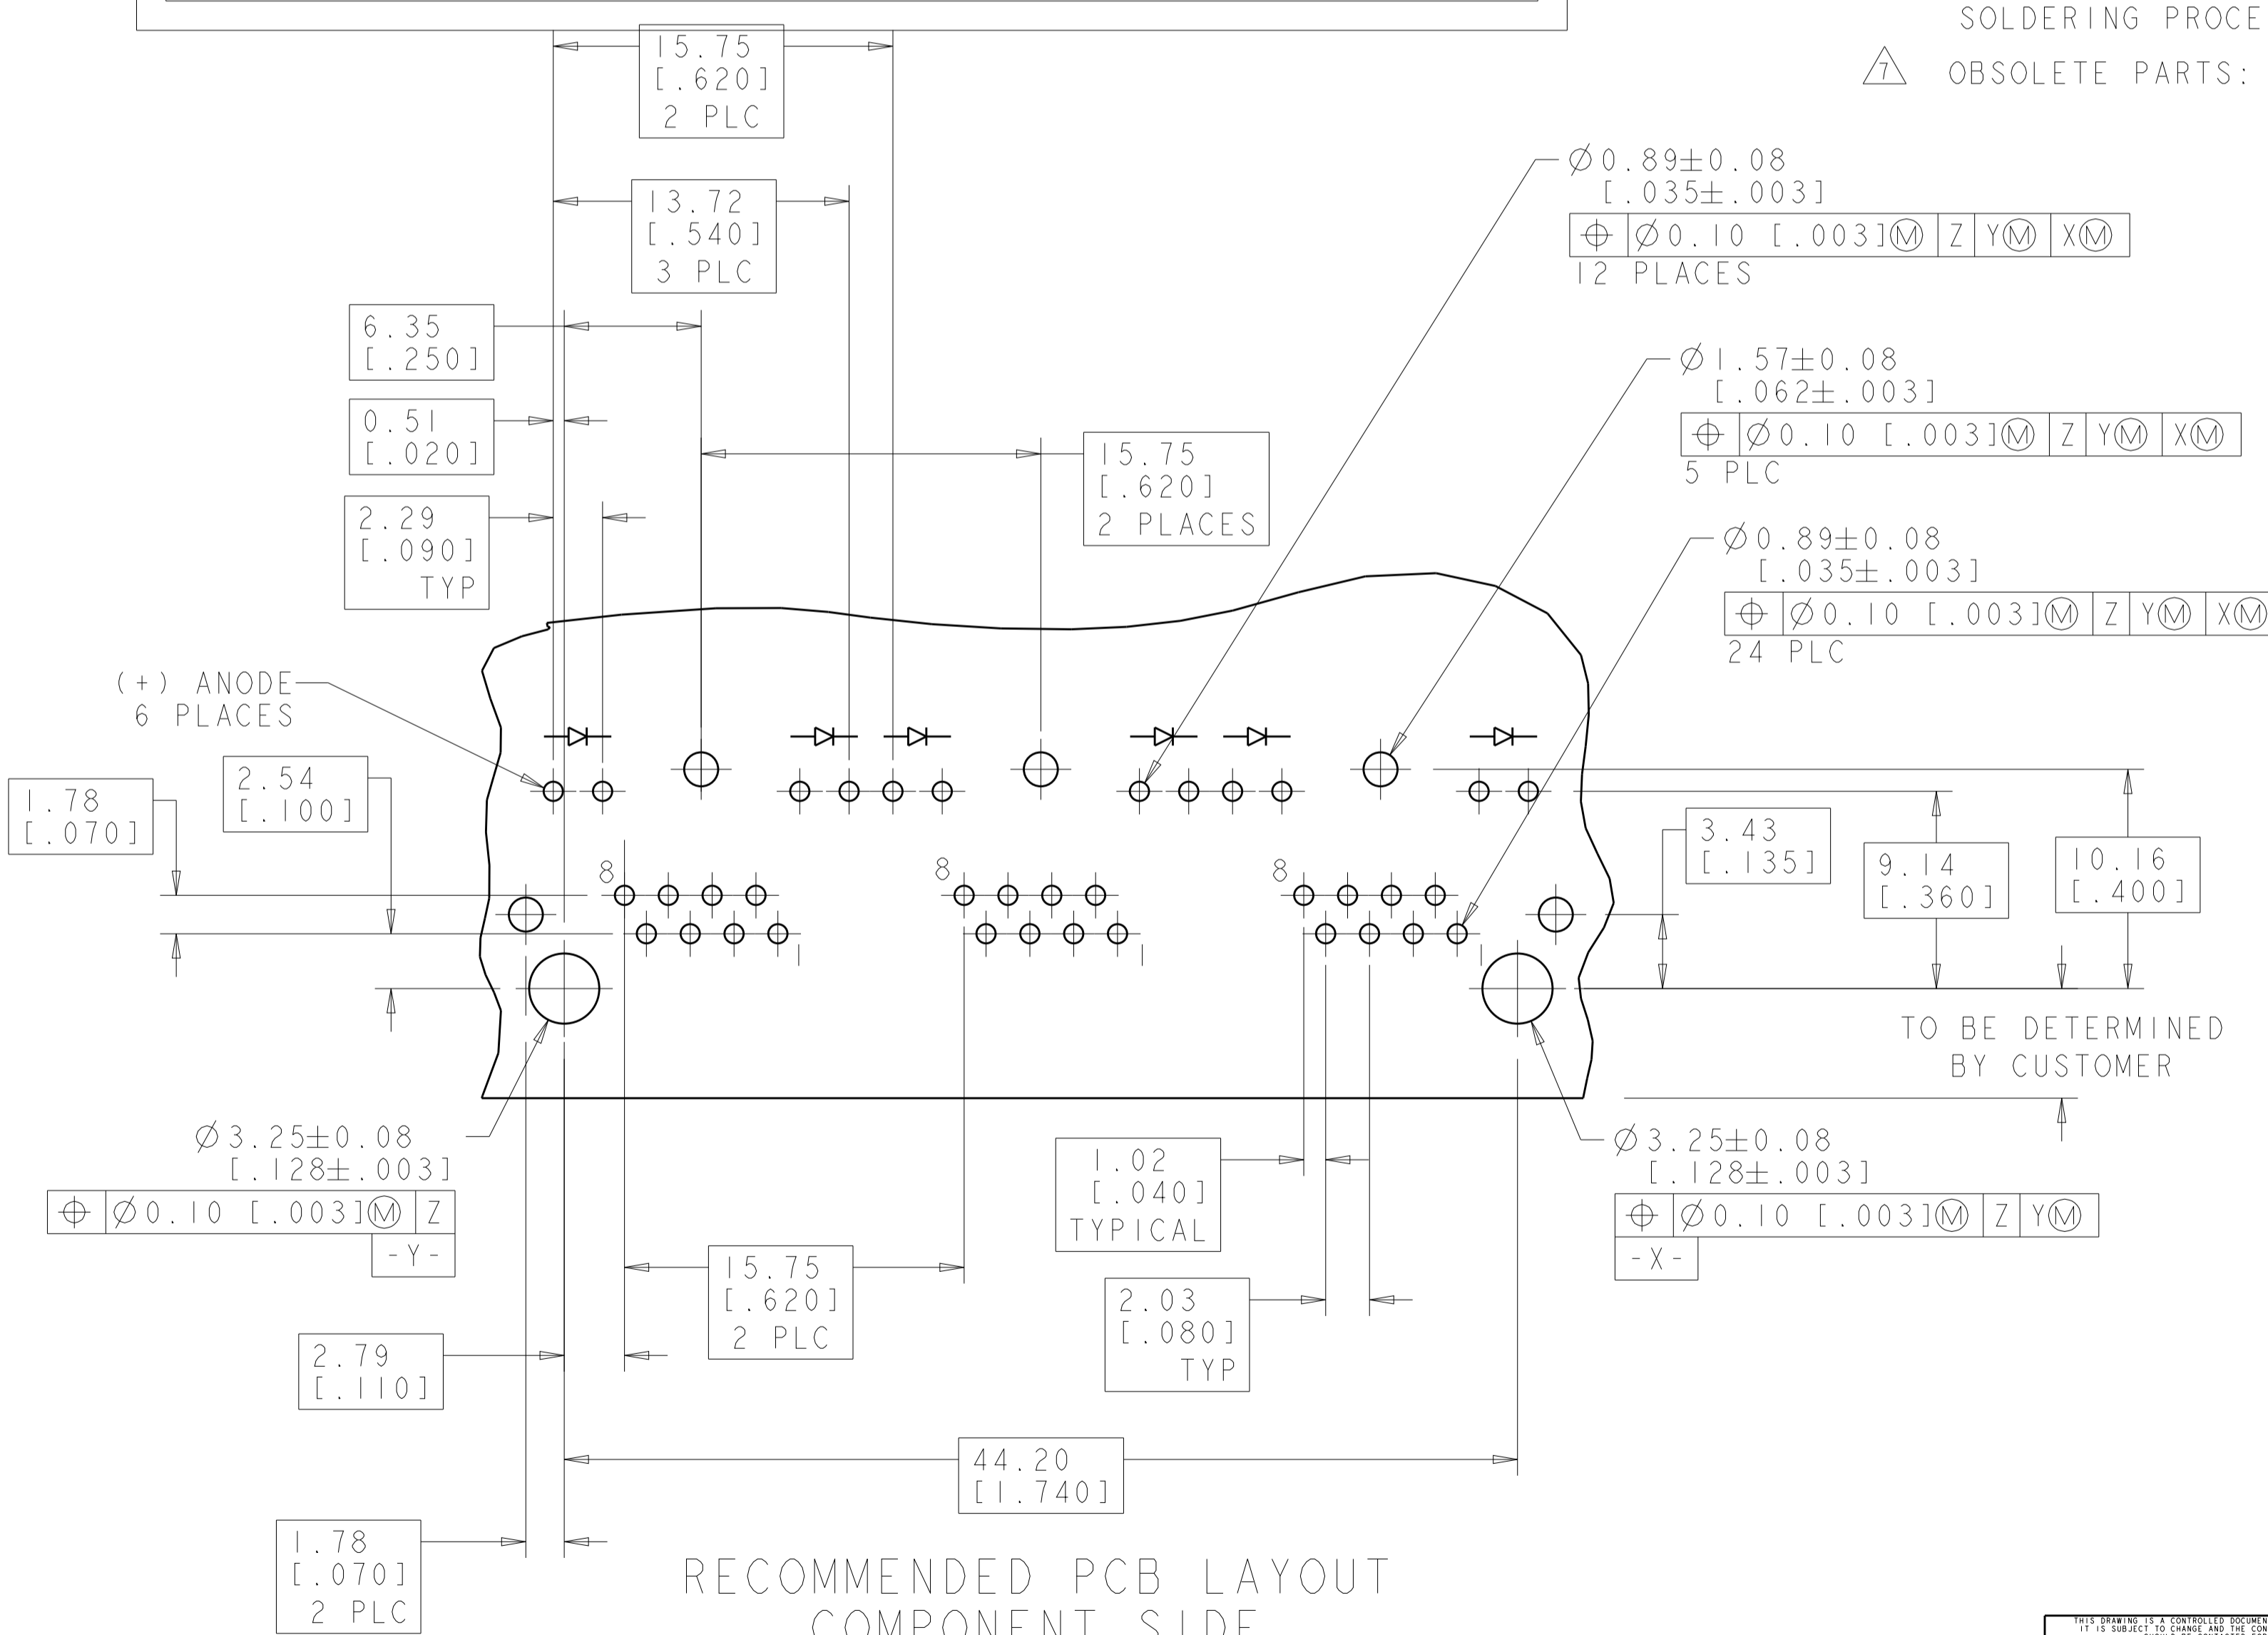

RECOMMENDED PCB LAYOUT COMPONENT SIDE

INDICATOR COLOR	POSITION 2	POSITION 1	PART NUMBER
OBSOLETE ORANGE/GREEN	YELLOW		1116132-9
OBSOLETE YELLOW/GREEN	YELLOW/GREEN		1116132-8
OBSOLETE ORANGE/GREEN	ORANGE/GREEN		1116132-7
SUPERSEDED BY: 6116132-5	YELLOW		1116132-6
	GREEN		1116132-5
OBSOLETE	GREEN	YELLOW	1116132-4
OBSOLETE	YELLOW		1116132-3
OBSOLETE		GREEN	1116132-2
OBSOLETE	YELLOW	GREEN	1116132-1

DIMENSIONS: mm [INCH] TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.01 2 PLC ±.0131(.005) 3 PLC ± 4 PLC ± ANGLES ±.1°		DWN J. AHERON 29JUL98 CHK J. WESTMAN 13OCT07 APVD E. LAUBER 29JUL98 PRODUCT SPEC 108-1163-4 APPLICATION SPEC 114-2154 WEIGHT CUSTOMER DRAWING		Tyco Electronics Corporation Harrisburg, PA 17105-3608 NAME INVERTED MODULAR JACK ASSEMBLY, 1 X 3, SHIELDED, PANEL GROUND TABS, LED SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779C=1116132 SCALE 4:1 SHEET 1 OF 1 REV C3	
---	--	---	--	---	--

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)