

# SPECIFICATION CONTROL DRAWING

**55PC022A**


TITLE TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT

Date 12-6-96

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC021A

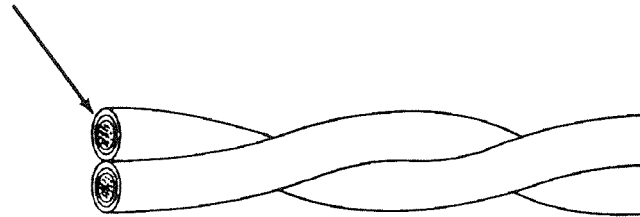

### CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER ( in. )			WEIGHT ( lbs/1000 ft. )	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC022A-26-*	26	.069	.072	.075	2.94	3.14

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 INSULATION FLAWS:  
 Impulse Dielectric Test, 8.0 kV (peak)

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.  
 Example: AWG 26, white and black component wires;  
 55PC022A-26-9/0

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)