SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

LL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2, # 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP/40°C, 120/250VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.21mA @ 120V, 60Hz 0.36mA @ 250V, 50Hz

DPERATING AMBIENT TEMP. RANGE: -10°C TD +40°C @ RATED CURRENT, I_r . IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM DPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_1 - \sqrt{100 - T_0}$

 $I_0 = I_r - \sqrt{\frac{100 - T_0}{60}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES I_r FOR 8 SECONDS

TEST SPECIFICATIONS:

INDUCTANCE: 4.56mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

CATALOG # 20EP1

APPRVD. DATE
PJD 30DEC08

LINE TO GROUND: 0.0056µF ±20% LINE TO LINE: 2.0014µF ±20% DISCHARGE RESISTOR: 165K ∩

L/G AND L/L I.R.

ND DISCHARGE RESISTOR: 6000M (MIN.) @ 100VDC,

20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500VAC OR 2250VDC FOR 1 MINUTE

LINE TO LINE: 1450VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

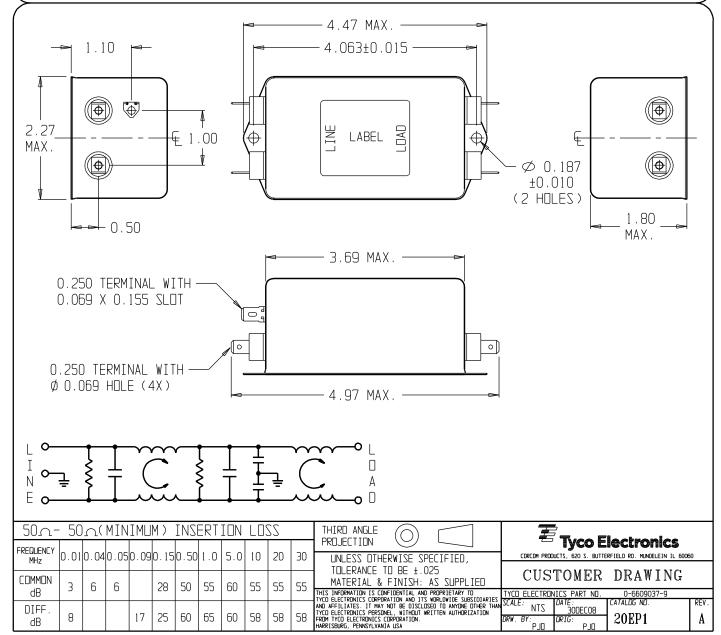

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)