

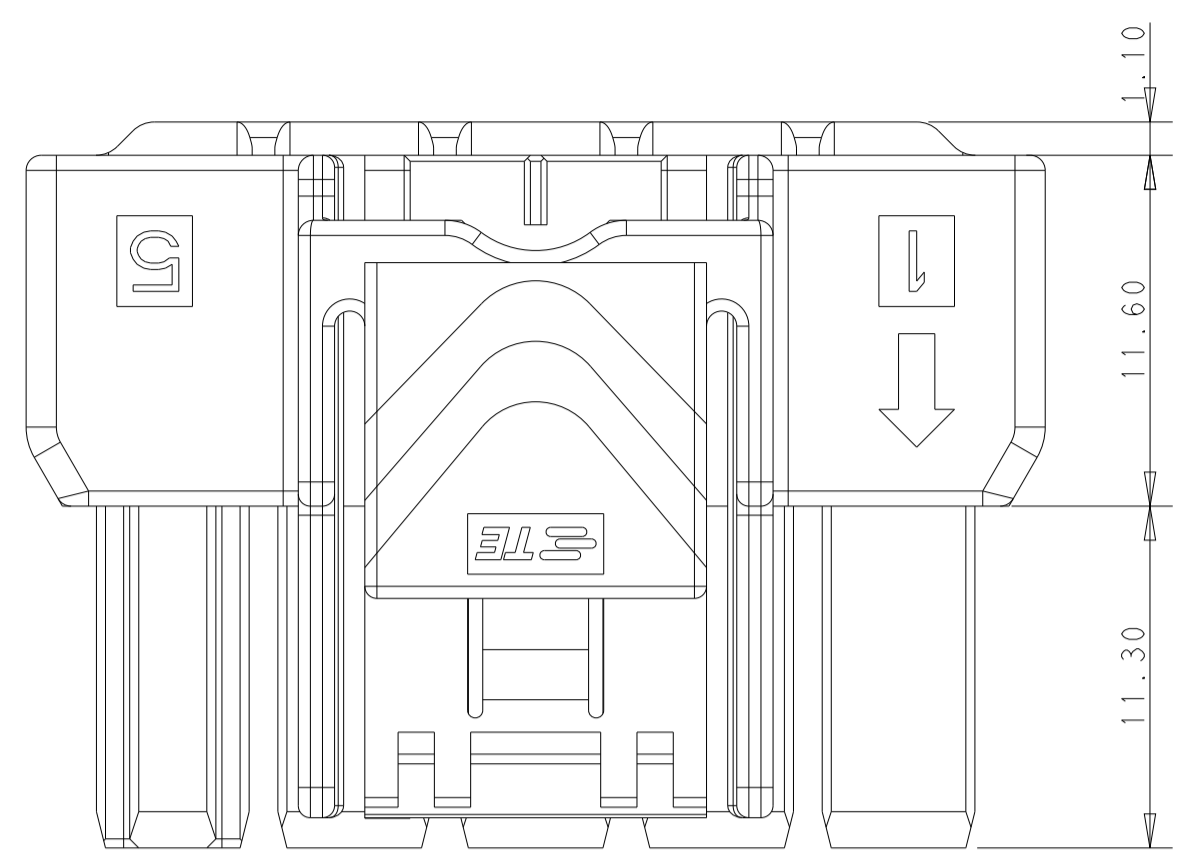
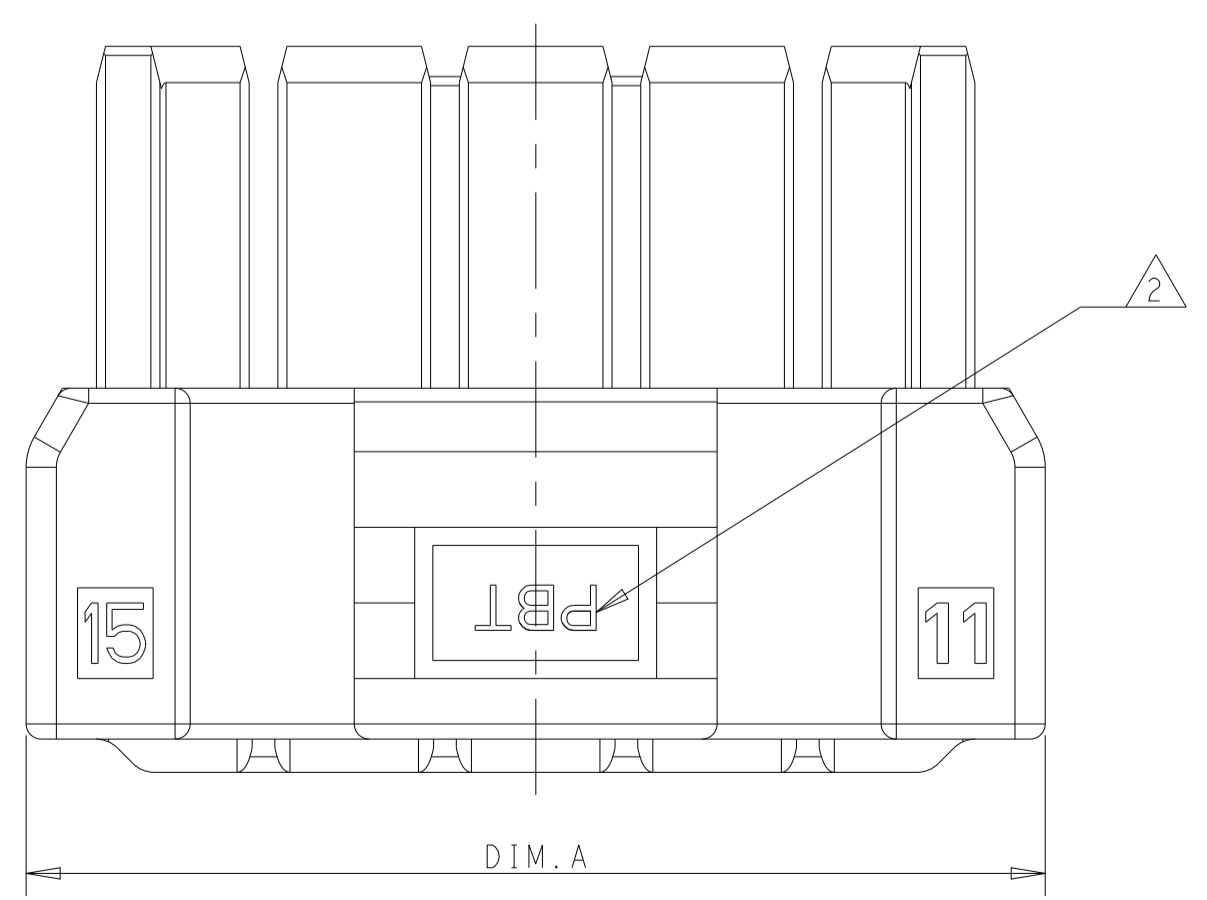
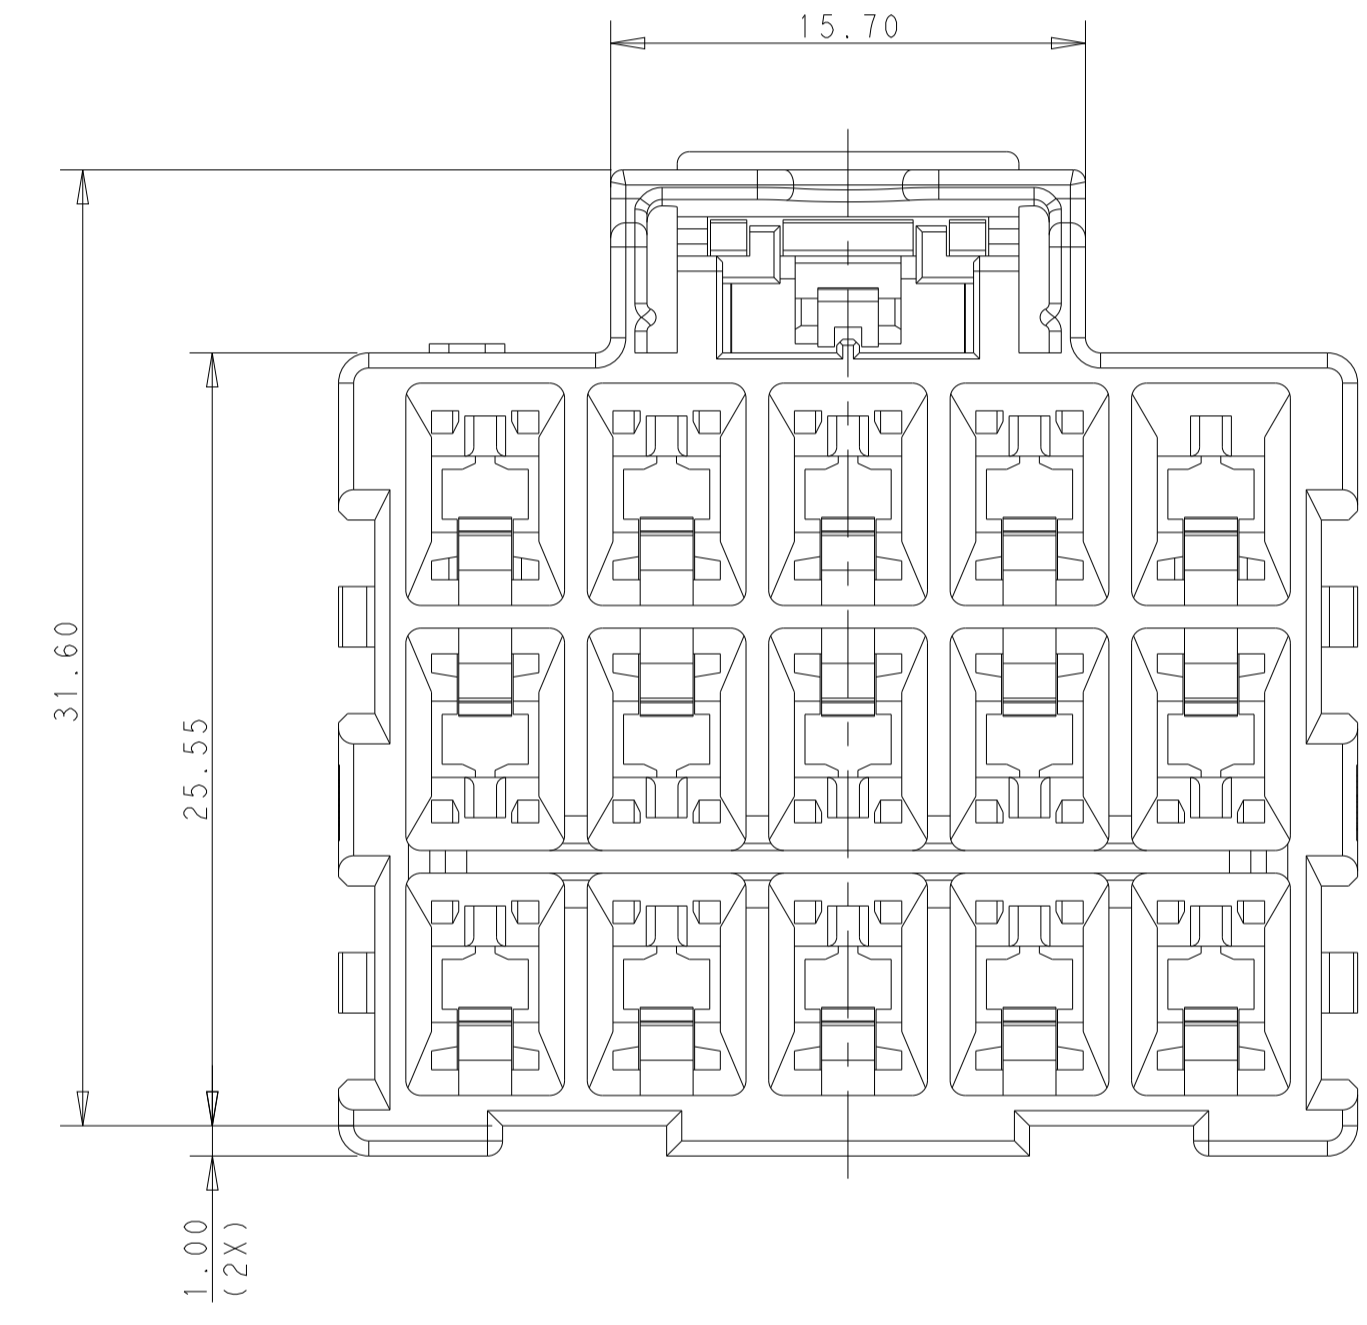


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
E		REVISED PER ECR-21-100678	08APR2021	SS VS
F		REVISED PER ECR-20-100915	28APR2021	JP VS

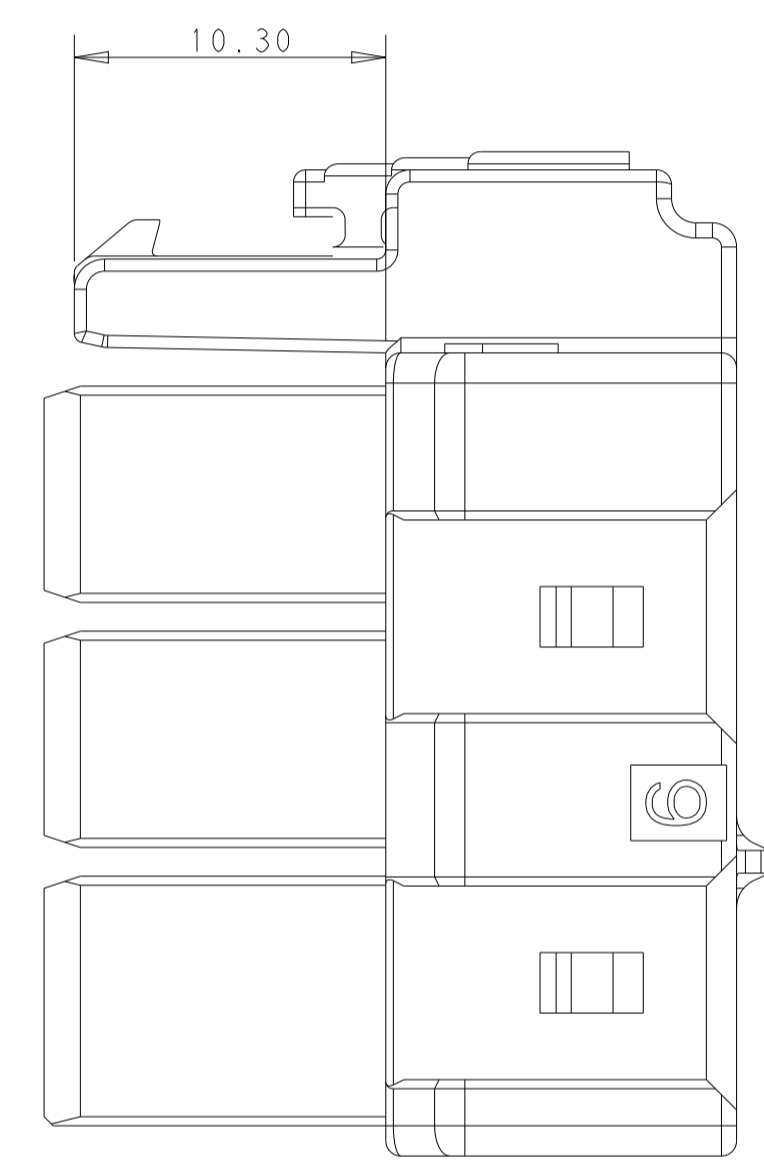







POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

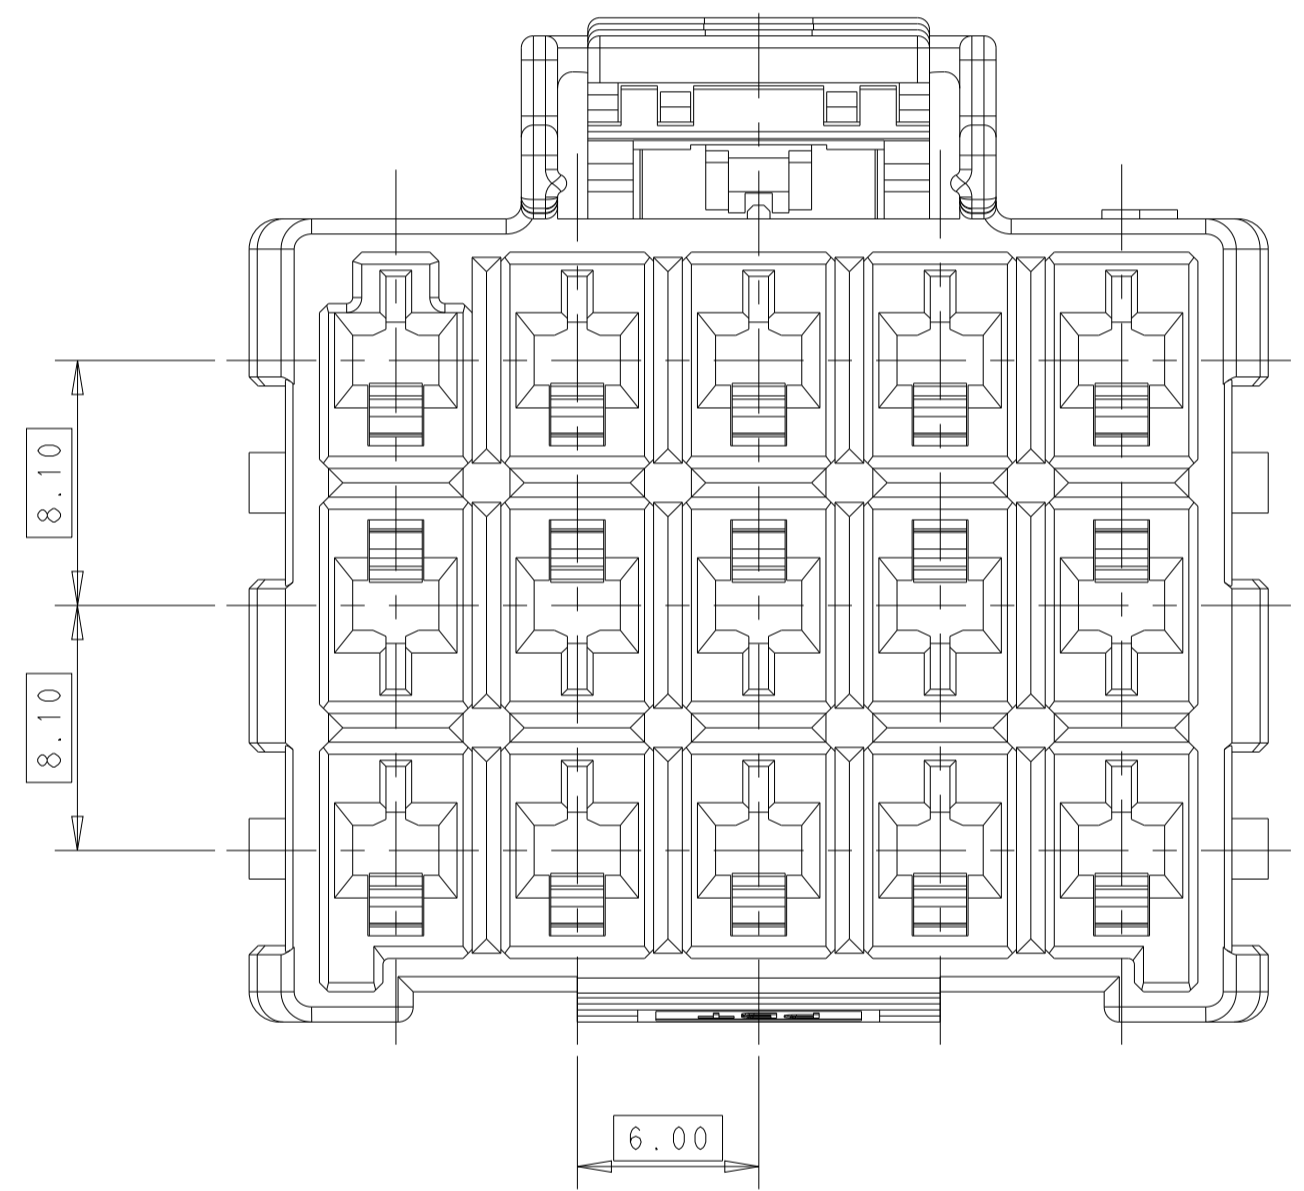

- △ MATERIAL:
 LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
 KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
 LEVEL 2: PA66, HIGH TEMPERATURE 150°C
 KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D: NATURAL
- △ MATERIAL MARK:
 LEVEL 1: PBT, LEVEL 2: HDT
- 3. APPLICABLE CONTACT P/N
 RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-*, 2238066-*
- 4. MATING CONN. P/N
 CAP HSG: *-1971874/5-*,
 DOUBLE ROW LOCK PLATE: *-1971778-*, SINGLE ROW LOCK PLATE: *-1971777-*
- △ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: TOMMY WU 09JUL2012	TE Connectivity
DIMENSIONS: mm		CHK: HAPYE WU 09JUL2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YUHONG MAO 09JUL2012	NAME: PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK
0 PLC	±0.35	PRODUCT SPEC	108-106118
2 PLC	±0.25	APPLICATION SPEC	114-106118
3 PLC	±	SIZE	A100779
4 PLC	±	CAGE CODE	C=1971876
ANGLES	±	DRAWING NO	1
FINISH	-	RESTRICTED TO	2
MATERIAL	-	WEIGHT	REV F
Customer Drawing		SCALE	3:1

REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

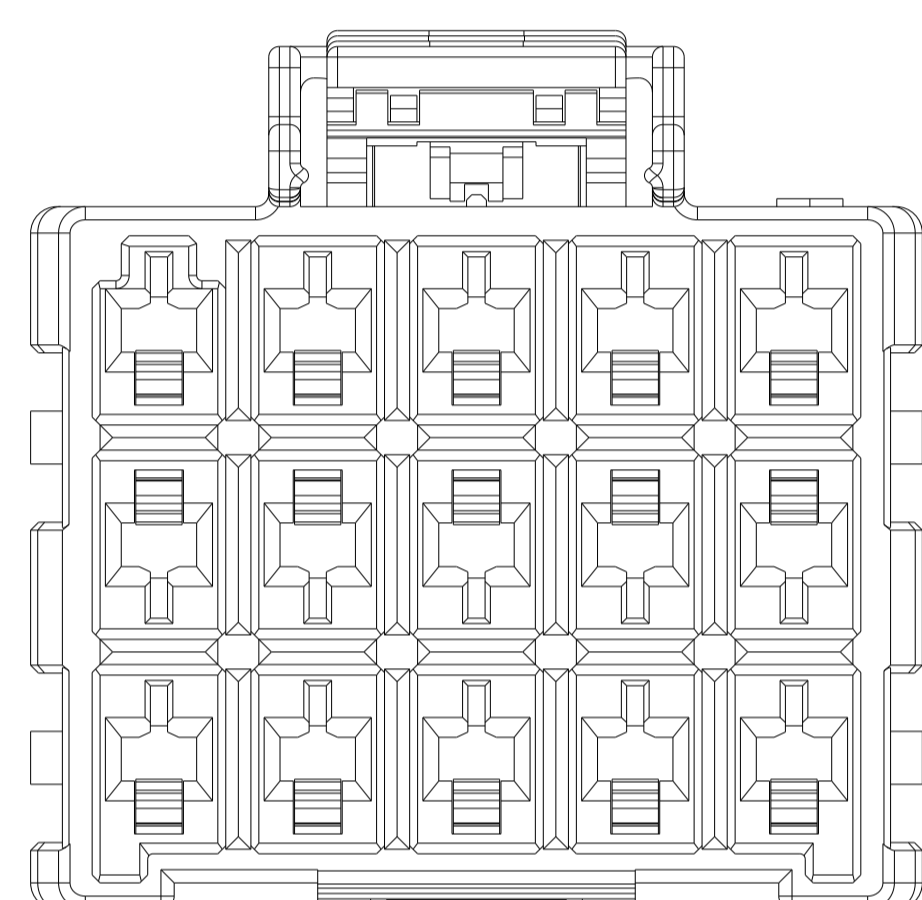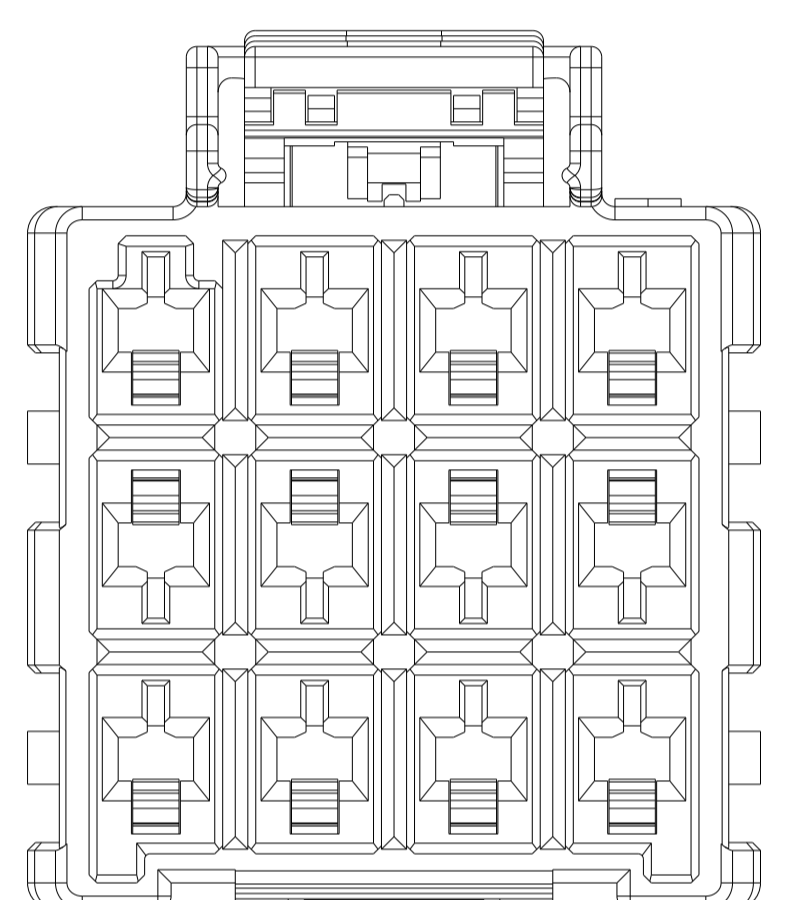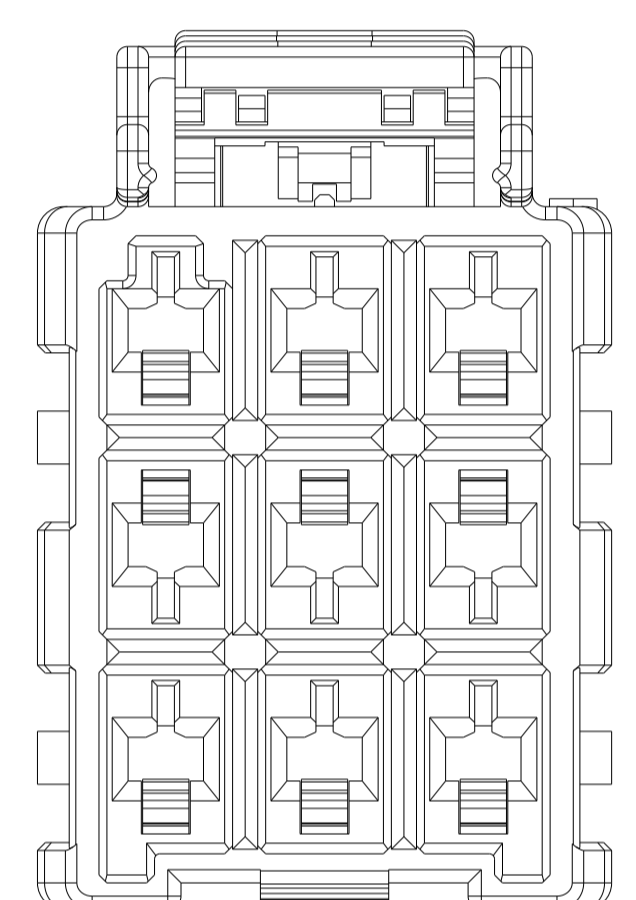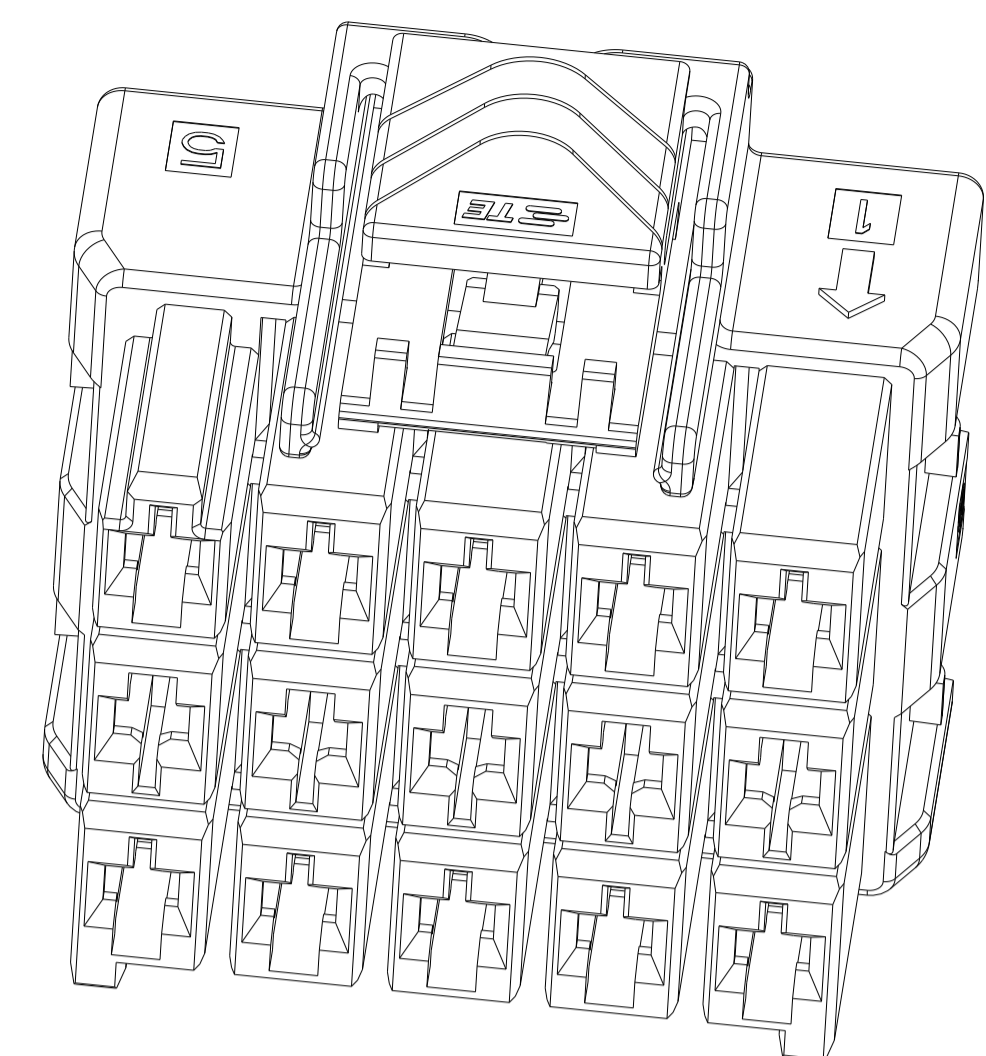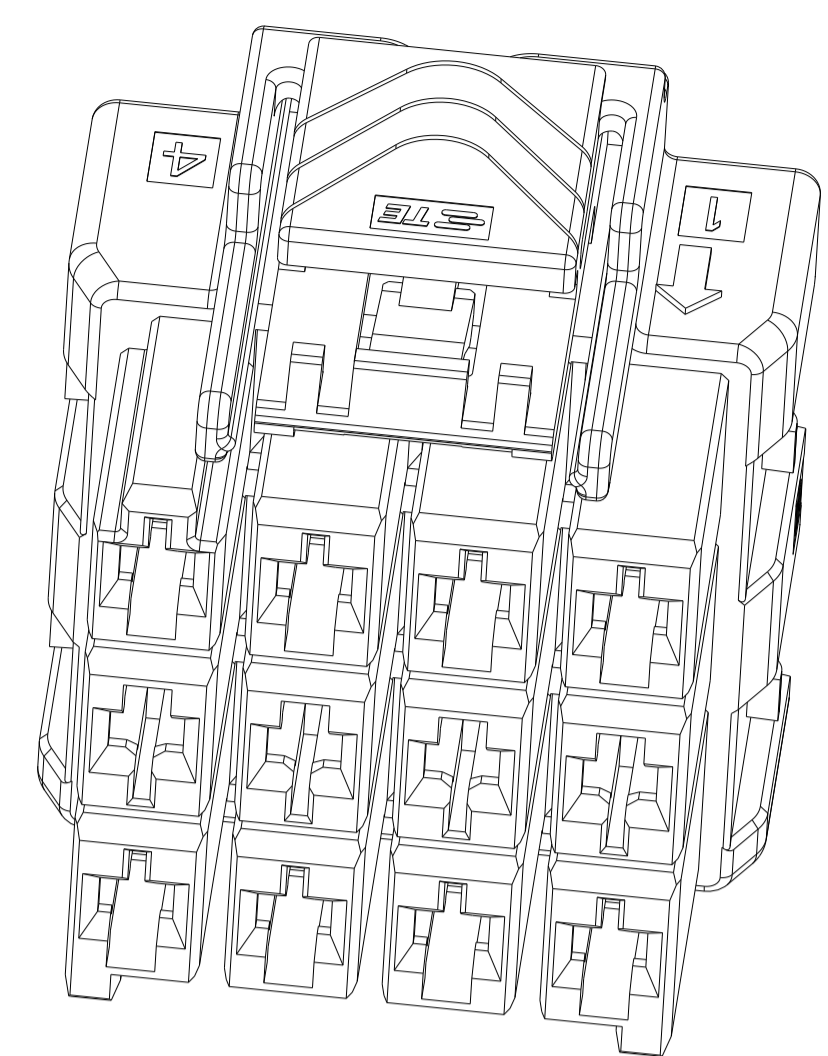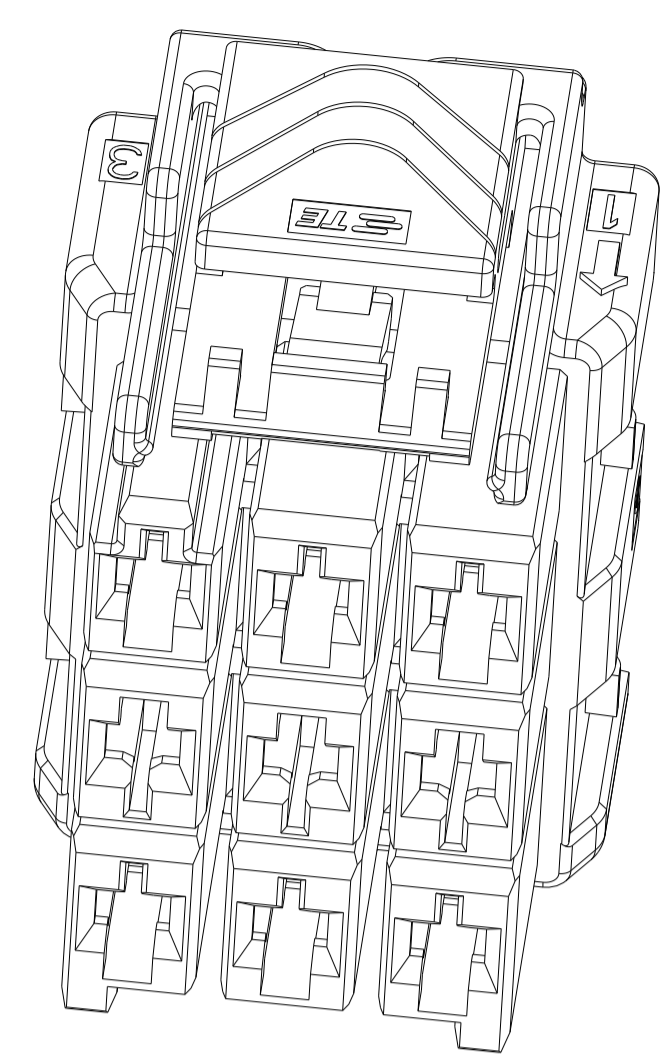


3*3 POSITIONS


3*4 POSITIONS

3*5 POSITIONS


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*5	LEVEL 2	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*4	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*4	LEVEL 2	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N

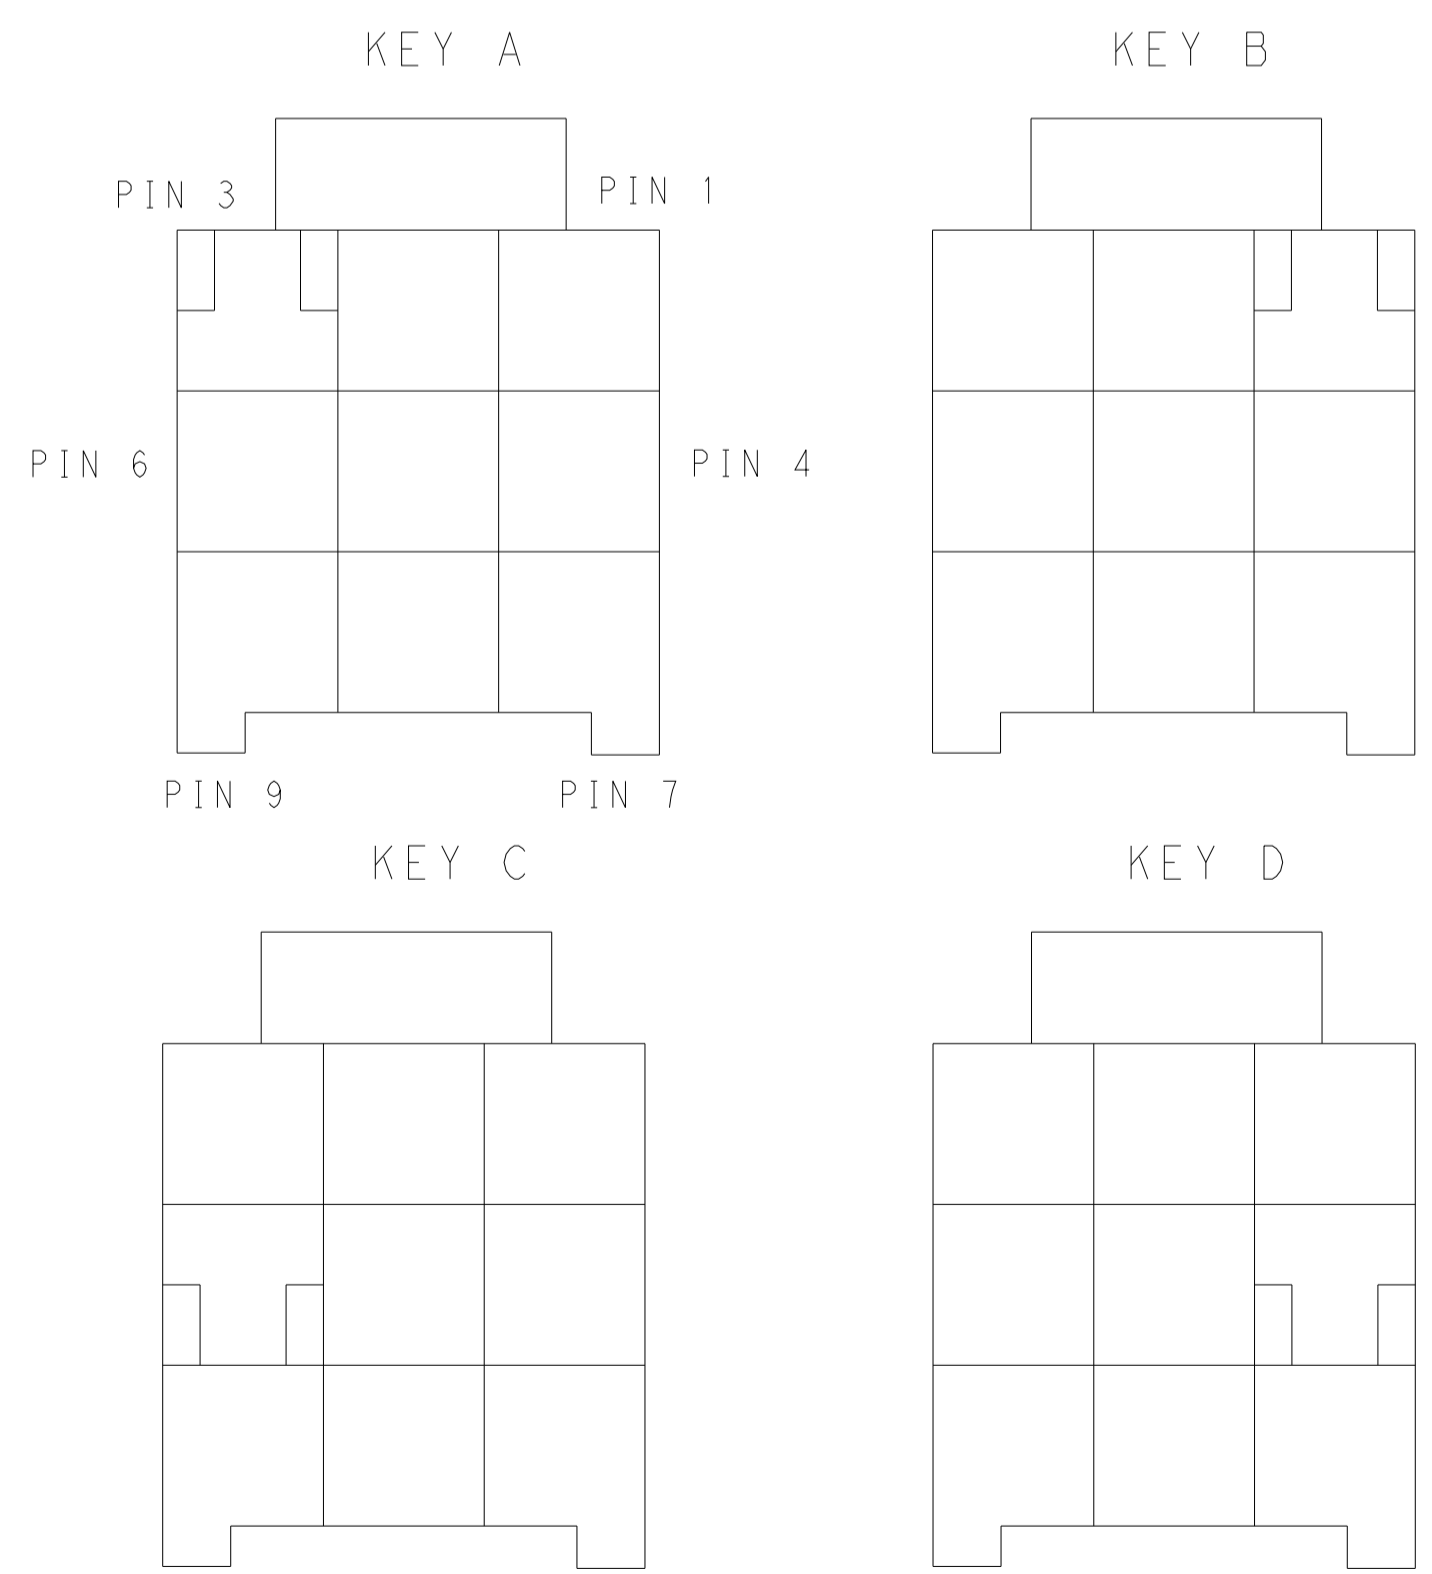

KEYING FOR 3*3 POS.

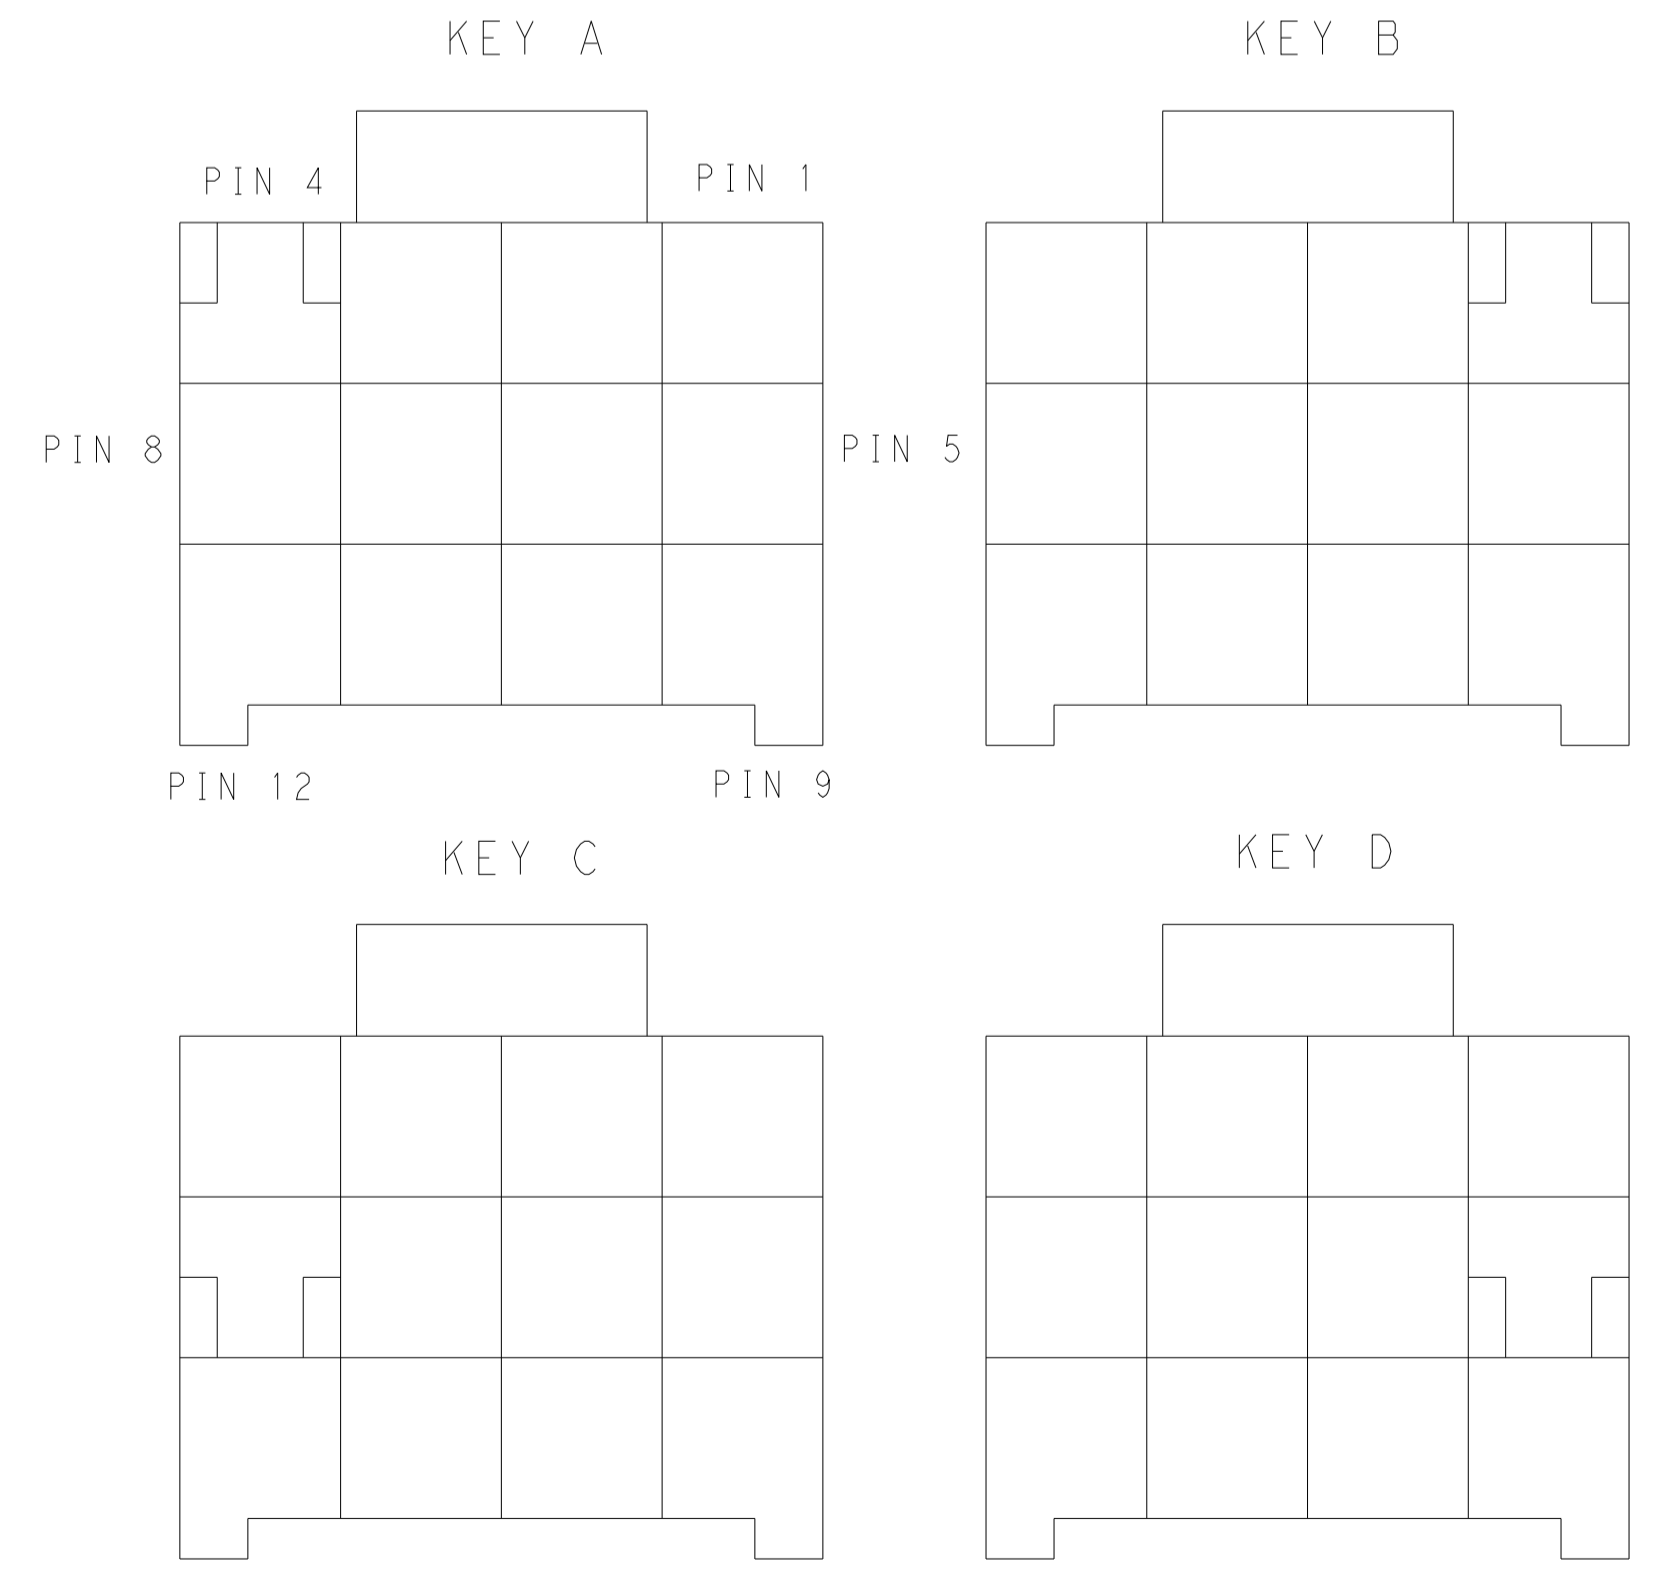

KEYING FOR 3*4 POS.

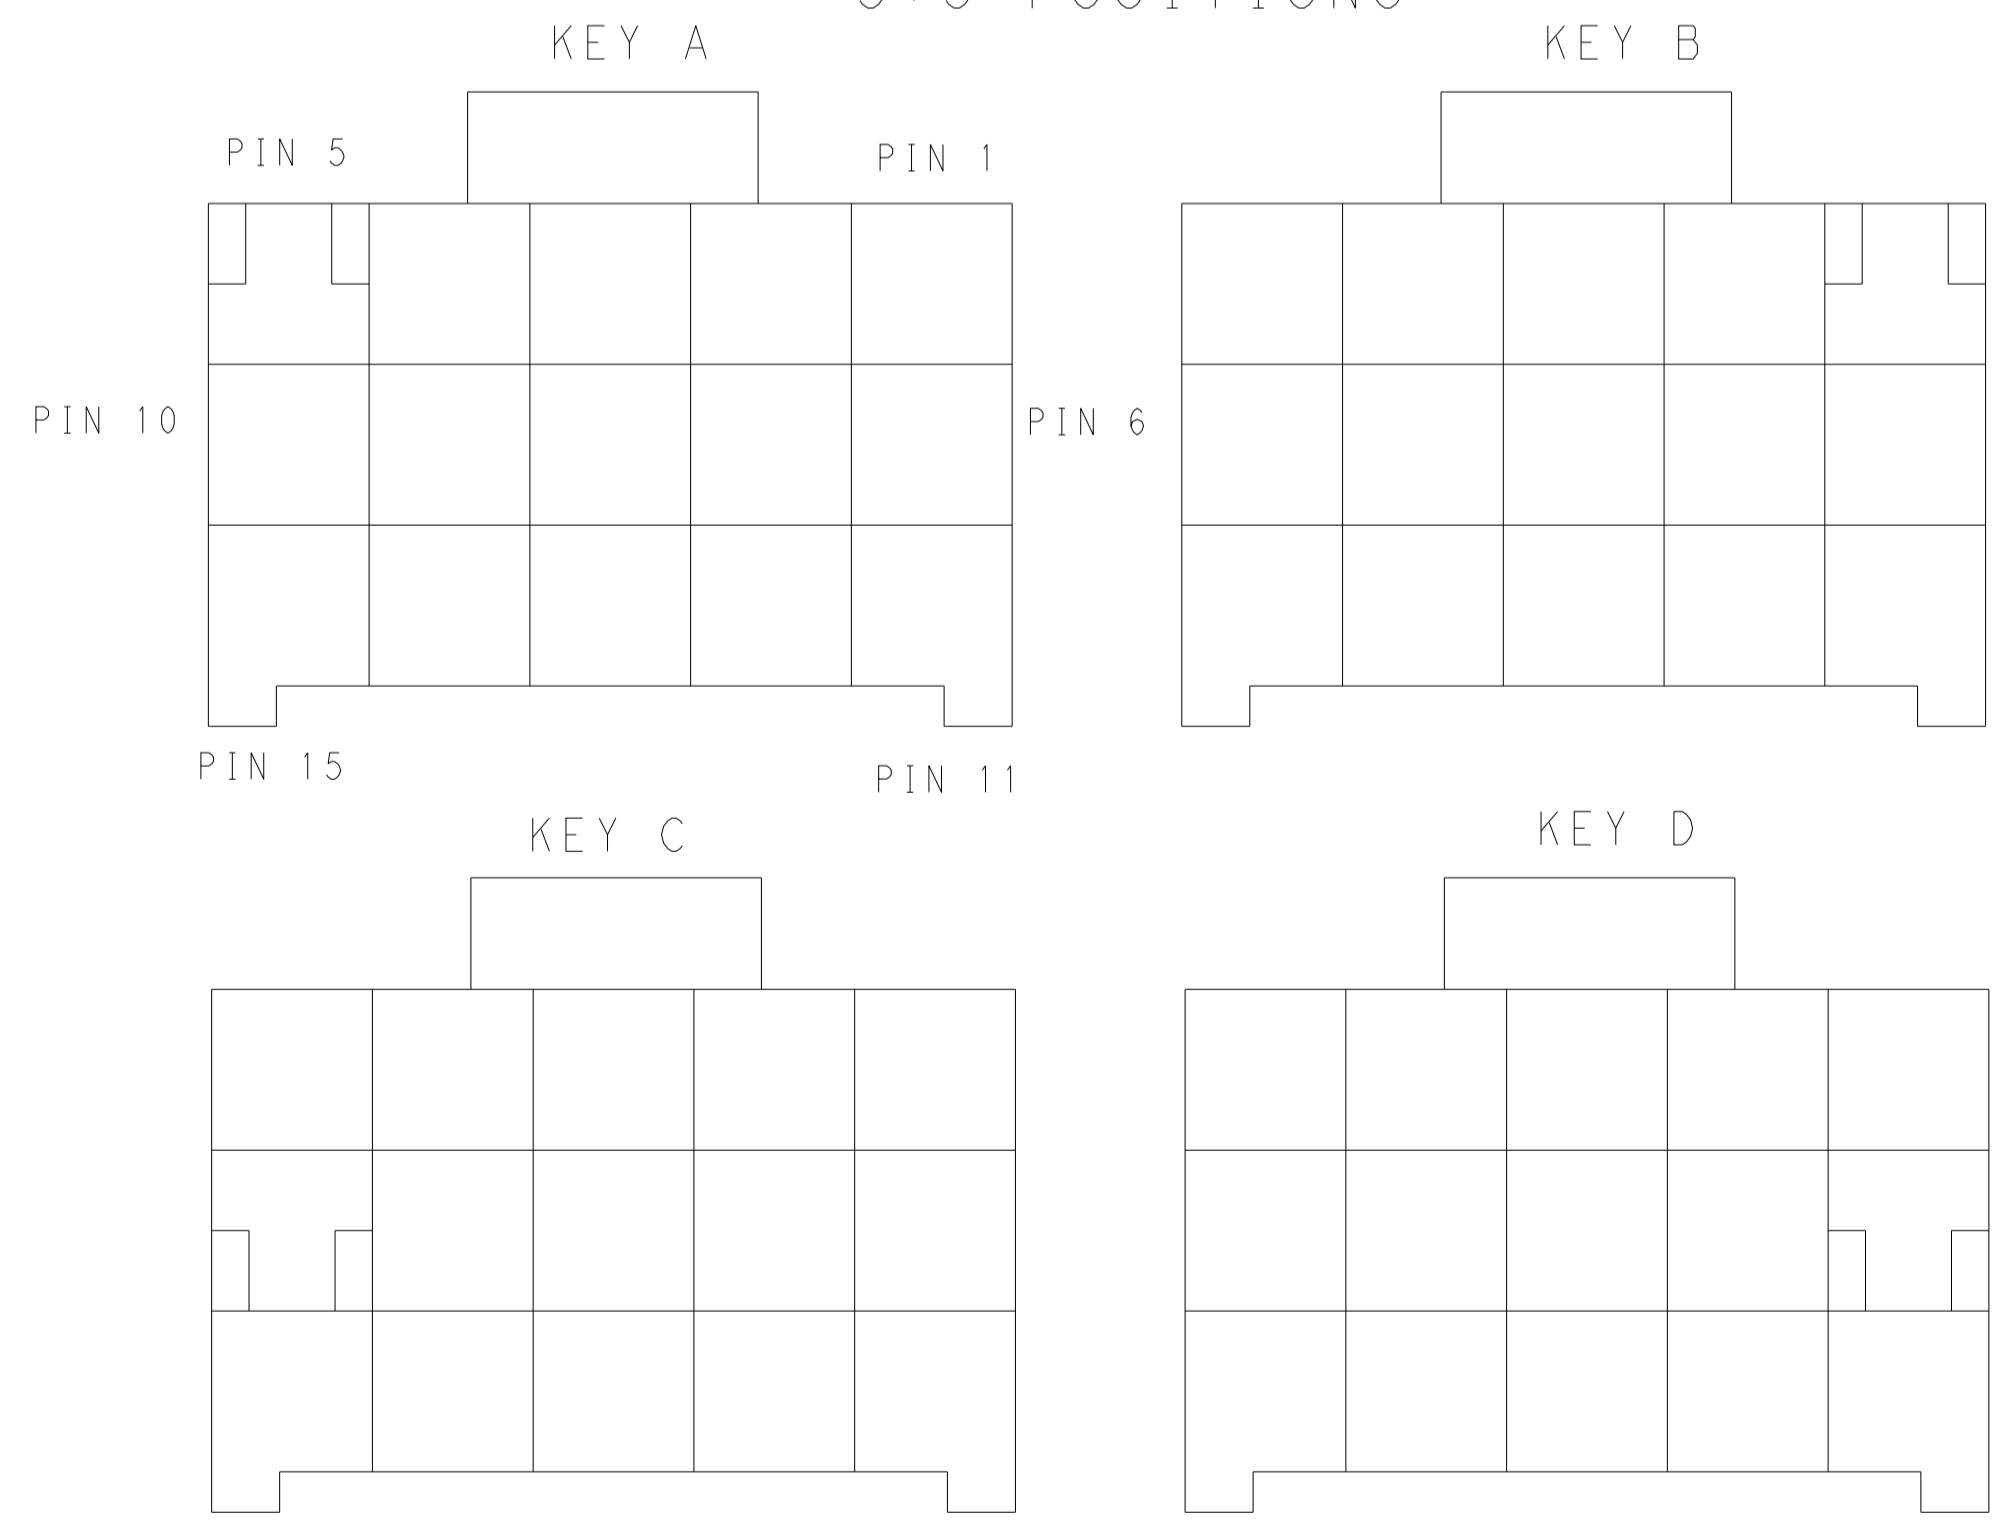

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN TOMMY WU 09JUL2012	TE Connectivity
mm	0 PLC ±0.35	CHK HAPYE WU 09JUL2012	
	1 PLC ±0.25	APVD YUHONG MAO 09JUL2012	
	2 PLC ±	NAME	PLUG HOUSING, TRIPLE ROW
	3 PLC ±	PRODUCT SPEC	POWER TRIPLE LOCK
	4 PLC ±	APPLICATION SPEC	
	ANGLES ±	SIZE	114-106118
	FINISH	WEIGHT	114-106118
MATERIAL		Customer Drawing	A100779C=1971876
		SCALE	SHEET 2 OF 2
			REV F

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)