



| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| AD | 00 | M | | EC 0G3C 0759 04 | 28JAN05 | BSV | JLG |
| | | M1 | | REVISED PER ECO-09-020689 | 28AUG09 | KK | AEG |

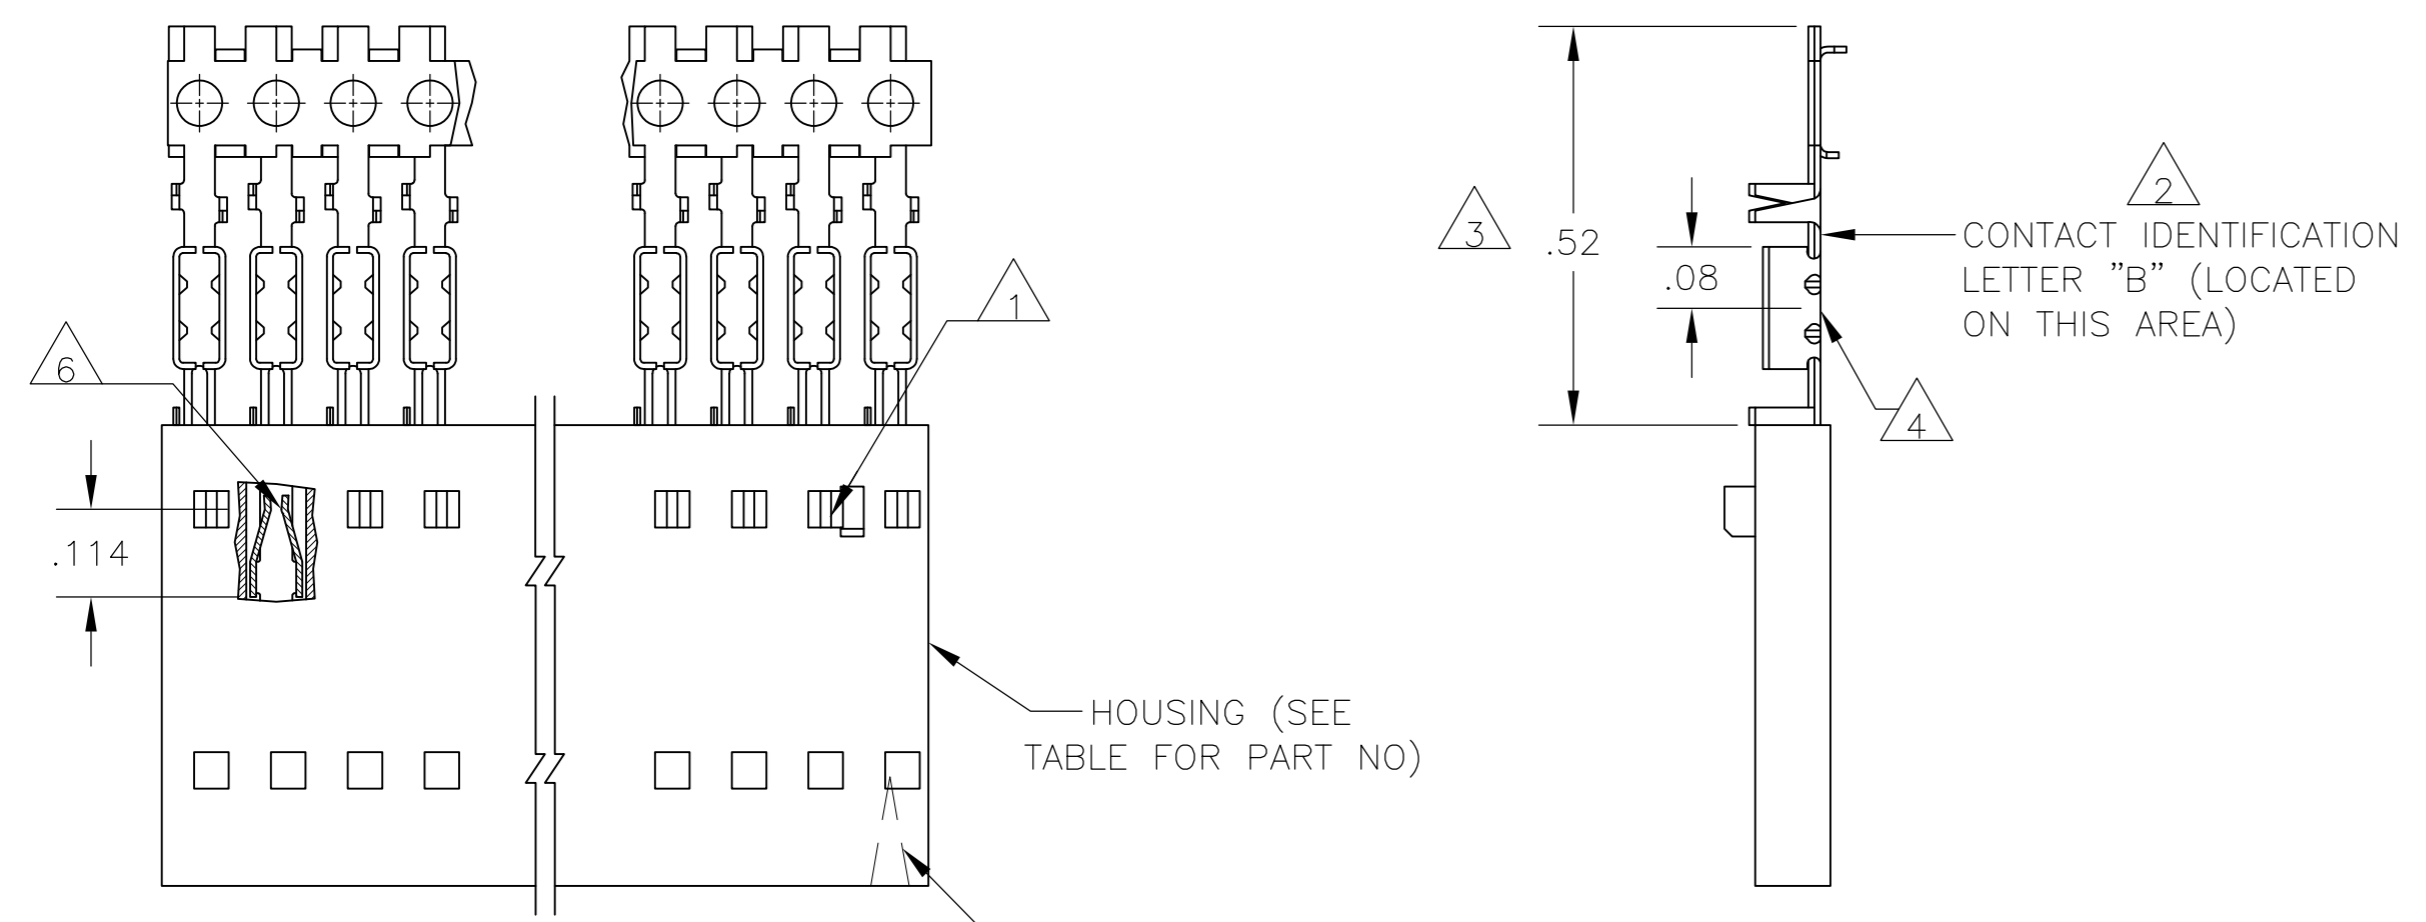

HOUSING (SEE TABLE FOR PART NO)

POSITION # 1 INDICATOR (FAR SIDE)



- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103970
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | |
|---|------------|----|------------|
| 8 | 2-103648-4 | 25 | 7-103900-4 |
| 8 | 2-103648-3 | 24 | 7-103900-3 |
| 8 | 2-103648-2 | 23 | 7-103900-2 |
| 8 | 2-103648-1 | 22 | 7-103900-1 |
| 8 | 2-103648-0 | 21 | 7-103900-0 |
| 8 | 1-103648-9 | 20 | 6-103900-9 |
| 8 | 1-103648-8 | 19 | 6-103900-8 |
| 8 | 1-103648-7 | 18 | 6-103900-7 |
| 8 | 1-103648-6 | 17 | 6-103900-6 |
| 8 | 1-103648-5 | 16 | 6-103900-5 |
| 8 | 1-103648-4 | 15 | 6-103900-4 |
| 8 | 1-103648-3 | 14 | 6-103900-3 |
| 8 | 1-103648-2 | 13 | 6-103900-2 |
| 7 | 2-103648-4 | 25 | 2-103900-4 |
| 7 | 2-103648-3 | 24 | 2-103900-3 |
| 7 | 2-103648-2 | 23 | 2-103900-2 |
| 7 | 2-103648-1 | 22 | 2-103900-1 |
| 7 | 2-103648-0 | 21 | 2-103900-0 |
| 7 | 1-103648-9 | 20 | 1-103900-9 |
| 7 | 1-103648-8 | 19 | 1-103900-8 |
| 7 | 1-103648-7 | 18 | 1-103900-7 |
| 7 | 1-103648-6 | 17 | 1-103900-6 |
| 7 | 1-103648-5 | 16 | 1-103900-5 |
| 7 | 1-103648-4 | 15 | 1-103900-4 |
| 7 | 1-103648-3 | 14 | 1-103900-3 |
| 7 | 1-103648-2 | 13 | 1-103900-2 |

| | | | | |
|---------------|------------|------------|----|------------|
| SUPERSEDED BY | 1-103970-1 | 1-103648-1 | 12 | 1-103900-1 |
| SUPERSEDED BY | 1-103970-0 | 1-103648-0 | 11 | 1-103900-0 |
| SUPERSEDED BY | 103970-9 | 103648-9 | 10 | 103900-9 |
| SUPERSEDED BY | 103970-8 | 103648-8 | 9 | 103900-8 |
| SUPERSEDED BY | 103970-7 | 103648-7 | 8 | 103900-7 |
| SUPERSEDED BY | 103970-6 | 103648-6 | 7 | 103900-6 |
| SUPERSEDED BY | 103970-5 | 103648-5 | 6 | 103900-5 |
| SUPERSEDED BY | 103970-4 | 103648-4 | 5 | 103900-4 |
| SUPERSEDED BY | 103970-3 | 103648-3 | 4 | 103900-3 |
| SUPERSEDED BY | 103970-2 | 103648-2 | 3 | 103900-2 |
| SUPERSEDED BY | 103970-1 | 103648-1 | 2 | 103900-1 |

| PLATING | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER |
|---------|---------------------|------------|----------------------|
|---------|---------------------|------------|----------------------|

| | | | | |
|--|--|----------------------------|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN L. MAYER 05 NOV 1986 | Tyco Electronics Corporation Harrisburg, Pa 17105-3608 | |
| DIMENSIONS: INCHES | | CHK P. DEJONG 12-11-86 | NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD 12-11-86 | PRODUCT SPEC 108-25034 | |
| 0 PLC ± - | | APPLICATION SPEC 114-25026 | | |
| 1 PLC ± - | | SIZE A2 | | |
| 2 PLC ± .02 | | CAGE CODE 00779 | | |
| 3 PLC ± .005 | | DRAWING NO C=103900 | | |
| 4 PLC ± - | | RESTRICTED TO - | | |
| ANGLES ± - | | SCALE 4:1 | | |
| FINISH SEE TABLE | | SHEET 1 OF 1 | | |
| MATERIALS: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK | | REV M1 | | |
| CONTACTS- PHOS BRONZE | | CUSTOMER DRAWING | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)