
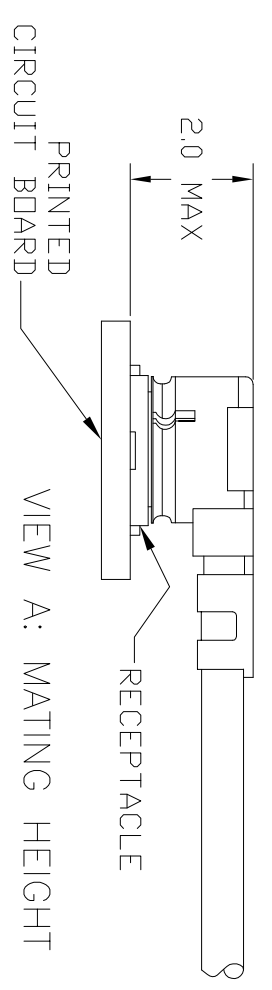


Loc	HT	DIST	OO	P	LTR	0	REVISIONS	DATE	DWN	APVD
							DESCRIPTION	29APR05	HXF	DF

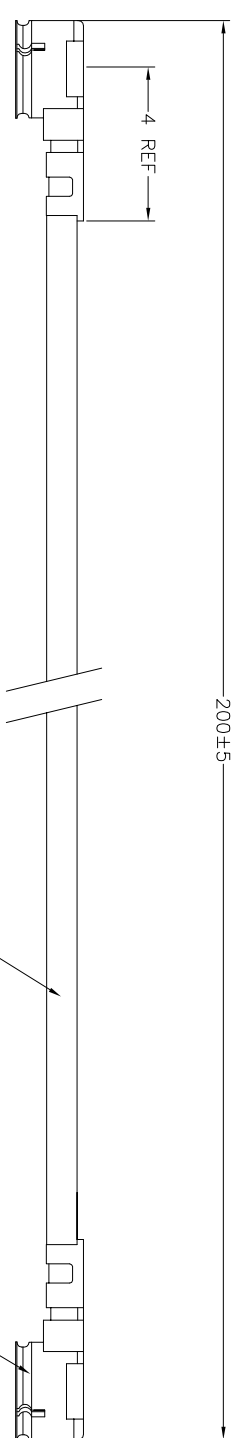

- NOTES:
1. HIROSE COMPATIBLE, 2.0MM MATING HEIGHT.
 2. 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms
FREQUENCY RANGE: DC TO 6 GHz
VSWR 1.4:1 MAX
 3. PRODUCT RATINGS:
TEMPERATURE: -40 TO +90 DEG.C
VOLTAGE: 60 VAC
CHARACTERISTIC IMPEDANCE: 50 OHMS
MATING DURABILITY: 30 CYCLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	MM
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLG	±
1 PLG	±
2 PLG	±
3 PLG	±
4 PLG	±
ANGLES	±
FINISH	-

DWN	Hao Xiangfeng	29APR05
CHK	Fouli Zhou	29APR05
APVD	DENVER WILLSON	27MAR05
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		

AR	MM	MINIATURE COAXIAL CABLE, 0.80mm OD	2
2	PC	UMCC TYPE II PLUG	1
QTY UNIT		DESCRIPTION	ITEM

SIZE	A4	CAGE CODE	00779	DRAWING NO	1750108-2	RESTRICTED TO	-
SCALE	1:1	SHEET	1	OF	1	REV	0

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)