


## SPECIFICATION CONTROL DRAWING

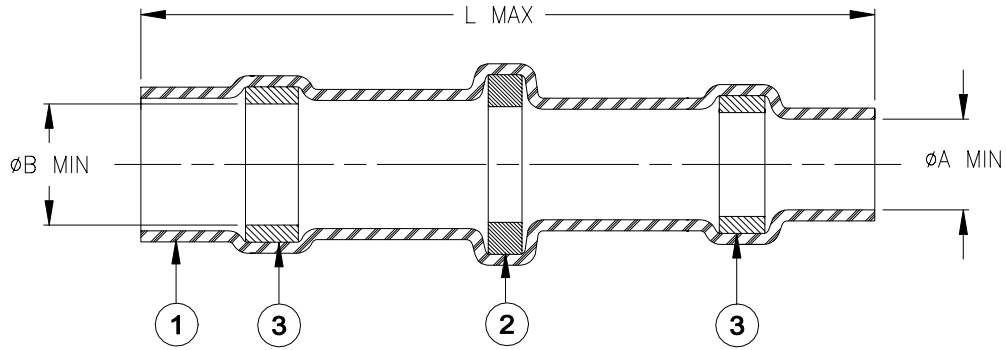

Product Revision		Product Dimensions			Cable Dimensions						Qty: Item 2
Product Name		L max	øA min	øB min	D max	øE min	øF min	øG max	H±0.5 (H±0.020)	J±0.5 (J±0.020)	
B-155-03-S	A	18.5 (0.728)	2.5 (0.098)	3.0 (0.118)	3.0 (0.118)	1.5 (0.059)	1.0 (0.039)	2.5 (0.098)	6.0 (0.236)	7.0 (0.275)	1
B-155-05-S	A	18.5 (0.728)	4.3 (0.169)	4.8 (0.189)	4.8 (0.189)	2.0 (0.078)	1.5 (0.059)	4.3 (0.169)	6.0 (0.236)	7.0 (0.275)	1
B-155-07-S	A	21.0 (0.827)	6.8 (0.267)	7.3 (0.287)	7.3 (0.287)	3.3 (0.130)	2.8 (0.110)	6.8 (0.267)	8.0 (0.315)	9.0 (0.354)	1
B-155-09-S	A	28.5 (1.102)	8.7 (0.343)	9.2 (0.362)	9.2 (0.362)	4.5 (0.177)	4.0 (0.157)	8.7 (0.343)	8.0 (0.315)	9.0 (0.354)	2
B-155-11-S	A	28.5 (1.122)	10.8 (0.425)	11.5 (0.452)	11.5 (0.452)	4.5 (0.177)	4.0 (0.157)	10.8 (0.425)	8.0 (0.315)	9.0 (0.354)	2


### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX: Qty: see table (one solder washer shown).  
 SOLDER: TYPE Sn42Bi58 per ANSI / J-STD-006.  
 FLUX: TYPE ROM1 per ANSI / J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic.

### APPLICATION

- These controlled soldering devices are designed for termination of a bare or tin plated copper shield on a cable having an insulation rated for at least +85°C.
- Temperature range: -55°C to +125°C.
- Parts will meet the requirements of Tyco Electronics Specification RT-1404 when installed properly.
- For installation procedure and application equipment, consult RPIP-688-00.

For best results, prepare the cable as shown:

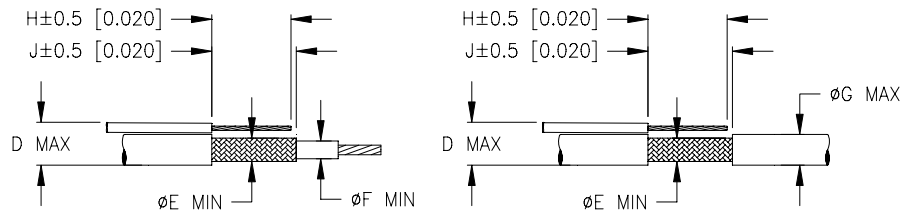

		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.				TITLE: <b>SOLDERSLEEVE DEVICE,                  LOW FIRE HAZARD SHIELD                  TERMINATION, LOW TEMPERATURE</b>						
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: <b>B-155-XX-S</b>						
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: SEE TABLE		DOC. ISSUE: 1		DATE: 6-Jul-05		
PREPARED BY: mforonda		DCR NUMBER: D050239		REPLACES: ---		CAGE CODE : 06090		SCALE: ---		SIZE: A		SHEET: 1 of 1

© 2005 Tyco Electronics Corporation. All rights reserved.  
 If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)