
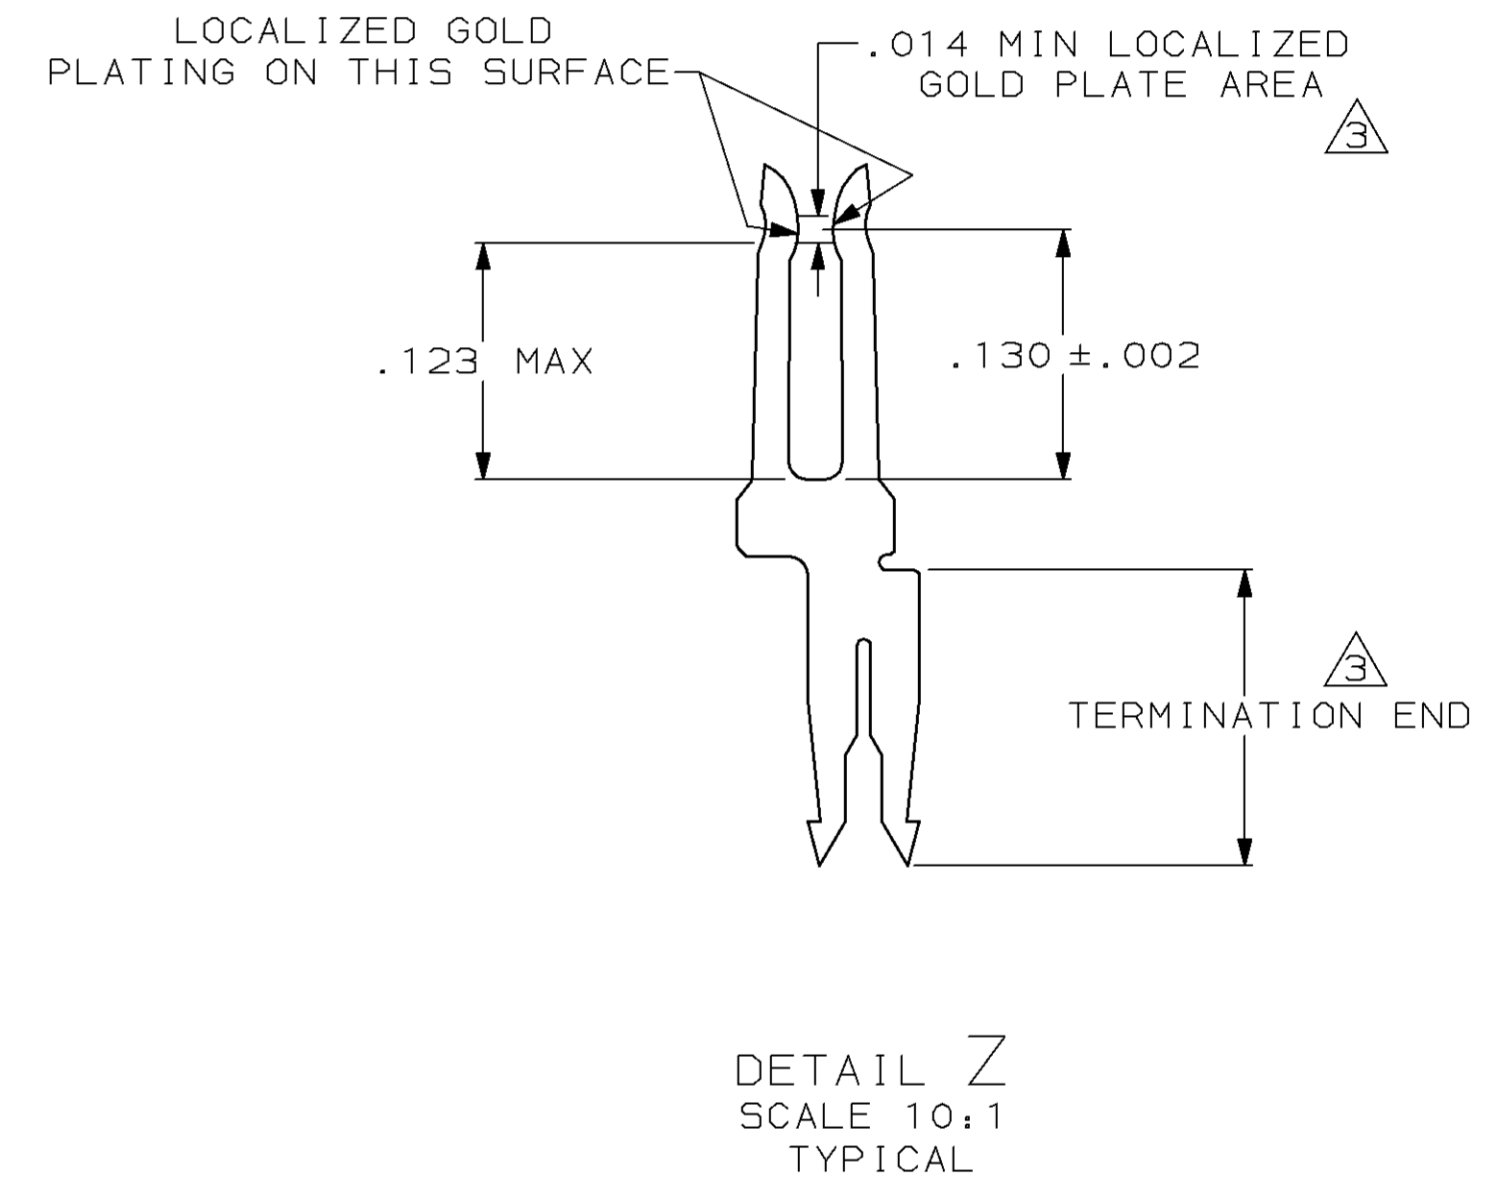
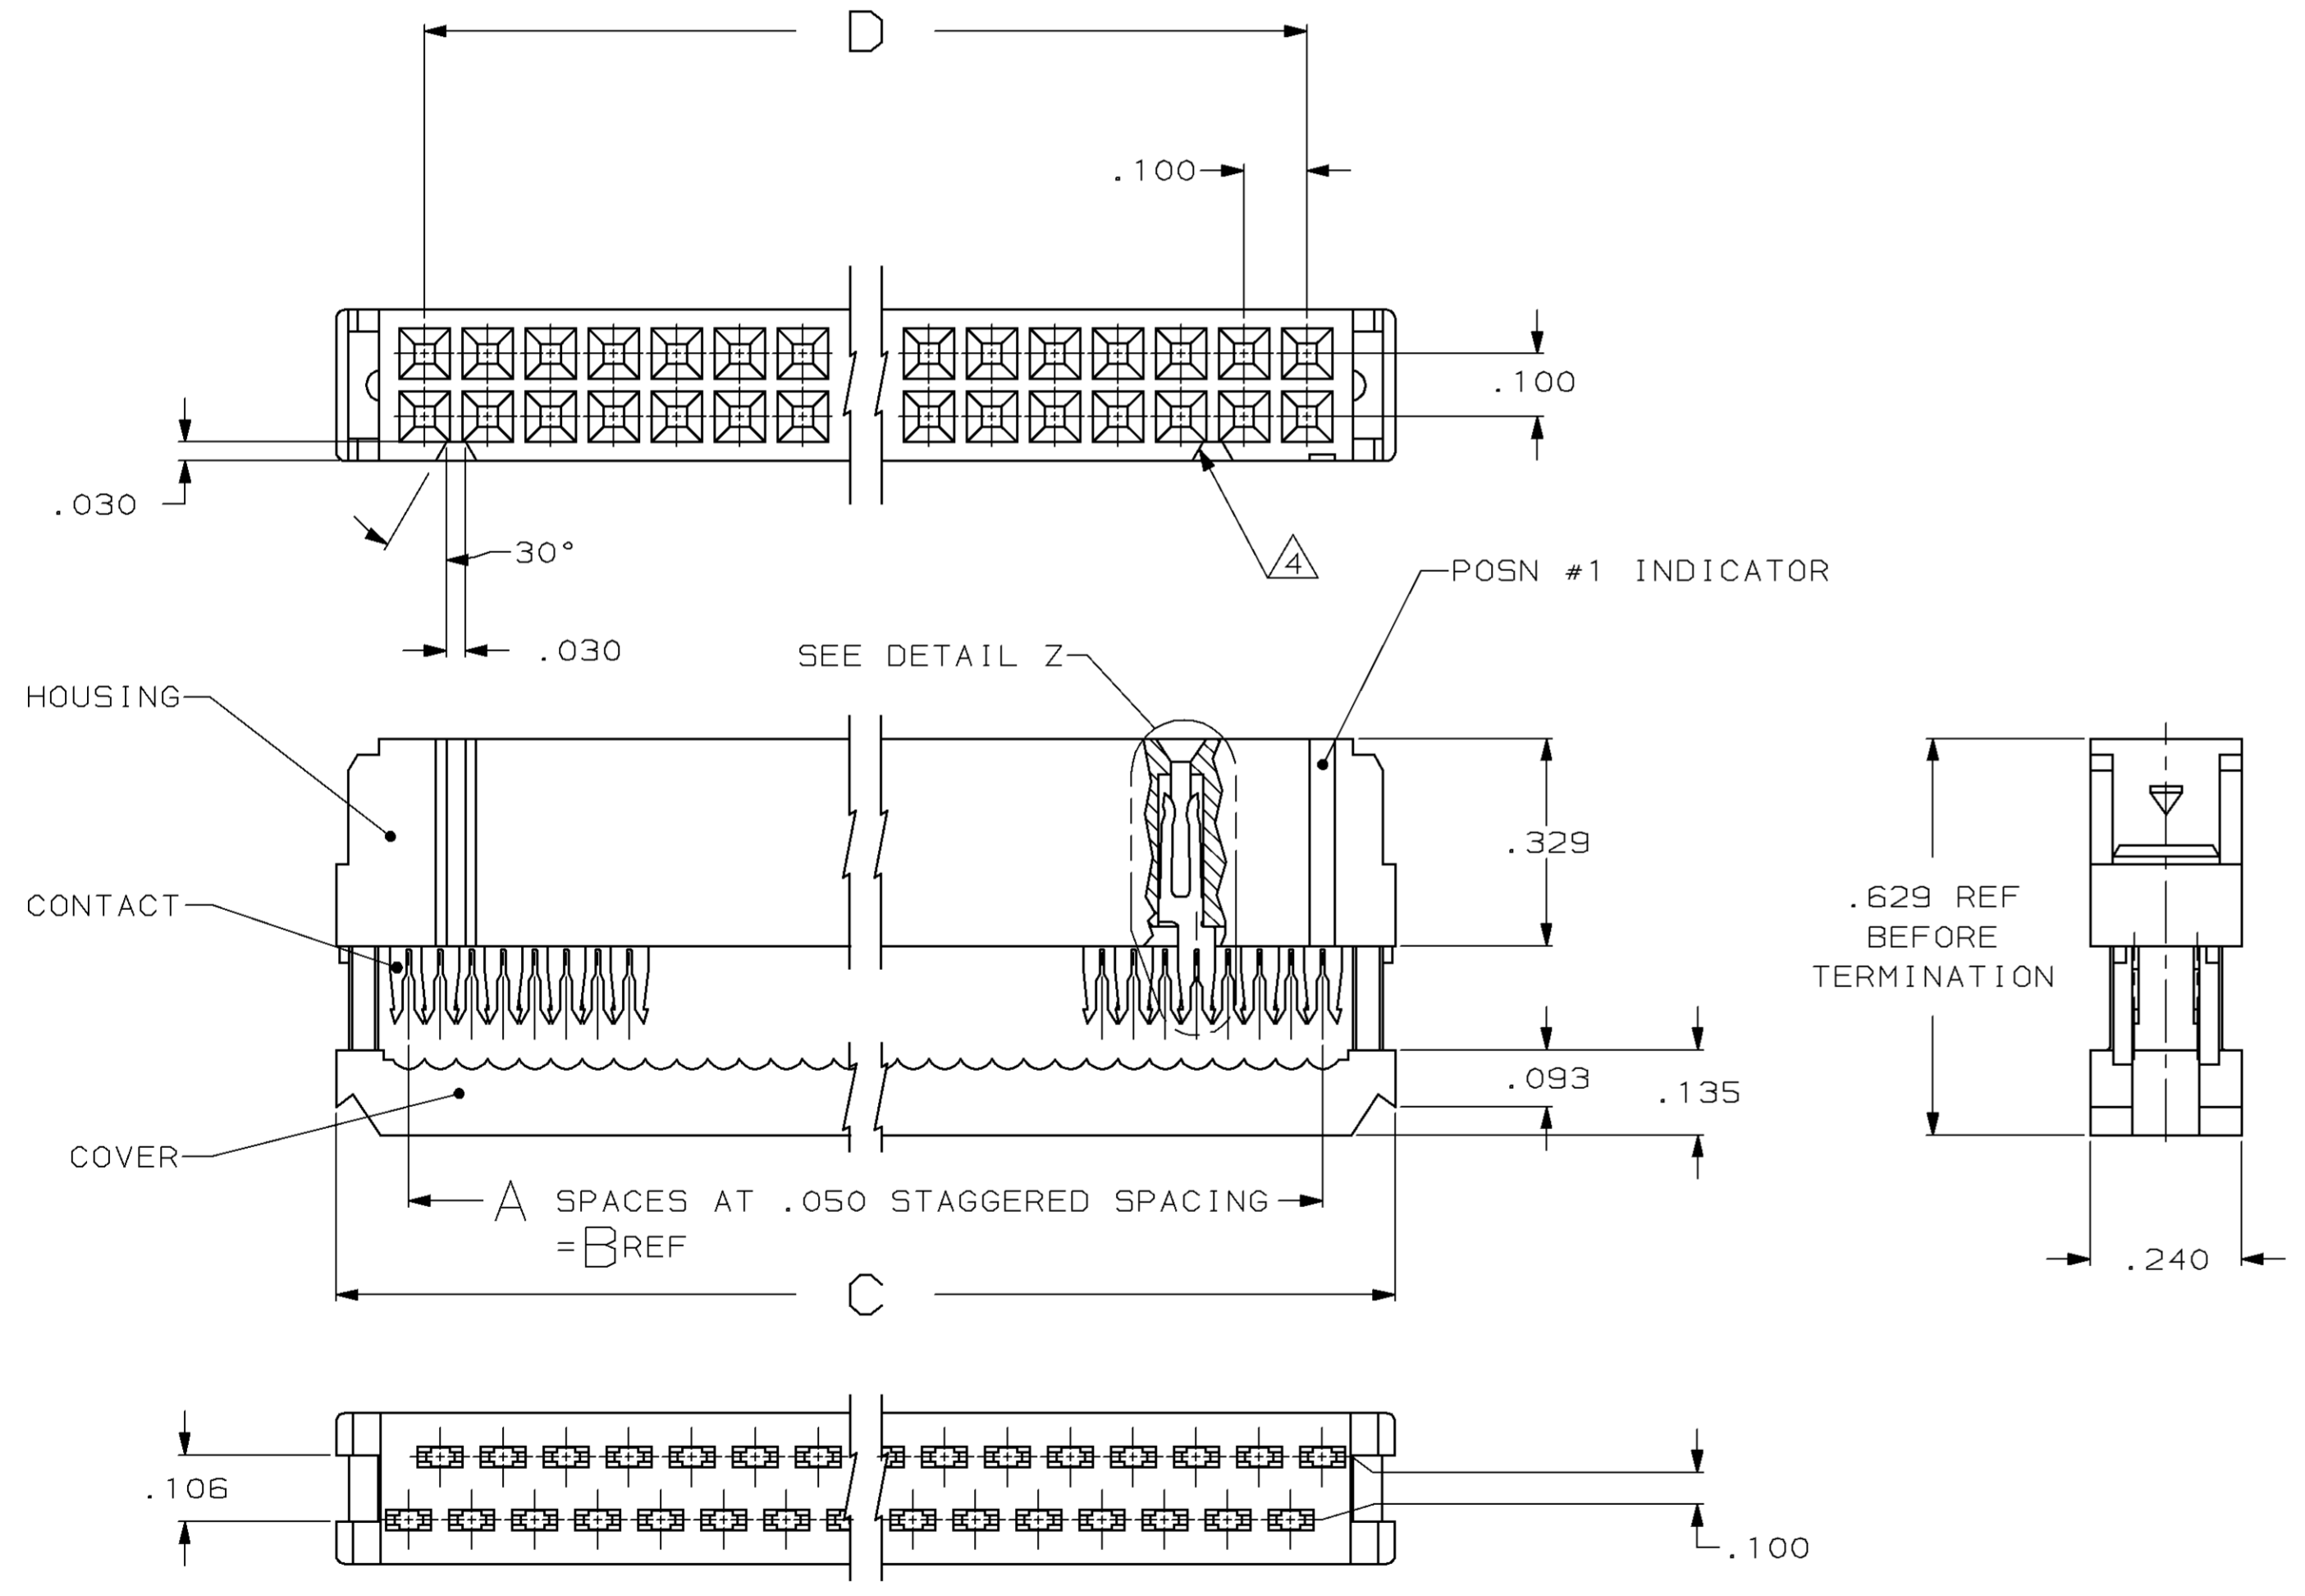


LOC AR		DIST 35		REVISONS		DATE	APPD
P	F	ZONE	LTR	DESCRIPTION			
		A		REV, REDWN PER ECN 0899	-	-	
		B		REV PER ECN 1456	-	-	
		C		REVSD/ECN CF-1706	07/88	DH	
		D		REV ECN CF1770	DK	11-8-88	MC
		E		REV PER ECN CF1807	JPG	5-5-89	SG
		F		REV PER ECN BD4386		12-6-90	-
		G		REV PER EC 0020-1041-93		12/03/93	JS
		H		OBS 1--4 PER EC 0020-933-93		03/16/94	DK
		J		OBSOLETE -13			
				PER EC 0410-197-96		21 AUG 97	JGH

- ① UL RATED 94V-0 THERMOPLASTIC, COLOR: BLACK.
- ② PHOSPHOR BRONZE PER QQ-B-750.
- ③ PLATED WITH .000030 GOLD ON LOCALIZED GOLD PLATE AREA, .000100 - .000200 BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- ④ POLARIZING FEATURE DOES NOT EXIST ON SAME END AS THE POSN #1 INDICATOR ON 10 AND 14 POSN PRODUCT.

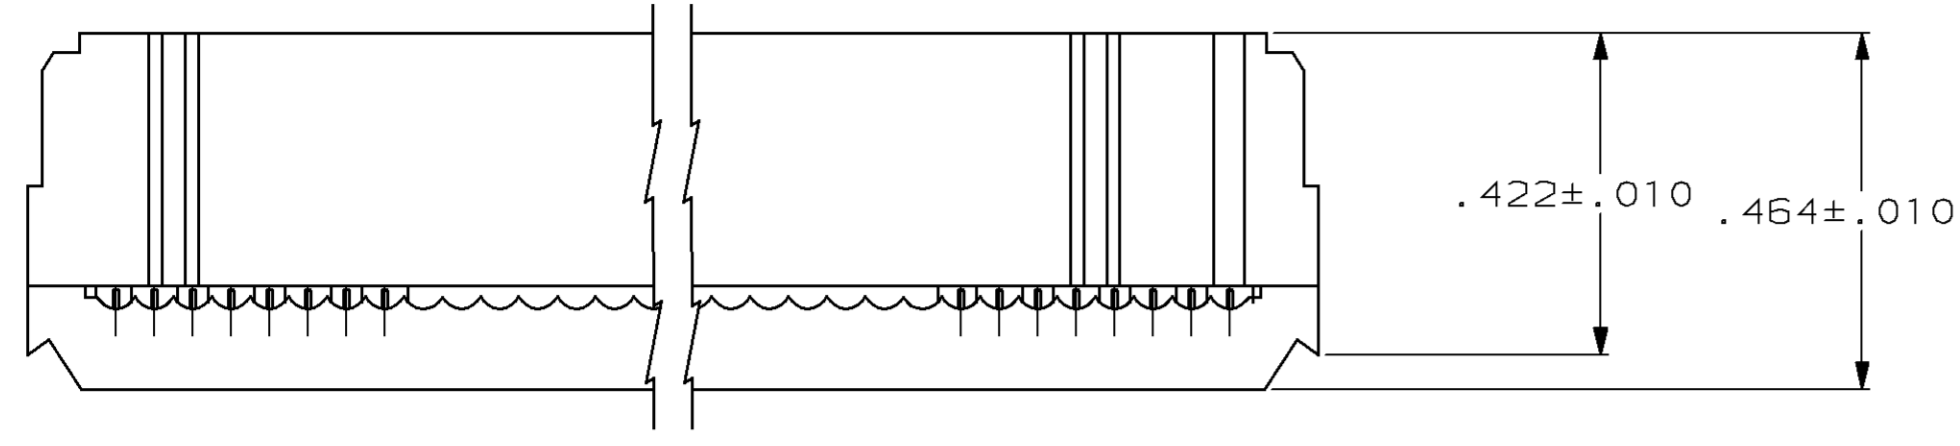

OBSOLETE	1.700	1.980	1.750	35	36	1-746290-4			
OBSOLETE	2.100	2.380	2.150	43	44	1-746290-3			
	3.100	3.380	3.150	63	64	1- -2			
	2.900	3.180	2.950	59	60	1- -1			
	2.400	2.680	2.450	49	50	1- -0			
	1.900	2.180	1.950	39	40	-9			
	1.600	1.880	1.650	33	34	-8			
	1.400	1.680	1.450	29	30	-7			
	1.200	1.480	1.250	25	26	-6			
	1.100	1.380	1.150	23	24	-5			
	.900	1.180	.950	19	20	-4			
	.700	.980	.750	15	16	-3			
	.600	.880	.650	13	14	-2			
	.400	.680	.450	9	10	746290-1			
				D	C	B	A	NO OF POSN	PART NUMBER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:		DR J. PEACHEY 2-19-86	AMP INCORPORATED Harrisburg, Pa. 17105	
2 PL DEC ± .005		CHK JAY SAUDER 2-21-86		
3 PL DEC ± .005		APPD JAY SAUDER 2-21-86	NAME RECEPTACLE KIT, AMP-LATCH NOVO,	
ANGLES ± 5°		APPD D. HOFFMAN 2-21-86	MIL PLZN, 30 GOLD DUPLEX	
MATERIAL	CONTACTS: ②	PRODUCT SPEC 108-40000	CONTACTS, W/O STRAIN RLF	
MOLDED PARTS:	CONTACTS: ③	APPLICATION SPEC 114-40005	SIZE D	FSCM NO 00779
FINISH		WEIGHT -	DRAWING NO 746290	
			SCALE 4:1	SHEET 1 of 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)