
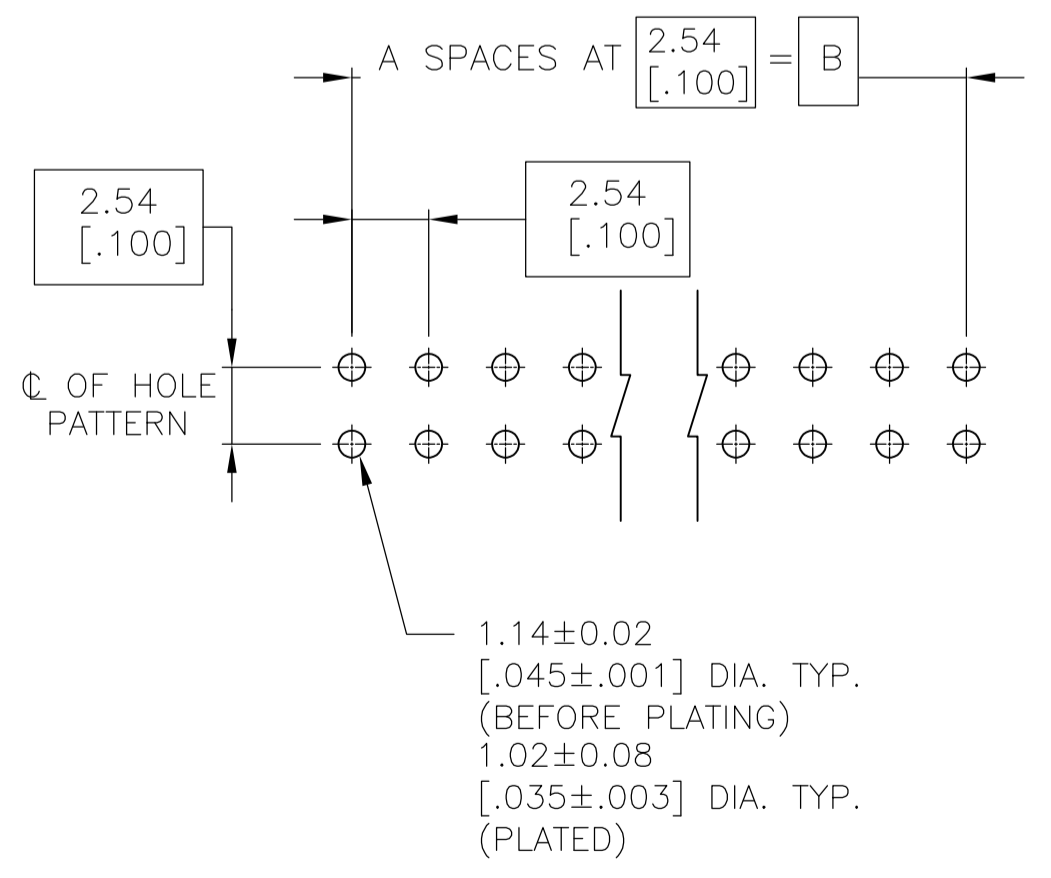


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 5 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION

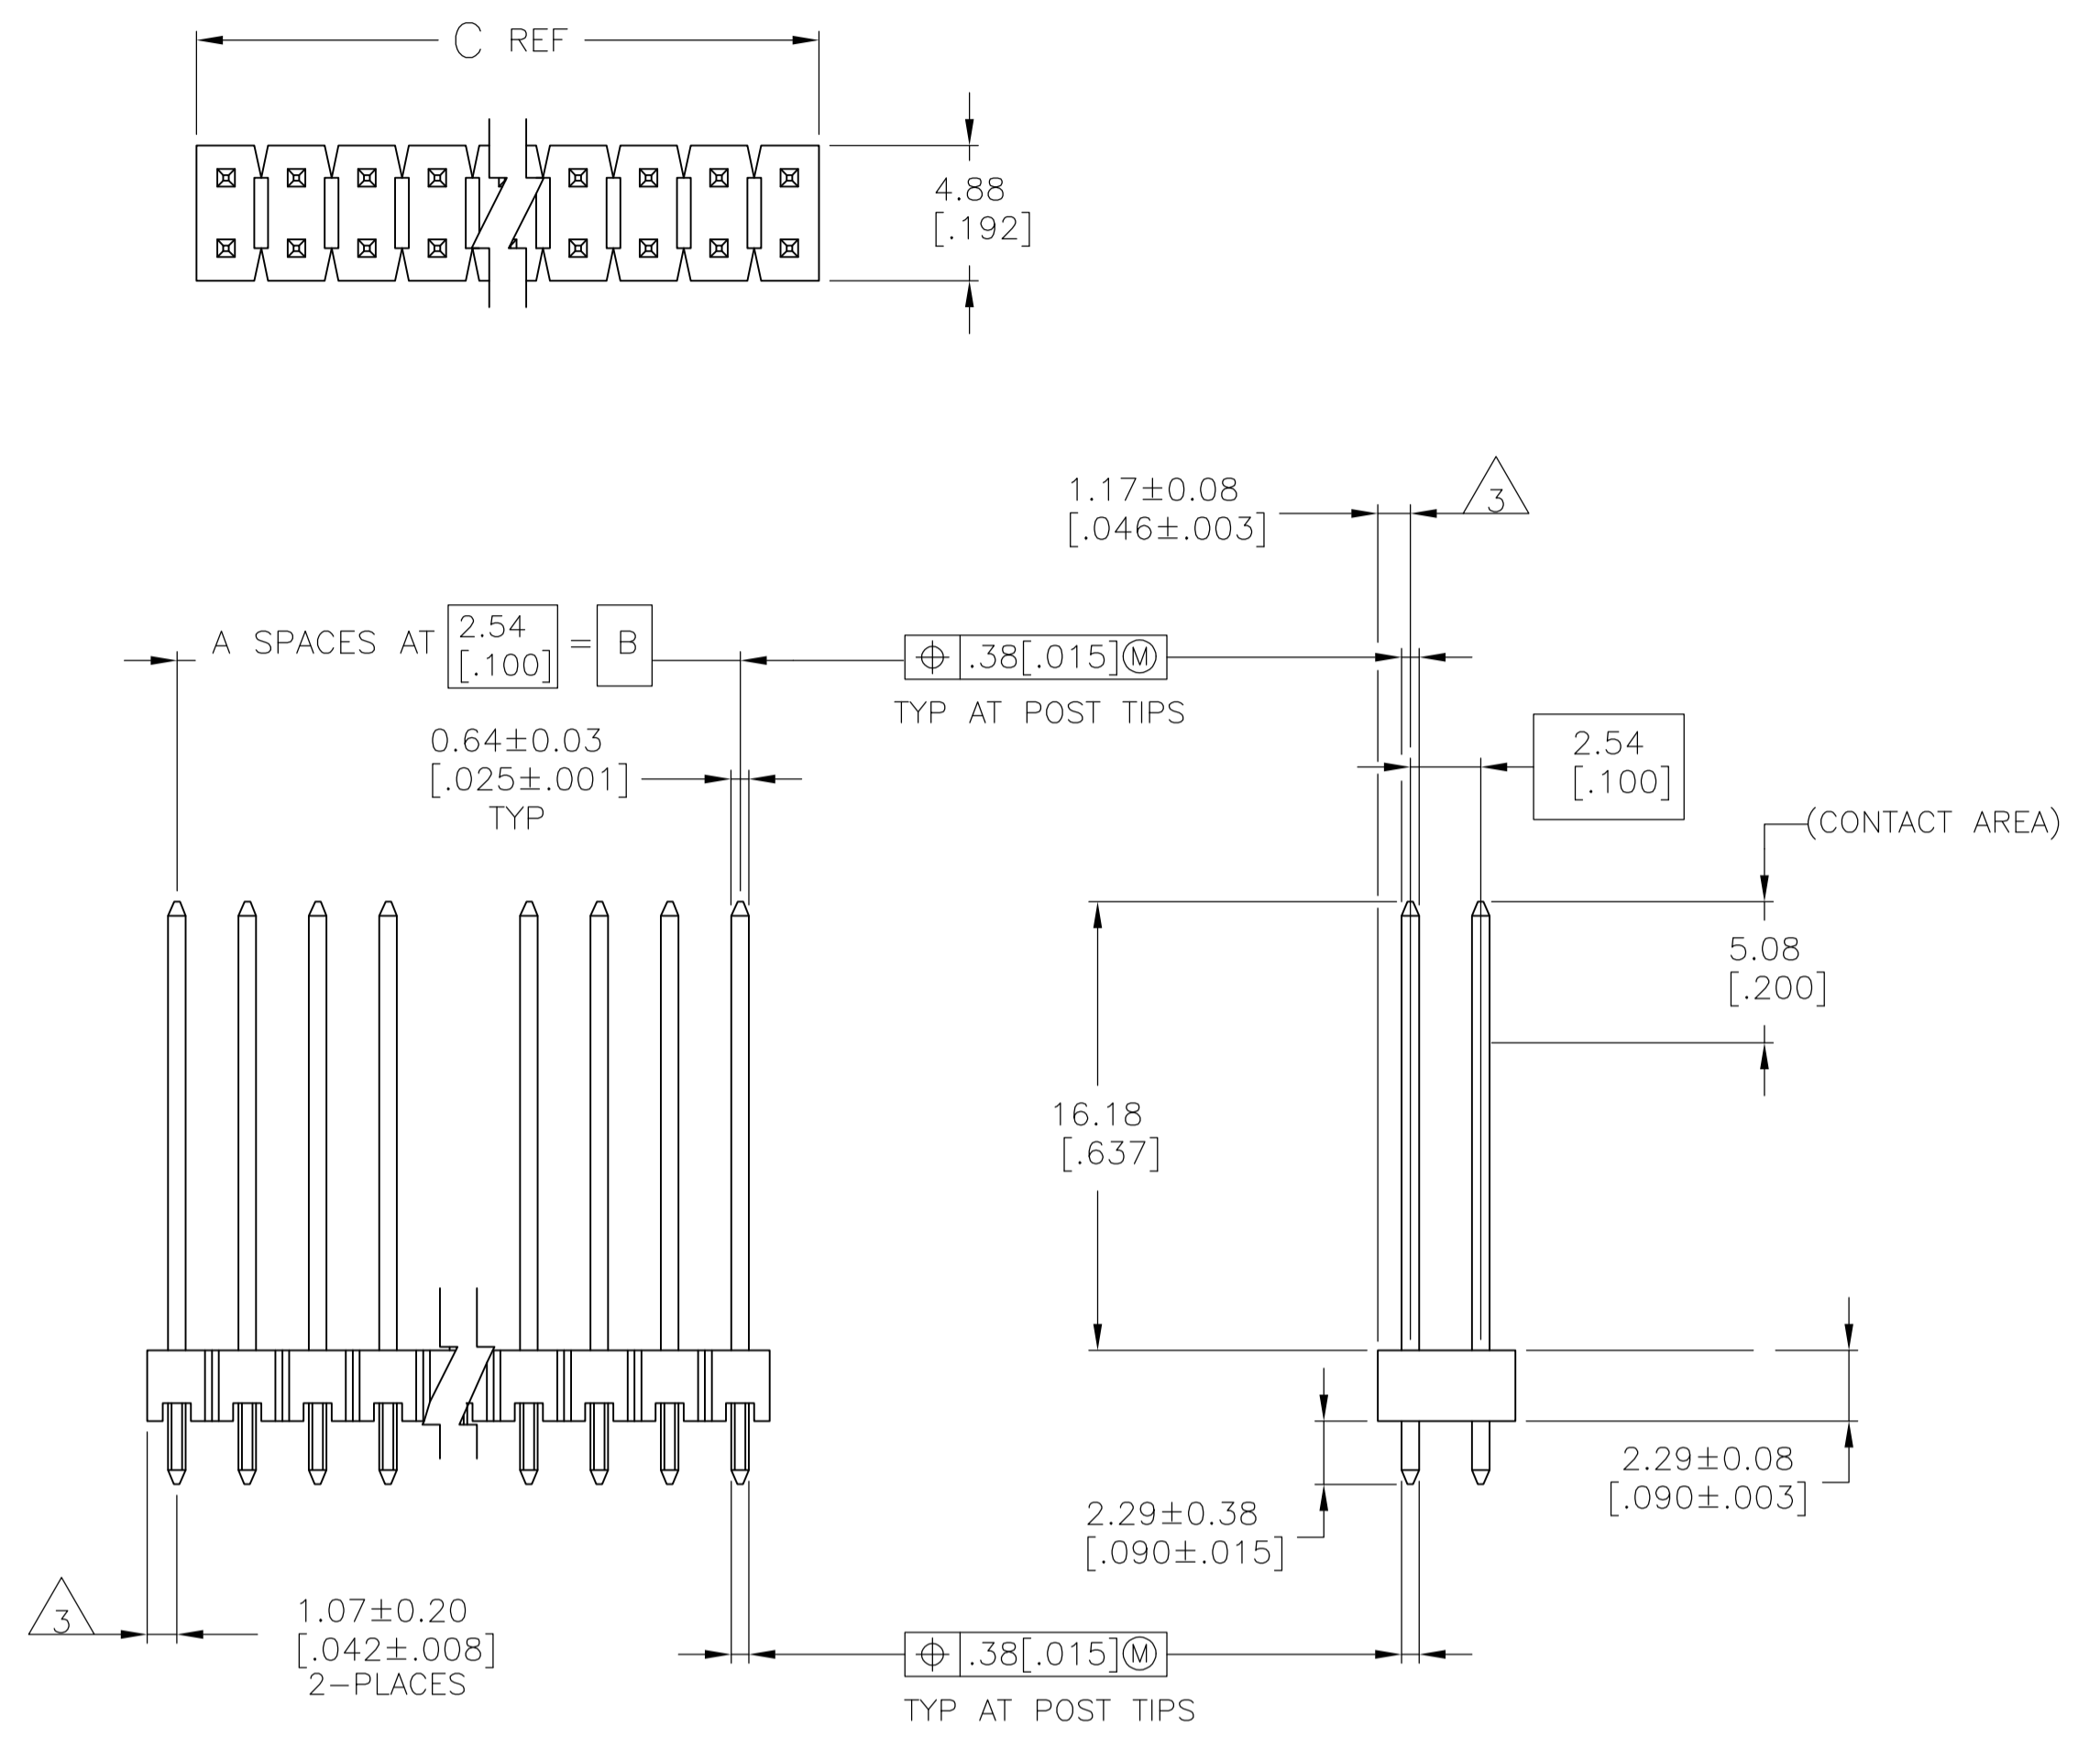

RECOMMENDED HOLE LAYOUT

6	5	101.19 [3.984]	99.06 [3.900]	39	80	5-146433-1
	4	101.19 [3.984]	99.06 [3.900]	39	80	146433-1
REMARKS	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN T. HOFFMAN 07-09-95	APVD G. DUBNICZKI 02-10-95	NAME
0 PL ± -	1 PL ± -	2 PL ± 0.51[.02]	3 PL ± 0.127[.005]	4 PL ± 0.0127[.0005]
ANGLES	± -	APPLIC. SPEC	SIZE	CAGE CODE
MATERIAL	FINISH	WEIGHT	A1	00779
POST: COPPER ALLOY	SEE TABLE	CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1

STE TE Connectivity
 HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, VERTICAL, .025 SQ. POSTS
 DRAWING NO. 146433

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)