
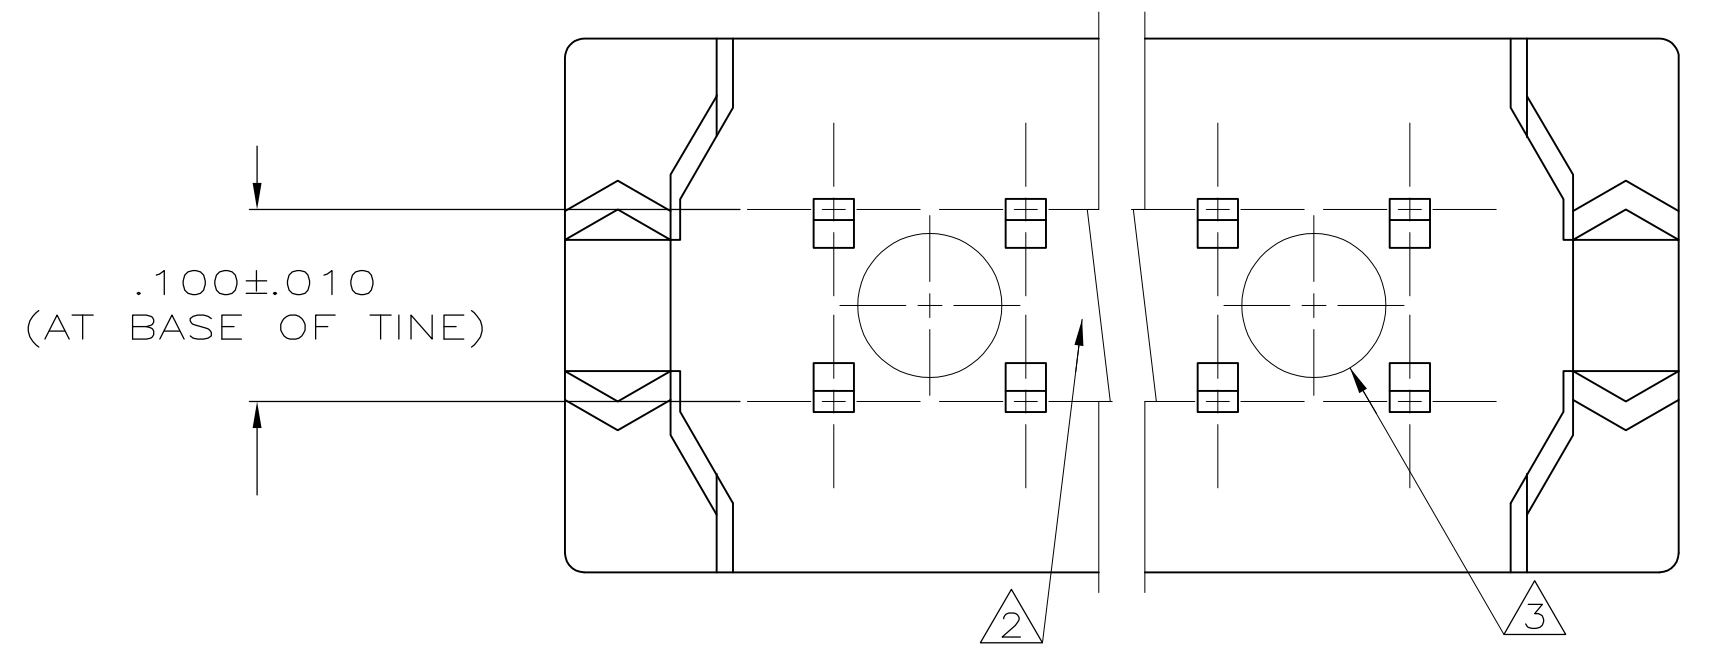


- ④ CONTACTS DESIGNED FOR 26 & 28 AWG STRANDED OR 26, 28 & 30 AWG SOLID WIRE.
- ⑤ AMP TRADEMARK LOCATED IN APPROX AREA SHOWN.
- ③ STANDOFFS: POS 10 (2) STANDOFFS AS SHOWN.  
 14-16 (3) STANDOFFS, (1) CENTERED BETWEEN (2) SHOWN  
 20-26 (4) (2)  
 30 (5) (3)  
 34 (6) (4)  
 40-44 (7) (5)  
 50 (8) (6)  
 60 (9) (7)  
 64 (10) (8)
- ④ .000100-.000200 BRIGHT TIN-LEAD, ALL OVER .000050 NICKEL.
- ⑤ HEIGHT AFTER TERMINATION IS .253 ±.010.
- 6. FOR USE IN .062 - .093" THICK PCB.
- ⑦ .000005 MIN GOLD ON RIBBON CABLE TERMINATION AREA, .000100-.000200 MATTE TIN ON SOLDER TAILS, ALL OVER .000050 MIN NICKEL.
- ⑧ MOLDED PARTS, 94V-0 RATED THERMOPLASTIC, COLOR: BLACK  
 CONTACTS: PHOS BRONZE.

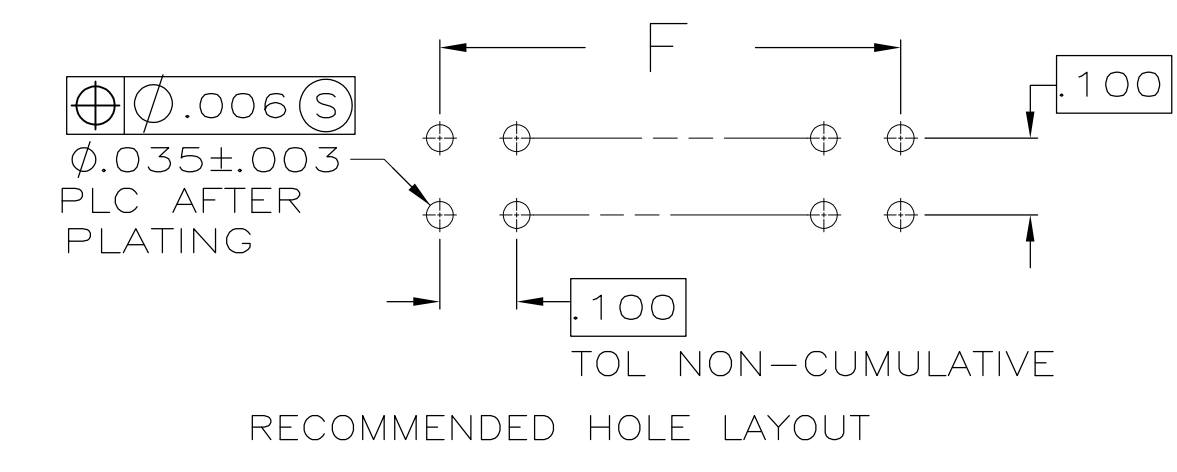

|          |    |       |       |    |    |            |            |
|----------|----|-------|-------|----|----|------------|------------|
| ⑦        | 24 | 2.680 | 48    | 49 | 50 | 2-111382-0 |            |
| ⑦        | 16 | 1.880 | 32    | 33 | 34 | 1-111382-9 |            |
| ⑦        | 12 | 1.480 | 24    | 25 | 26 | 1-111382-8 |            |
| ⑦        | 9  | 1.180 | 18    | 19 | 20 | 1-111382-7 |            |
| ⑦        | 7  | 0.980 | 14    | 15 | 16 | 1-111382-6 |            |
| ⑦        | 4  | .680  | 8     | 9  | 10 | 1-111382-4 |            |
| OBSOLETE | ④  | 21    | 2.380 | 42 | 43 | 44         | 1-111382-3 |
| OBSOLETE | ④  | 31    | 3.380 | 62 | 63 | 64         | 1-111382-2 |
| OBSOLETE | ④  | 29    | 3.180 | 58 | 59 | 60         | 1-111382-1 |
| OBSOLETE | ④  | 24    | 2.680 | 48 | 49 | 50         | 1-111382-0 |
| OBSOLETE | ④  | 19    | 2.180 | 38 | 39 | 40         | 111382-9   |
| OBSOLETE | ④  | 16    | 1.880 | 32 | 33 | 34         | 111382-8   |
| OBSOLETE | ④  | 14    | 1.680 | 28 | 29 | 30         | 111382-7   |
| OBSOLETE | ④  | 12    | 1.480 | 24 | 25 | 26         | 111382-6   |
| OBSOLETE | ④  | 11    | 1.380 | 22 | 23 | 24         | 111382-5   |
| OBSOLETE | ④  | 9     | 1.180 | 18 | 19 | 20         | 111382-4   |
| OBSOLETE | ④  | 7     | .980  | 14 | 15 | 16         | 111382-3   |
| OBSOLETE | ④  | 6     | .880  | 12 | 13 | 14         | 111382-2   |
| OBSOLETE | ④  | 4     | .680  | 8  | 9  | 10         | 111382-1   |

THIS DRAWING IS A CONTROLLED DOCUMENT.

|                    |  |           |           |           |              |           |            |
|--------------------|--|-----------|-----------|-----------|--------------|-----------|------------|
| DIMENSIONS: INCHES | TOLERANCES UNLESS OTHERWISE SPECIFIED: | 0 PLC ± - | 1 PLC ± - | 2 PLC ± - | 3 PLC ± .005 | 4 PLC ± - | ANGLES ± - |
|--------------------|--|-----------|-----------|-----------|--------------|-----------|------------|

MATERIAL: ⑧ FINISH: CONTACTS: SEE TABLE

|                  |  |            |
|------------------|--|------------|
| DIN              | L VARELA - DOCKS   | 11-29-04   |
| CHK              | C. ROHDE   | 11-29-04   |
| APVD             | M. WALMSLEY  | 11-29-04   |
| NAME             | KIT, DIP PLUG, PREASSEMBLED, .100 X .100 CENTERLINE, AMP-LATCH |            |
| PRODUCT SPEC     | 108-40013  |            |
| APPLICATION SPEC | 114-40005  |            |
| SIZE             | CAGE CODE  | DRAWING NO |
| A1               | 00779  | 111382     |

CUSTOMER DRAWING SCALE 10:1 SHEET 1 OF 1 REV L

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)