

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - TE Connectivity, SWINDON, UK


ALL RIGHTS RESERVED.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------------|-----------|-----|------|
| | 3 | PAPER CHANGE REF. ECR-18-018446 | 20DEC2018 | AFK | LS |

COMMERCIALLY CONFIDENTIAL
RESTRICTED CIRCULATION


DIRECTION OF FEED
INTO PRINTER

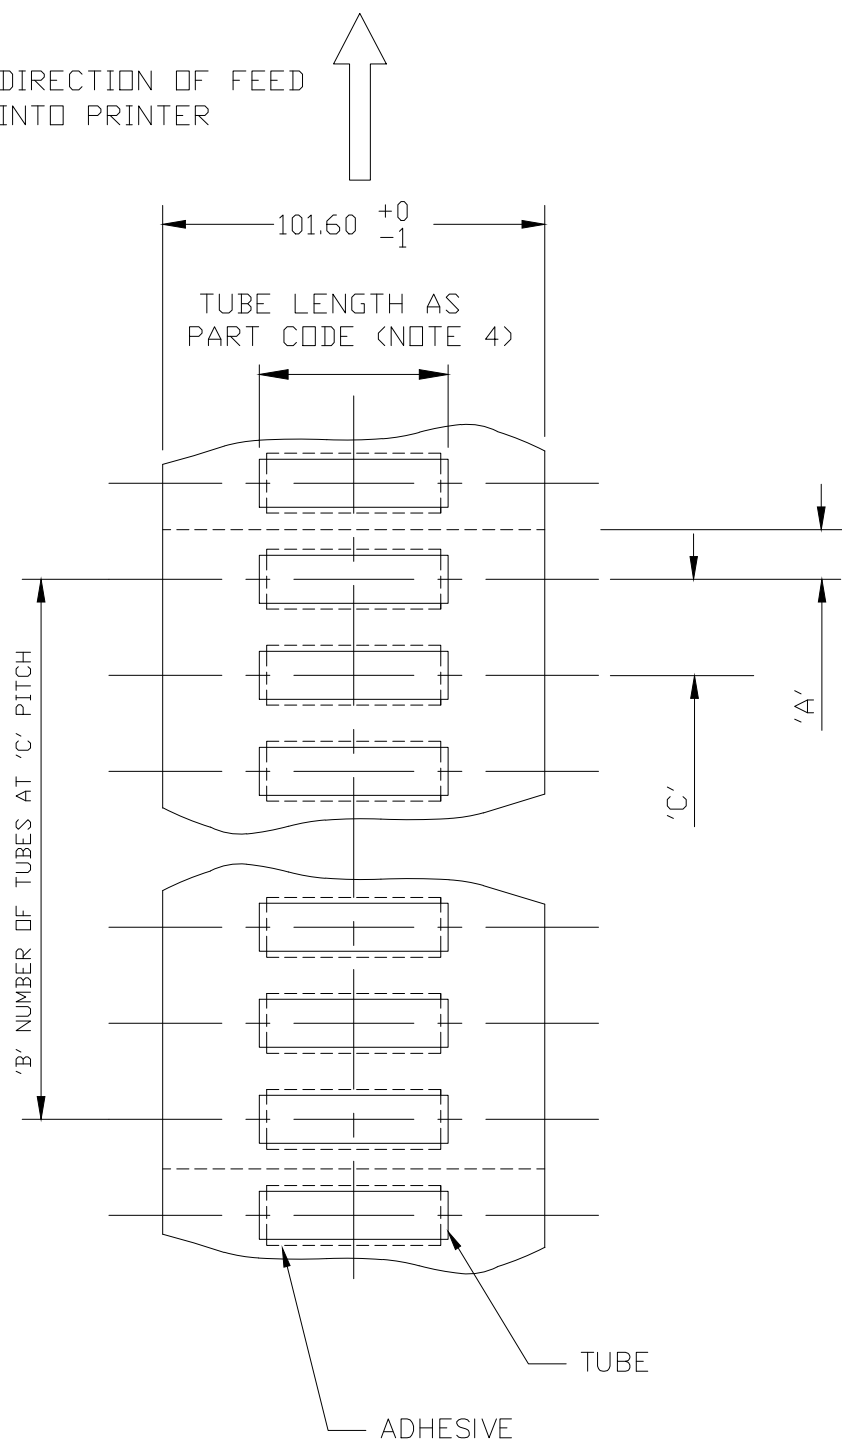

| PART CODE (1st FIVE DIGITS) | 'A' TOP EDGE OF PAPER TO CENTRE OF TUBE | 'B' No. OF TUBES AT 'C' PITCH PER PAGE | 'C' TUBE POSITION PITCH |
|--------------------------------|--|--|-------------------------------|
| HS024 | 6.40 | 20 | 12.7 |
| HS032 | 6.40 | 20 | 12.7 |
| HS048 | 6.40 | 20 | 12.7 |
| HS064 | 8.46 | 15 | 16.93 |
| HS095 | 12.7 | 10 | 25.4 |
| HS127 | 12.7 | 10 | 25.4 |
| HS190 | 25.4 | 5 | 50.8 |
| HS254 | 25.4 | 5 | 50.8 |
| HS381 | 63.5 | 2 | 127 |

NOTES:-

- TOLERANCE ON 'C' - ALL SIZES ±0.5mm.
- EDGES OF TUBE TO BE STRAIGHT/SQUARE TO PAPER EDGE WITHIN 1.0mm TOLERANCE ZONE. SEE DIAGRAM BELOW.
- NO ACCUMULATIVE PITCH ERROR THROUGH PACK IS ACCEPTABLE.
- TUBE LENGTH CUT TOLERANCE:- $\pm \frac{1}{0}$ mm.

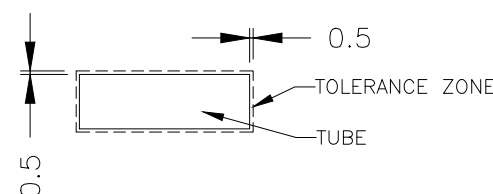

| | | | | | |
|--|--|---|-----------|--|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN AFK CHK | 27NOV2012 | TE Connectivity HSI THERMAL TRANSFER NARROW ASSEMBLY 2:1 PRE TAPED CARRIER | |
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | | |
| | | 0 PLC ± - | | PRODUCT SPEC | |
| | | 1 PLC ± 0.5 | | APPLICATION SPEC | |
| MATERIAL IRRADIATED POLYOLEFIN TUBE | | FINISH | | WEIGHT | RESTRICTED TO |
| | | | | 0.000000 | |
| | | | | A3 | |
| | | | | 0198G | |
| | | | | C= | |
| | | | | 1905A0019 | |
| | | | | SCALE | SHEET |
| | | | | --- | 1 OF 1 |
| | | | | REV | 3 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)