
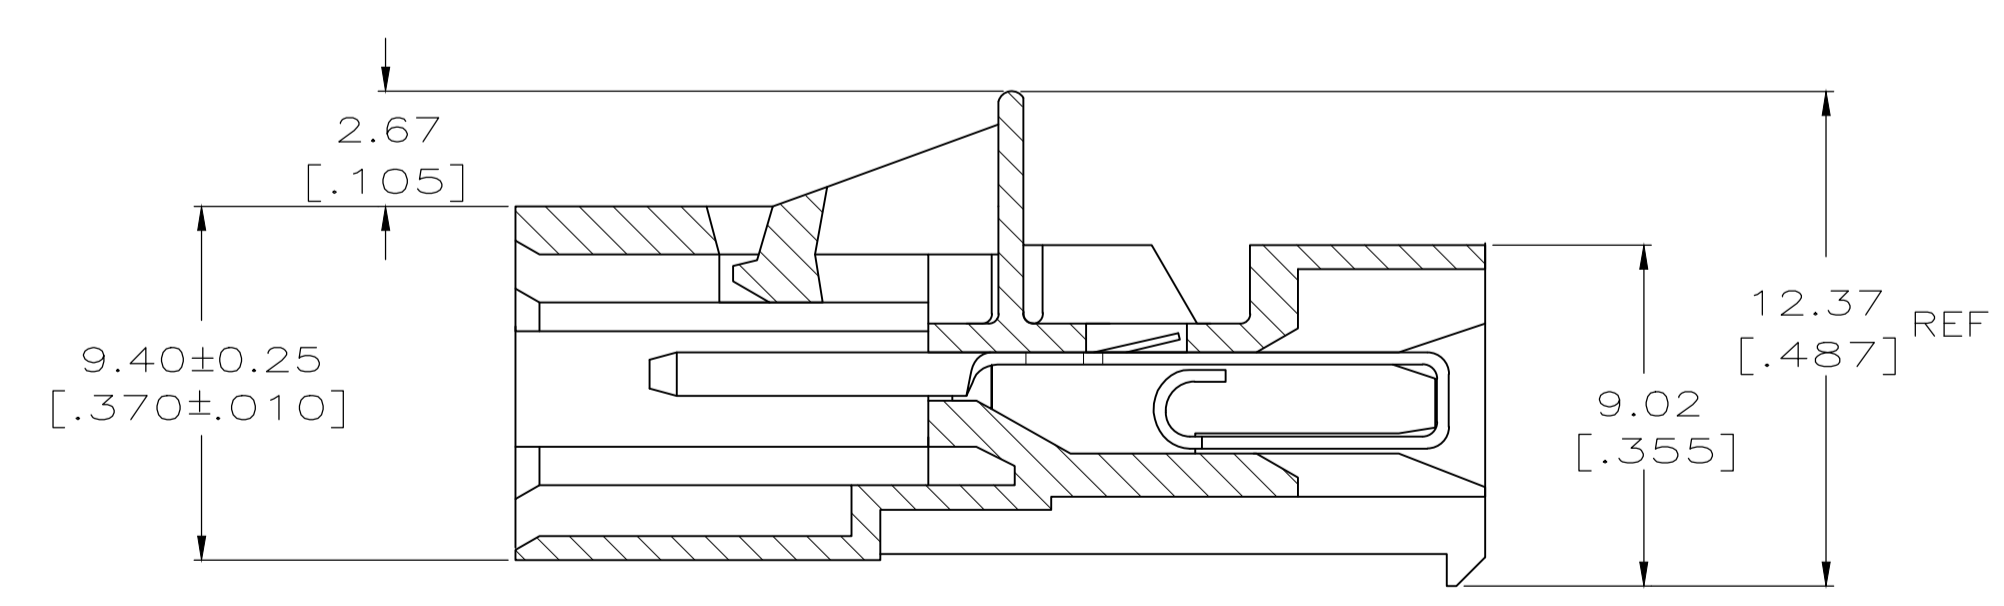
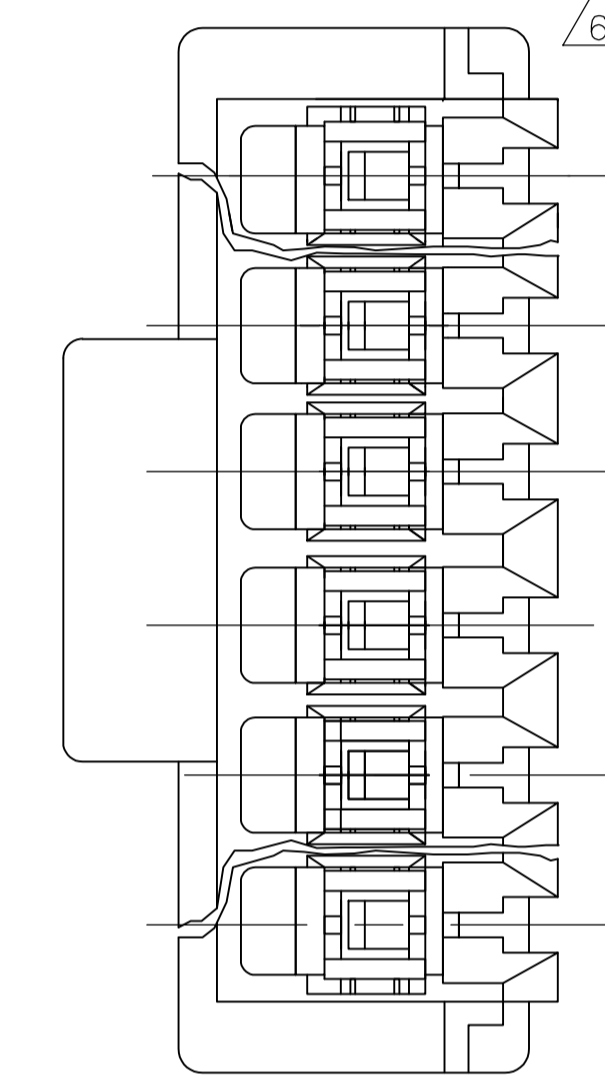
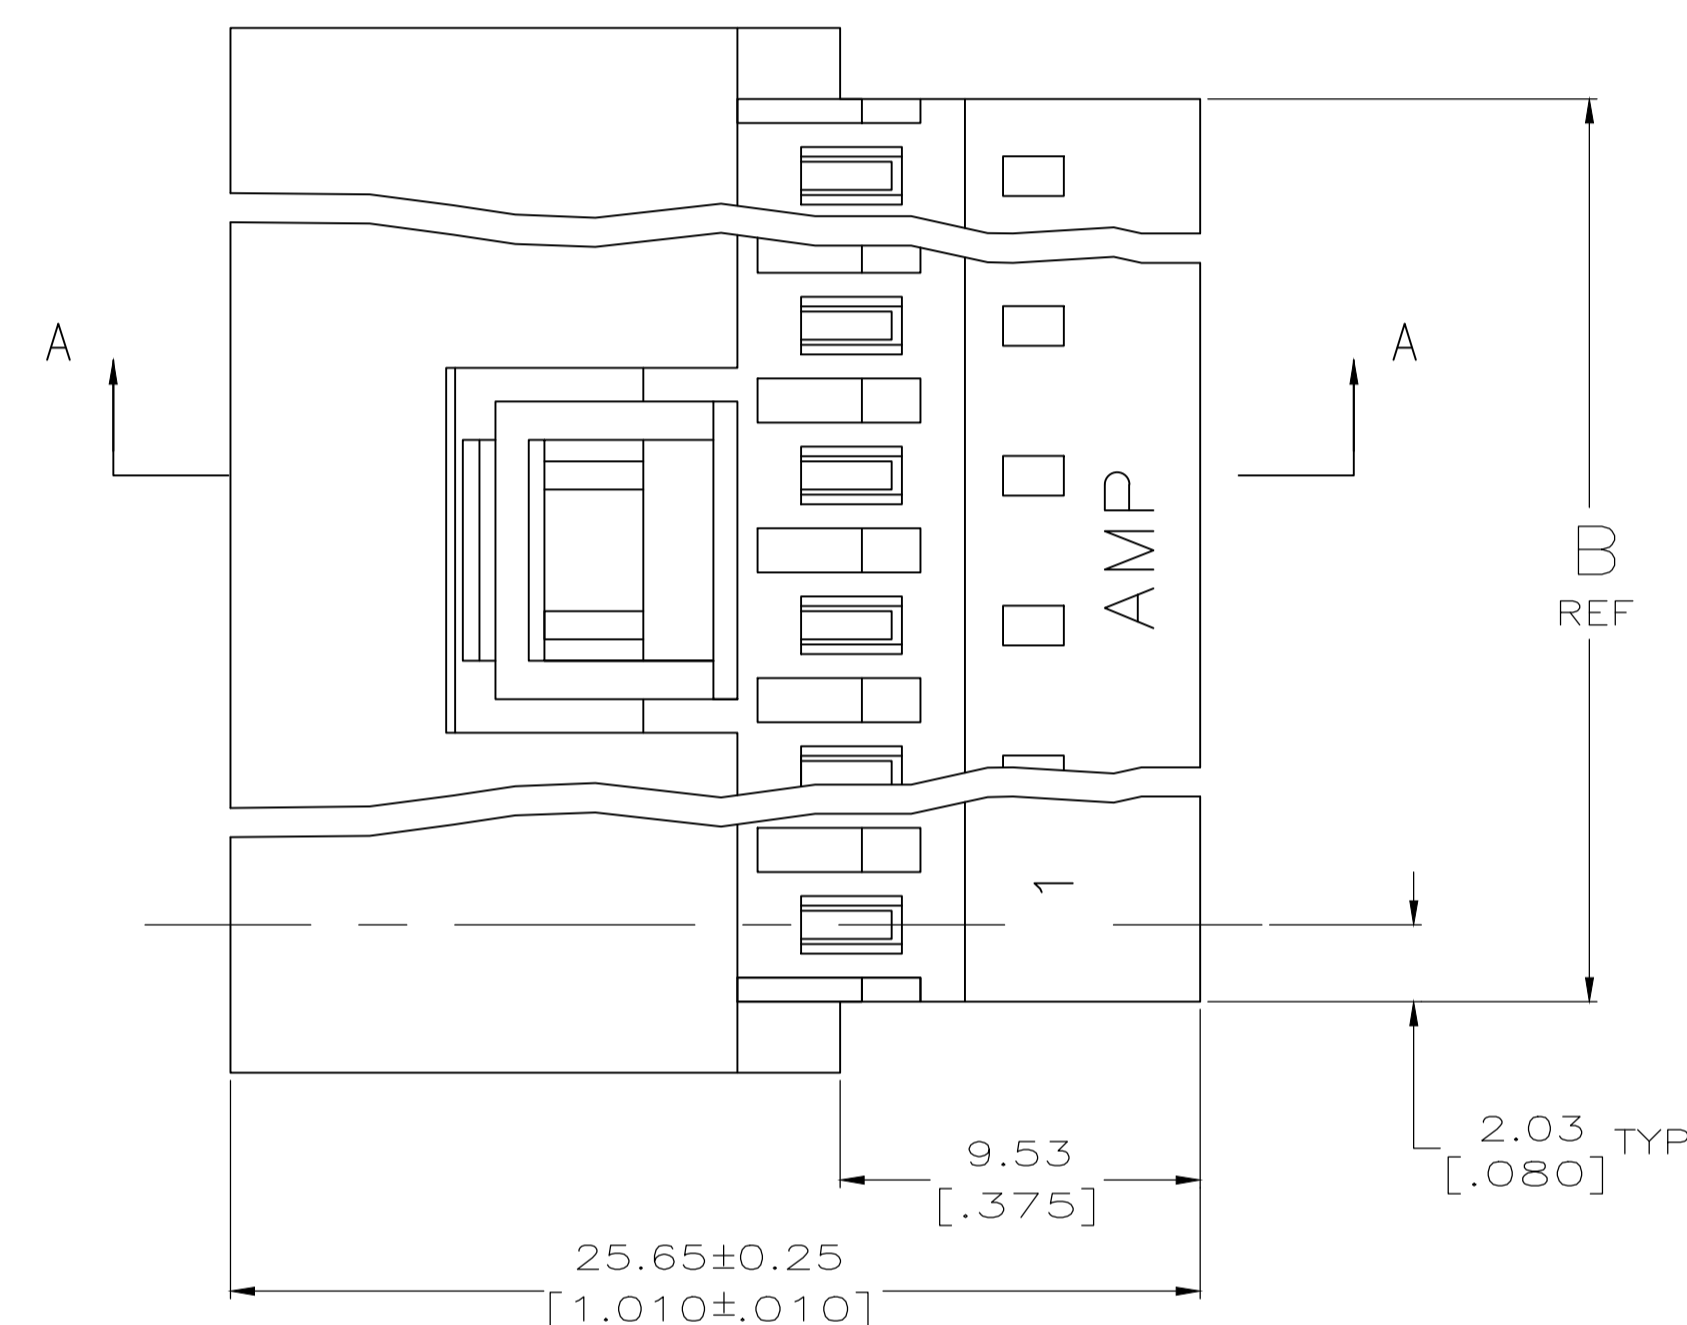


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
M		REVISED PER ECR-20-000808	22MAY2020	PC	SW		

- MATERIAL: CONNECTOR- NYLON UL94V-2 (ORANGE).
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00076 [.000030] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00068 [.000027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
OR
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00076 [.000030] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00068 [.000027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
- CONTACTS ACCEPT #18 AWG SOLID, FUSED STRANDED OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

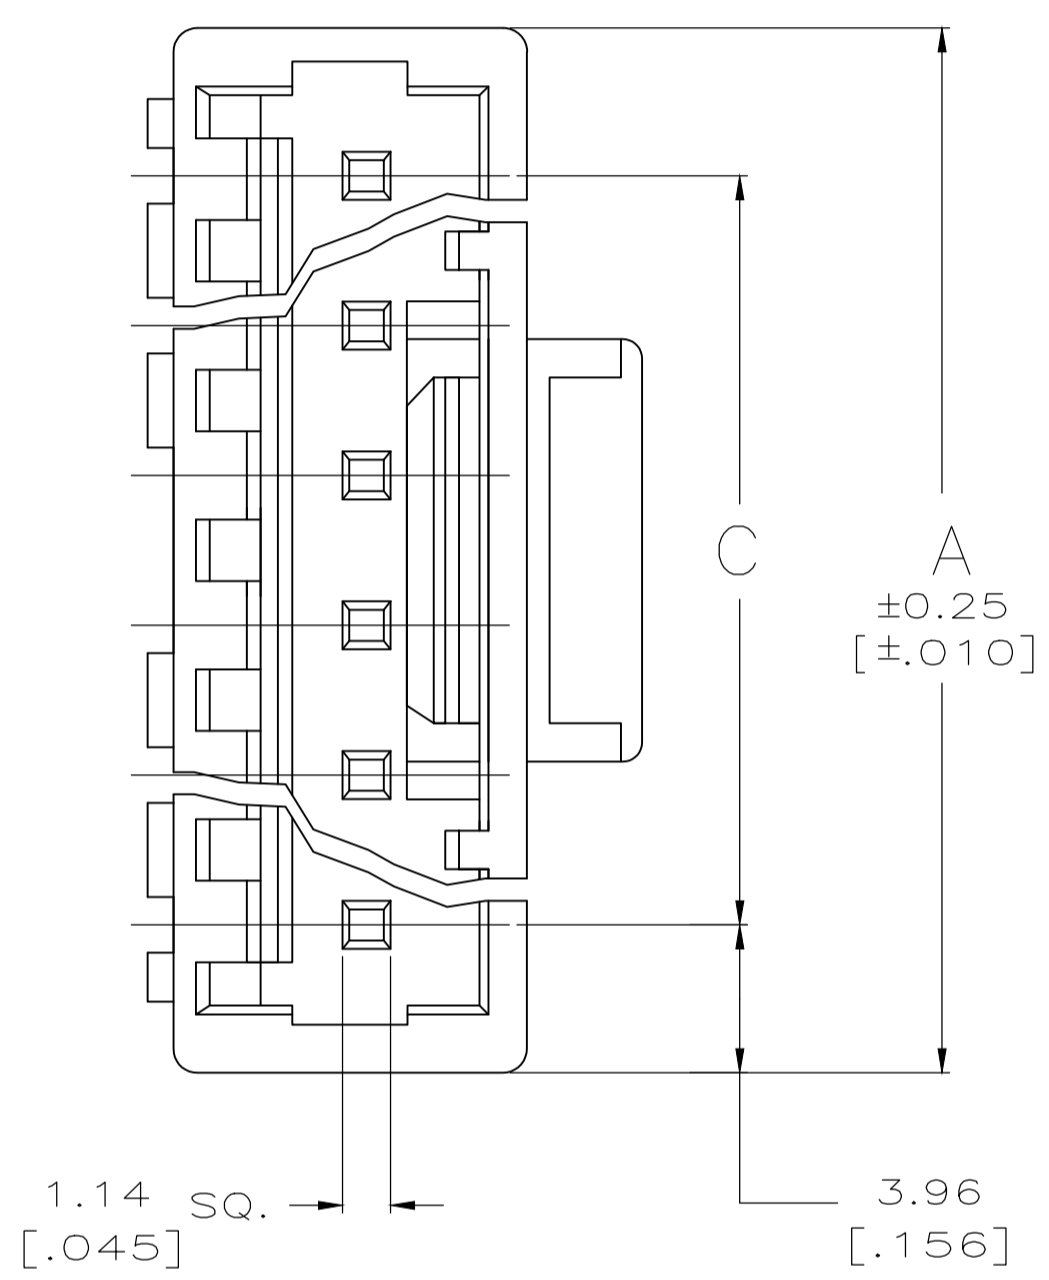

	C	B	A	NO. OF POSITIONS	PART NUMBER	FINISH
	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	5-644807-4	TIN
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-644807-5	TIN
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-644807-2	TIN
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-644807-9	TIN
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-644807-6	TIN
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-644807-4	TIN
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-644807-3	TIN
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-644807-2	TIN
6	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	2-644807-4	TIN-LEAD
SUPERSEDED	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	1-644807-5	TIN-LEAD
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	1-644807-2	TIN-LEAD
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	1-644807-9	TIN-LEAD
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	1-644807-6	TIN-LEAD
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	1-644807-4	TIN-LEAD
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	1-644807-3	TIN-LEAD
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	1-644807-2	TIN-LEAD
OBSOLETE						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN: B. LEWIS 12-16-94
CHK: R. SWING 12-16-94
APVD: -

DIMENSIONS: mm [INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: SEE NOTE 1
FINISH: SEE NOTE 1

WEIGHT: -
CUSTOMER DRAWING

SIZE: A1
SCALE: 5:1
SHEET: 1 OF 1
REV: M

MTA-156
POSTED CONNECTOR ASSEMBLY,
18 AWG

00779C=644807

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)