
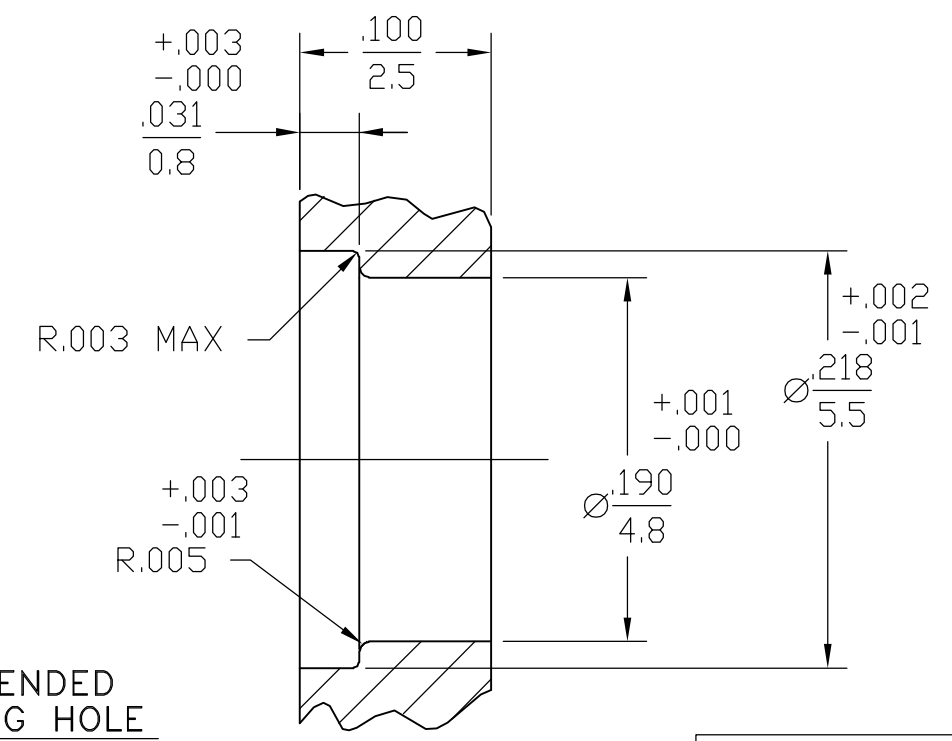


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| | | | | | | | |
|-----|------|-----------|-----|----------------------------------|-----------|------|------|
| LOC | DIST | REVISIONS | | | | | |
| HC | 00 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | A | REVISED, REDRAWN IN TYCO FORMAT. | 05AUG1997 | KYLE | RDP |

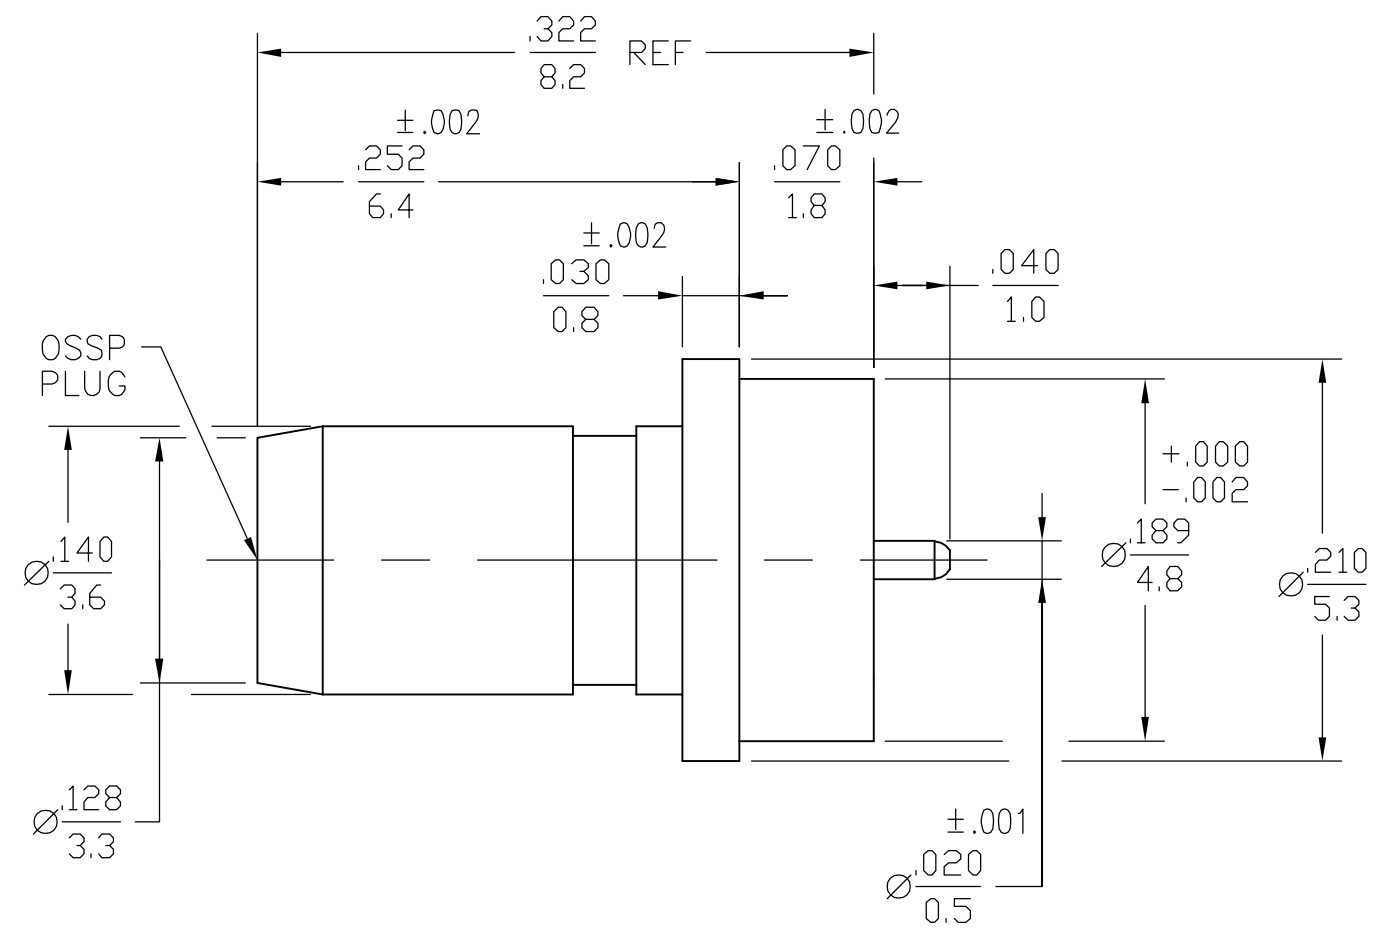

RECOMMENDED MOUNTING HOLE

1059902-1
PART NUMBER

| ELECTRICAL | MECHANICAL | ENVIRONMENTAL |
|--|---|---|
| Nominal Impedance (Ohms) 50 | Interface Dimensions PER TYCO ELECTRONICS CATALOG | TEMPERATURE RATING -65° TO +125°C |
| Frequency Range (GHz) DC to 18.0 | Recommended Mating Torque 12-15 IN-LBS | Vibration MIL-STD-202, Method 204, Condition D |
| Volt Rating (VRMS MAX) @ Sea Level 335 | Force to Engage and Disengage (In-Lbs MAX) 3.0 | Shock MIL-STD-202, Method 213, Condition I |
| VSWR 1.05 + .01f(GHz) | | Thermal Shock MIL-STD-202, Method 107, Condition B, EXCEPT HIGH TEMP +125°C |
| Insertion Loss (dB MAX) .05 √f(GHz) | | Moisture Resistance MIL-STD-202, Method 106 |
| RF Leakage (dB MIN) -[100-f(GHz)] | | Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray |
| Corona, 70,000 Ft (VRMS MIN) N/A | | |
| Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750 | | |
| Contact Resistance (Milliohms MAX) | | |
| Center Contact 10.0 | | |
| Outer Contact 2.0 | | |
| Cable to Housing N/A | | |
| RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 667 | | |
| I.R.(Megohms MIN) 5,000 | | |

| COMPONENT | MATERIAL | FINISH |
|----------------|--|---------------------------|
| HOUSING | STAINLESS STEEL PER ASTM A 484 AND ASTM A582, TYPE 303 | GOLD PLATE PER ASTM B 488 |
| DIELECTRIC | PTFE FLUOROCARBON PER ASTM D 1710 | N/A |
| CENTER CONTACT | IRON-NICKEL ALLOY PER AMS-I-23011 | GOLD PLATE PER ASTM B 488 |
| HERMETIC SEAL | GLASS BEAD | N/A |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|-----------------------|--|--------------------|--|
| DIMENSIONS: INCHES/mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN JB 23FEB1987 | Tyco Electronics Corporation Harrisburg, PA 17105-3608 |
| | 0 PLC ± - | CHK MH/M 27FEB1987 | |
| | 1 PLC ± - | APVD BAR 03MAR1987 | |
| | 2 PLC ± - | NAME | |
| | 3 PLC ± .005 | PRODUCT SPEC | OSSP FEETHRU PLUG, HERMETIC, PANEL, STRAIGHT TERMINAL (4757-3204-00) |
| | 4 PLC ± - | APPLICATION SPEC | SIZE A3 CAGE CODE 00779 DRAWING NO C-1059902 RESTRICTED TO - |
| | ANGLES ± 1° | WEIGHT - | SCALE 10:1 SHEET 1 of 1 REV A |
| MATERIAL SEE TABLE | FINISH SEE TABLE | CUSTOMER DRAWING | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)