
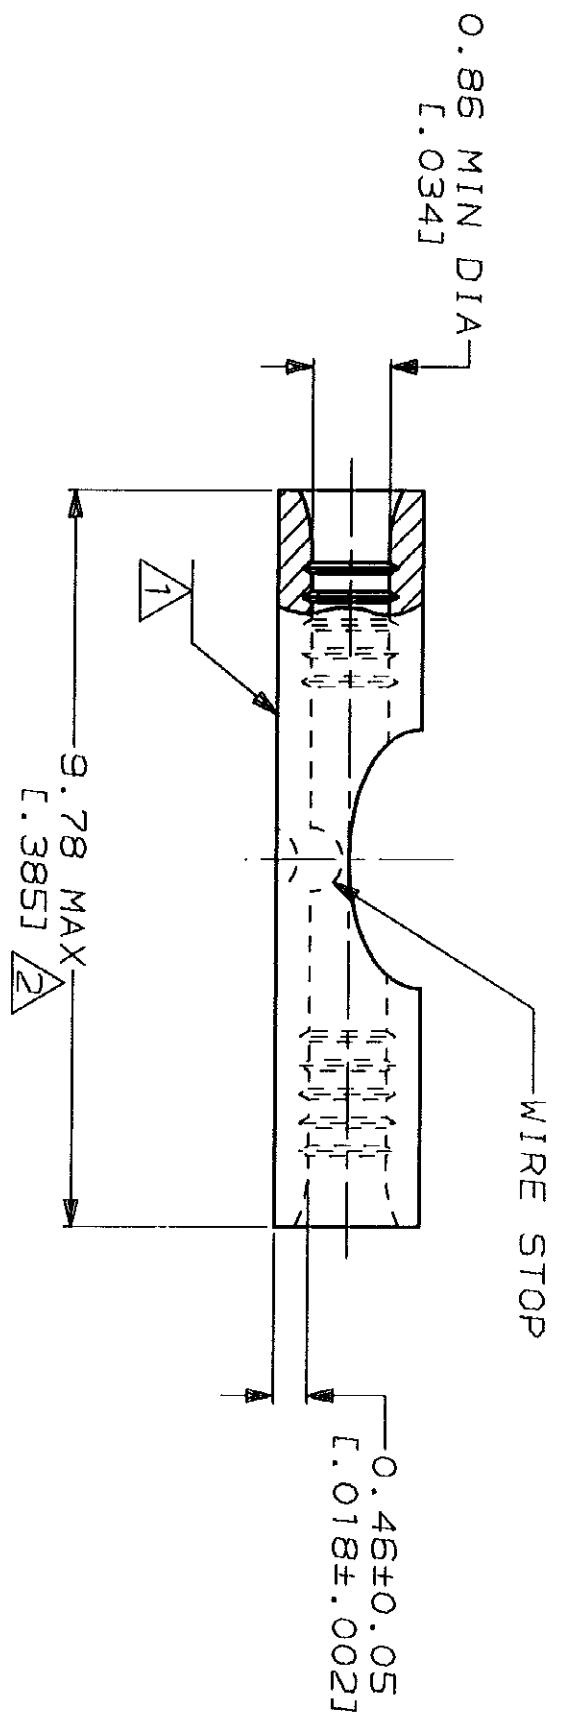


LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14	P			RELEASED PER 0720-0008-93	2-24-93	YB DAP

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	UL E13288 Listed
26-22 AWG STRANDED	NOT LISTED
UL LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP APPROX AS SHOWN
 △ MAXIMUM LENGTH DOES NOT INCLUDE
 MANUFACTURING TABS

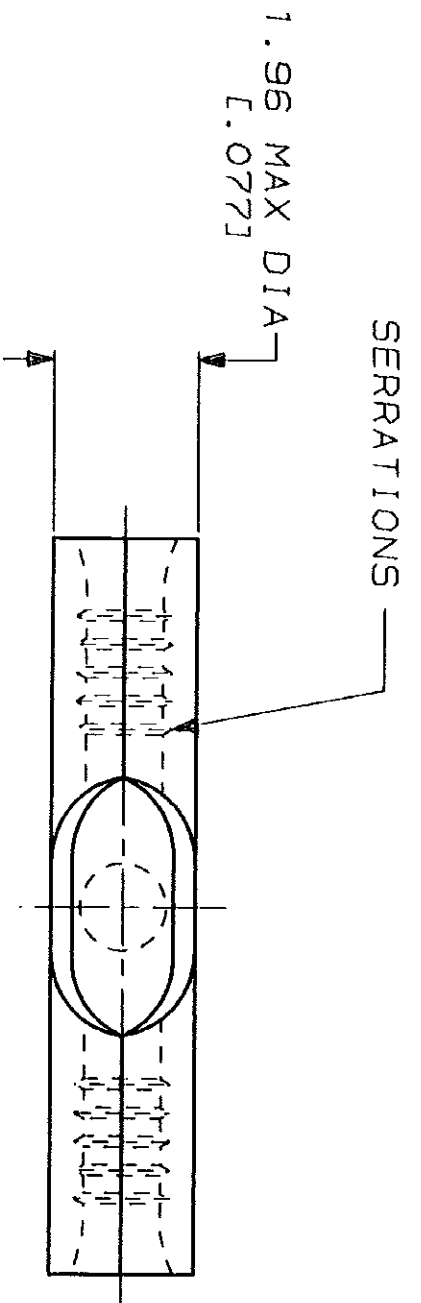

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE: 170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
0.1-0.41 mm² [202-810] CIR MILS
STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLC DEC ±
3 PLC DEC ±
ANGLES

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.00254 [L.000100] MIN
THK PER MIL-T-10727

DR 2-24-93 TA BRINKMAN	DR 2-24-93 TA BRINKMAN
CHK 2-24-93 DA PATTERSON	CHK 2-24-93 DA PATTERSON
APPD 2-24-93 DE MILLER	APPD 2-24-93 DE MILLER
APPD 2-24-93 JL MECKLEY	APPD 2-24-93 JL MECKLEY
PRODUCT SPEC	PRODUCT SPEC
APPLICATION SPEC	APPLICATION SPEC
WEIGHT	WEIGHT

AMP	AMP Incorporated Harrisburg, PA 17105-3608
NAME	SPLICE, BUTT, STRAP, BUDGET
SIZE	CAGE CODE 00779 DRAWING NO G-321024
SCALE	10:1
SHEET	1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)