


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AB	REVISED PER ECO-09-015488	06JUL09	HMR	GS
	AC	REVISED PER ECO-18-007231	07AUG2018	RS	MZ

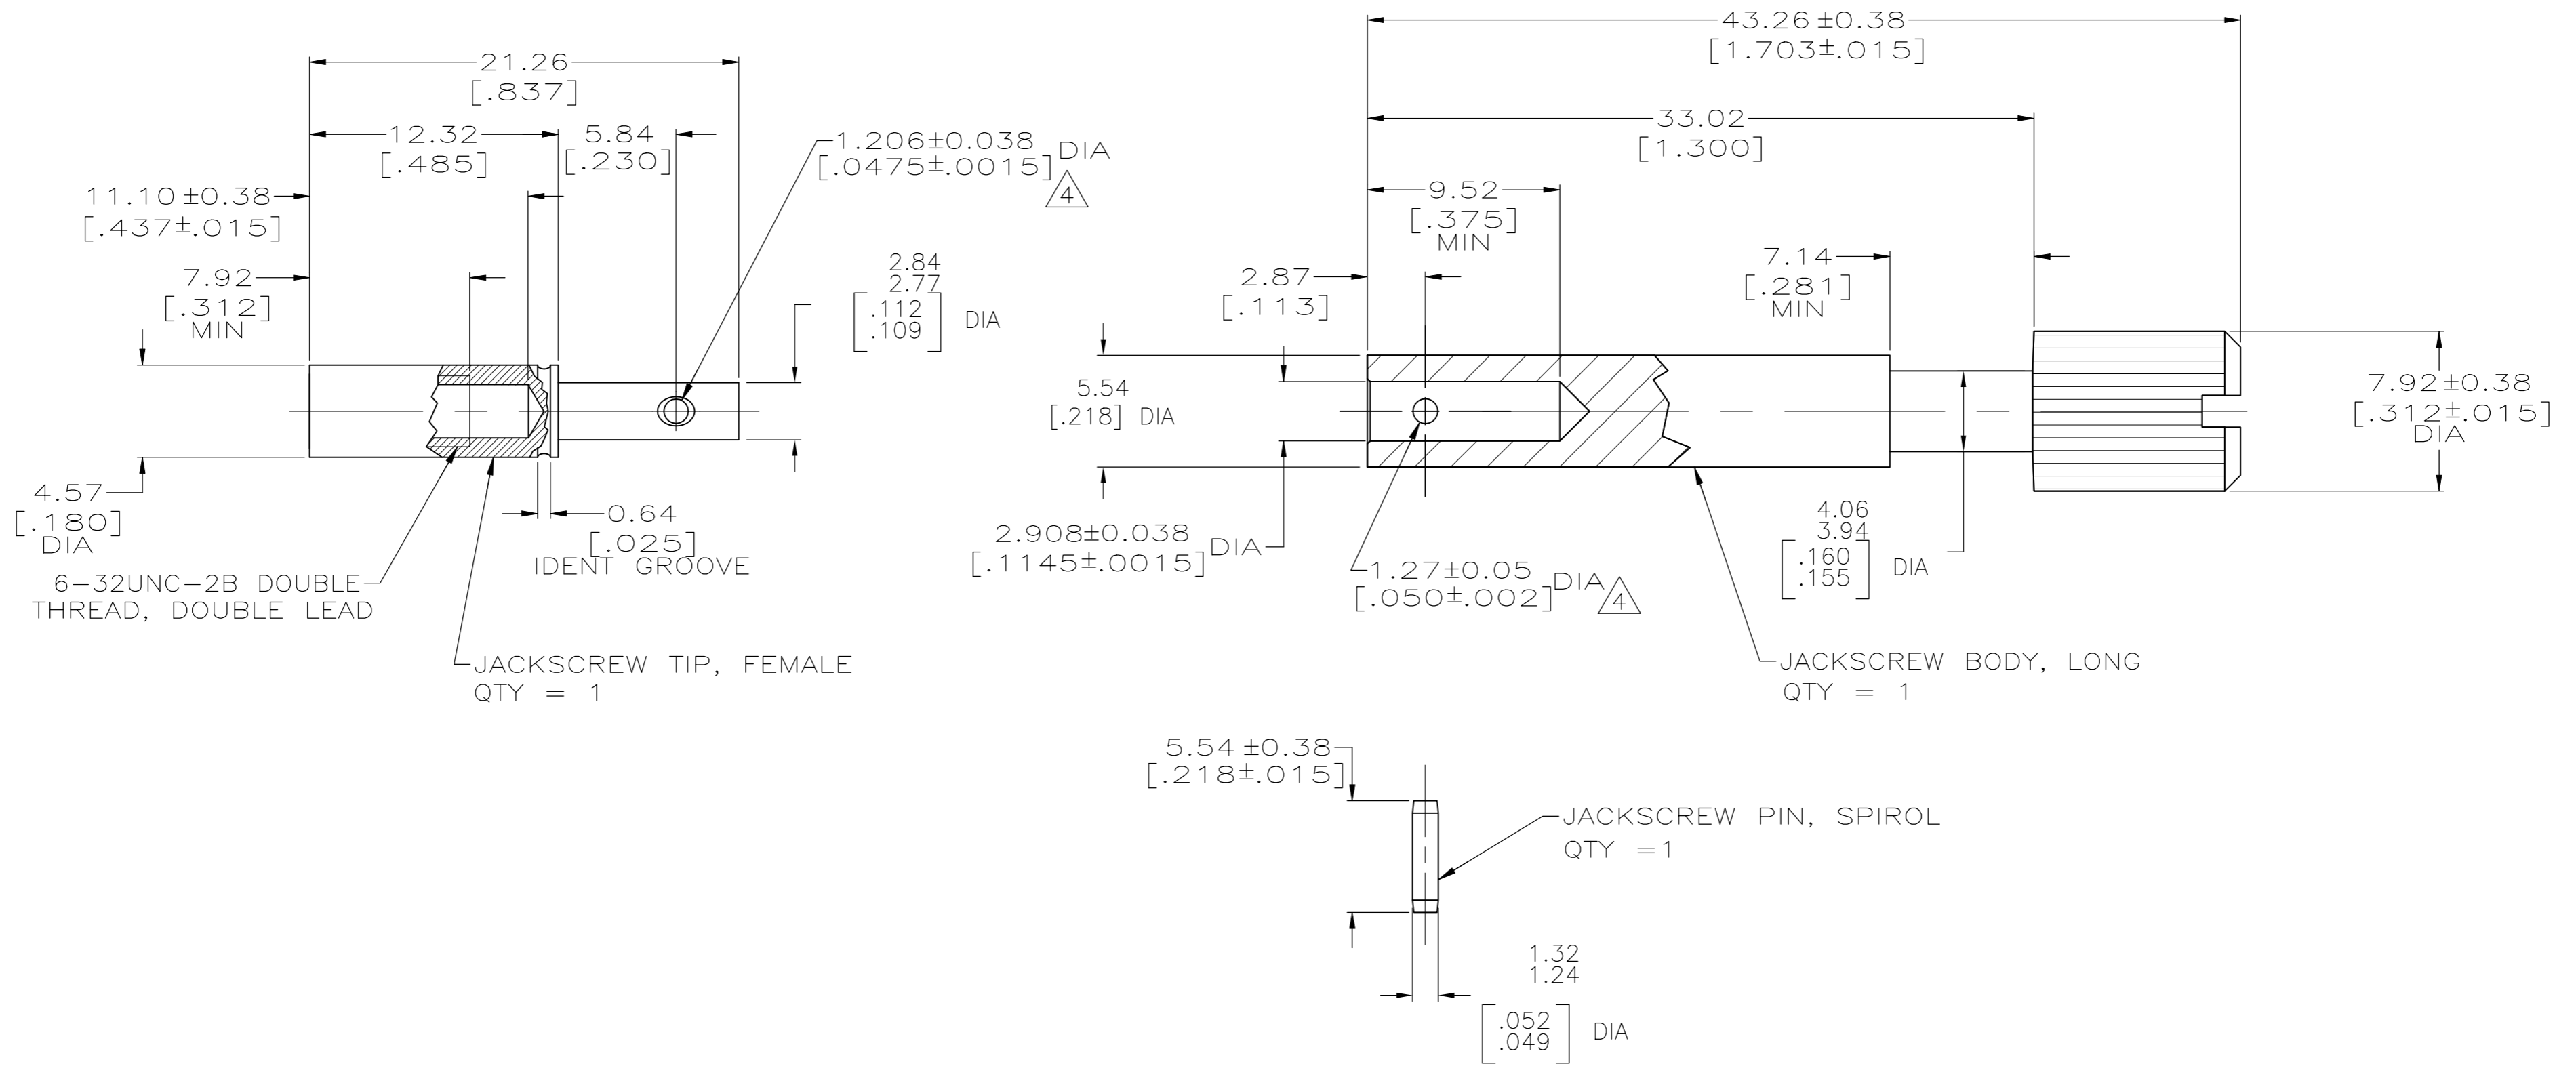

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ±.007 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION, CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

OBSOLETE	6	1-200867-1
	6	200867-1
	NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.FOLTZ 05/19/94	TE Connectivity Ltd.	
DIMENSIONS: mm		CHK R.STONE 06/16/94		
		APVD -	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -	JACKSCREW KIT, UNASSEMBLED, FEMALE, M SERIES	
0 PLC ± -		APPLICATION SPEC -	-	
1 PLC ± -		WEIGHT -	SIZE A2	CAGE CODE 00779
2 PLC ± 0.13 [.005]		CUSTOMER DRAWING	DRAWING NO C=200867	RESTRICTED TO -
3 PLC ± -		SCALE 4:1	SHEET 1 of 1	REV AC
4 PLC ± -				
ANGLES ± -				
MATERIAL JACKSCREW BODY: 2				
JACKSCREW TIP: 1				
JACKSCREW PIN: 2				
FINISH JACKSCREW BODY: 5				
JACKSCREW PIN: PASSIVATED				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)