


THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
 - a - As supplied
 - b - After unrestricted recovery

NOTES

RAYCLAD TRADEMARK & PART NO.,
DRAWING PART NO., & REF. DESIGNATIONS
LOCATED ON OUTSIDE SURFACE.

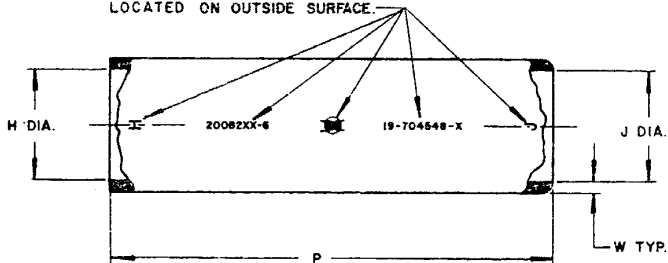

ORDERING INFORMATION

Matl No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
6	Silicone, flame retarded	RT 602	1.35

Add material number as suffix to part number;
Example - Order 200B212-6 when silicone part is required.

TABLE OF DIMENSIONS

PART NO.	H		J		P	±10%	W							
	Min a	Max b	Min a	Max b			a	b						
200B202-	1.12	.37	1.12	.37	—	3.00	—	.07						
200B212-	1.70	.50	1.70	.50	—	3.00	—	.07						
200B222-	2.30	.75	2.30	.75	—	3.00	—	.10						
200B233-	3.12	.95	3.12	.95	—	3.00	—	.12						
200B246-	4.05	1.37	4.05	1.37	—	3.00	—	.12						

 RAYCLAD TUBES INCORPORATED A SUBSIDIARY OF RAYCHEM CORPORATION	E.O.	REV	DATE	DESCRIPTION	DRN	DD	PART DESCRIPTION	PART NO.	REV LTR			
	HOP	D	9/67	Retyperd.	CHK'D	KT				SLEEVE, STRAIGHT	200B202 thru 246	D
					AUTH	RW						
					AUTH	HP						
								DATE	September 1, 1967			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)