


## CUSTOMER DRAWING

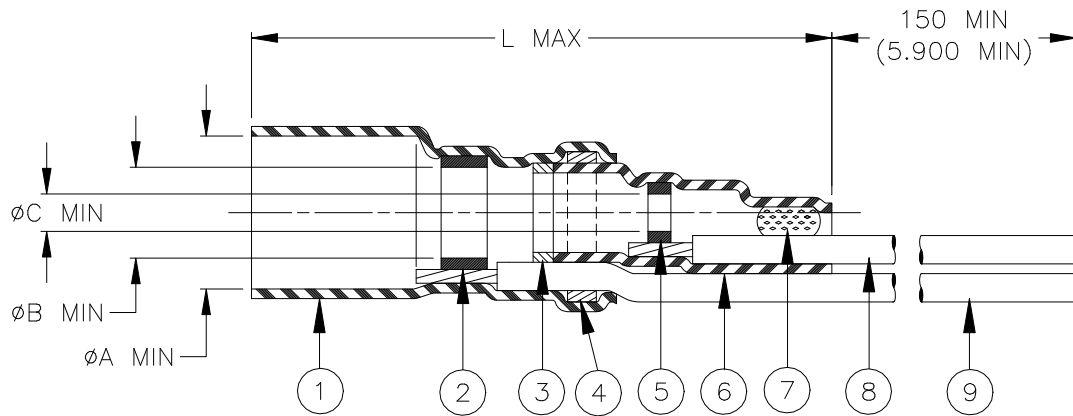

Product Name	Component Dimensions				"GA" Wire Gauge (AWG)	Cable Dimensions				
	L max	øA min	øB min	øC min		øD	øE	øF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-020-20-N	32.0 (1.260)	6.30 (0.250)	4.60 (0.180)	2.80 (0.110)	20	2.40 (0.095) to 6.30 (0.250)	2.30 (0.090) to 4.60 (0.180)	0.30 (0.012)	19.0 (0.750)	6.0 (0.235)
B-020-22-N					22					
B-020-24-N					24					
B-020-26-N					26					


### MATERIALS

1. & 6. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. & 5. SOLDER PREFORMS WITH FLUX:  
SOLDER: TYPE Sn63 per ANSI J-STD-006.  
FLUX: TYPE ROL0 per ANSI J-STD-004.
- 3., 4. & 7. MELTABLE RINGS: Thermally stabilized thermoplastic.
8. CONDUCTOR LEAD: MIL-W-22759/32-GA-9, AWG "GA" (see table). ETFE insulated, stranded tin plated copper.  
Color: white.
9. GROUND LEAD: MIL-W-22759/32-GA-6, AWG "GA" (see table). ETFE insulated, stranded tin plated copper.  
Color: blue.

### APPLICATION

1. The parts covered by this document are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silver-plated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
2. Parts will meet the requirements of Raychem Specification RT-1404 when installed per Raychem RPIP-500-03.
3. Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:

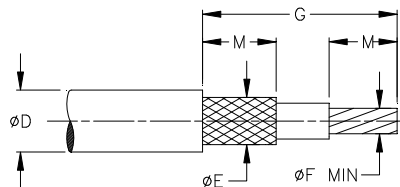

<b>TE</b> TE Connectivity		<b>Raychem</b> Devices		TITLE: <b>COAXIAL SOLDERSLLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>B-020-GA-N</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOCUMENT REVISION:  C		REVISION ISSUE DATE:  12-MAR-2020	
DRAWN BY: M. FORONDA	DATE: 26-JUL-2000	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669	SCALE: None	SIZE: A	SHEET: 1 of 1	

© 2000 - 2020 TE Connectivity Corporation. All Rights Reserved.

TE Connectivity, TE Connectivity (logo), Raychem and SolderSleeve are trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)