



a) Part as supplied

463W033

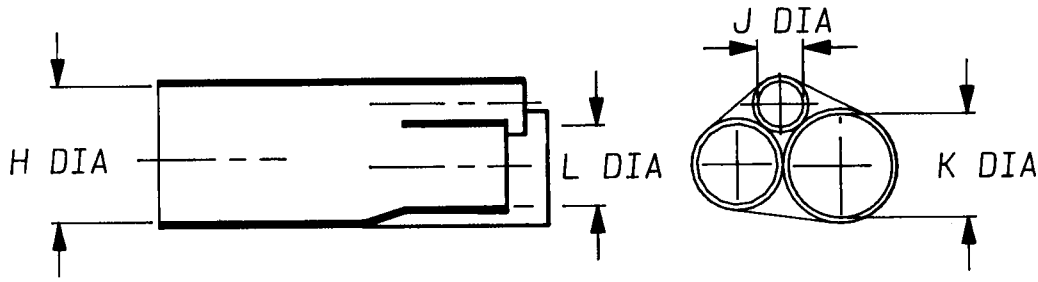

b) Part after unrestricted recovery

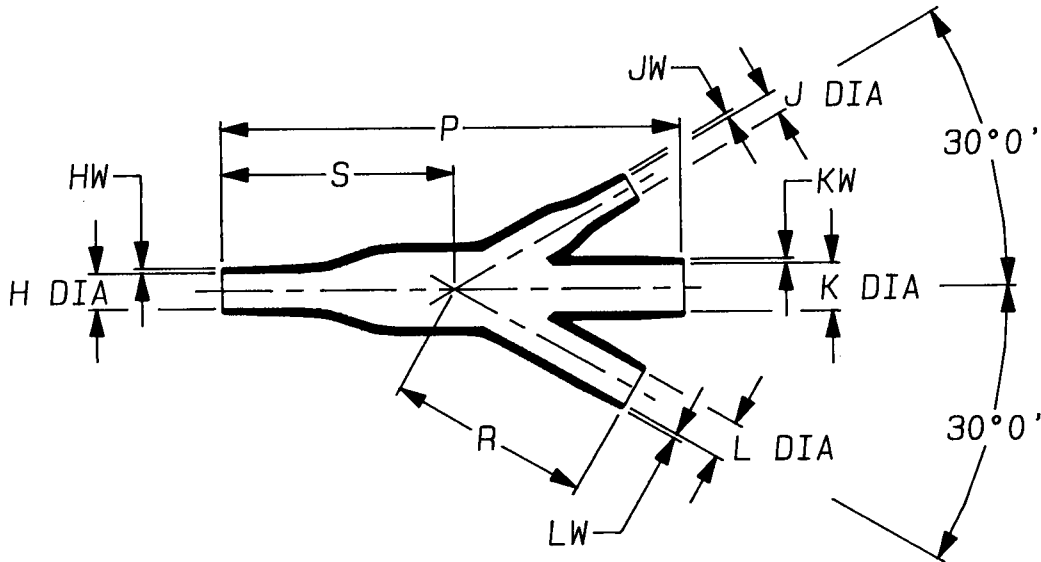

Part No.	H		J		K		L		P	R	S	HW	JW	KW	LW
	Min	Max	Min	Max	Min	Max	Min	Max	±5%	±5%	±5%	±20%	±20%	±20%	±20%
	a	b	a	b	a	b	a	b	b	b	b	b	b	b	b
463W033	26	5.7	7.0	4.7	18	10.5	14	8.4	95	42	48	2.5	1.0	1.0	1.0

Copyright (!)
Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked *[Signature]* Issue 1 Date August 1999


Conforms to ISO Recommendations
3rd Angle Projection
Not to Scale

Approval Design *[Signature]*

MKTG. *[Signature]*


G.A.

Downloaded From Oneyac.com



Iss.	Date	E.C.R. No.	Details of Change

Ordering Information

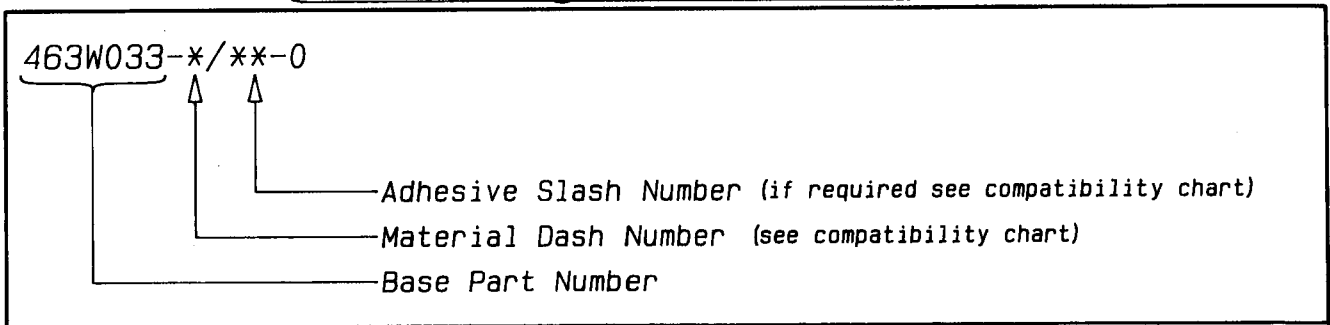

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)