


LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		S1		REVISED PER ECO-15-008427	08JUN15	JR	DH

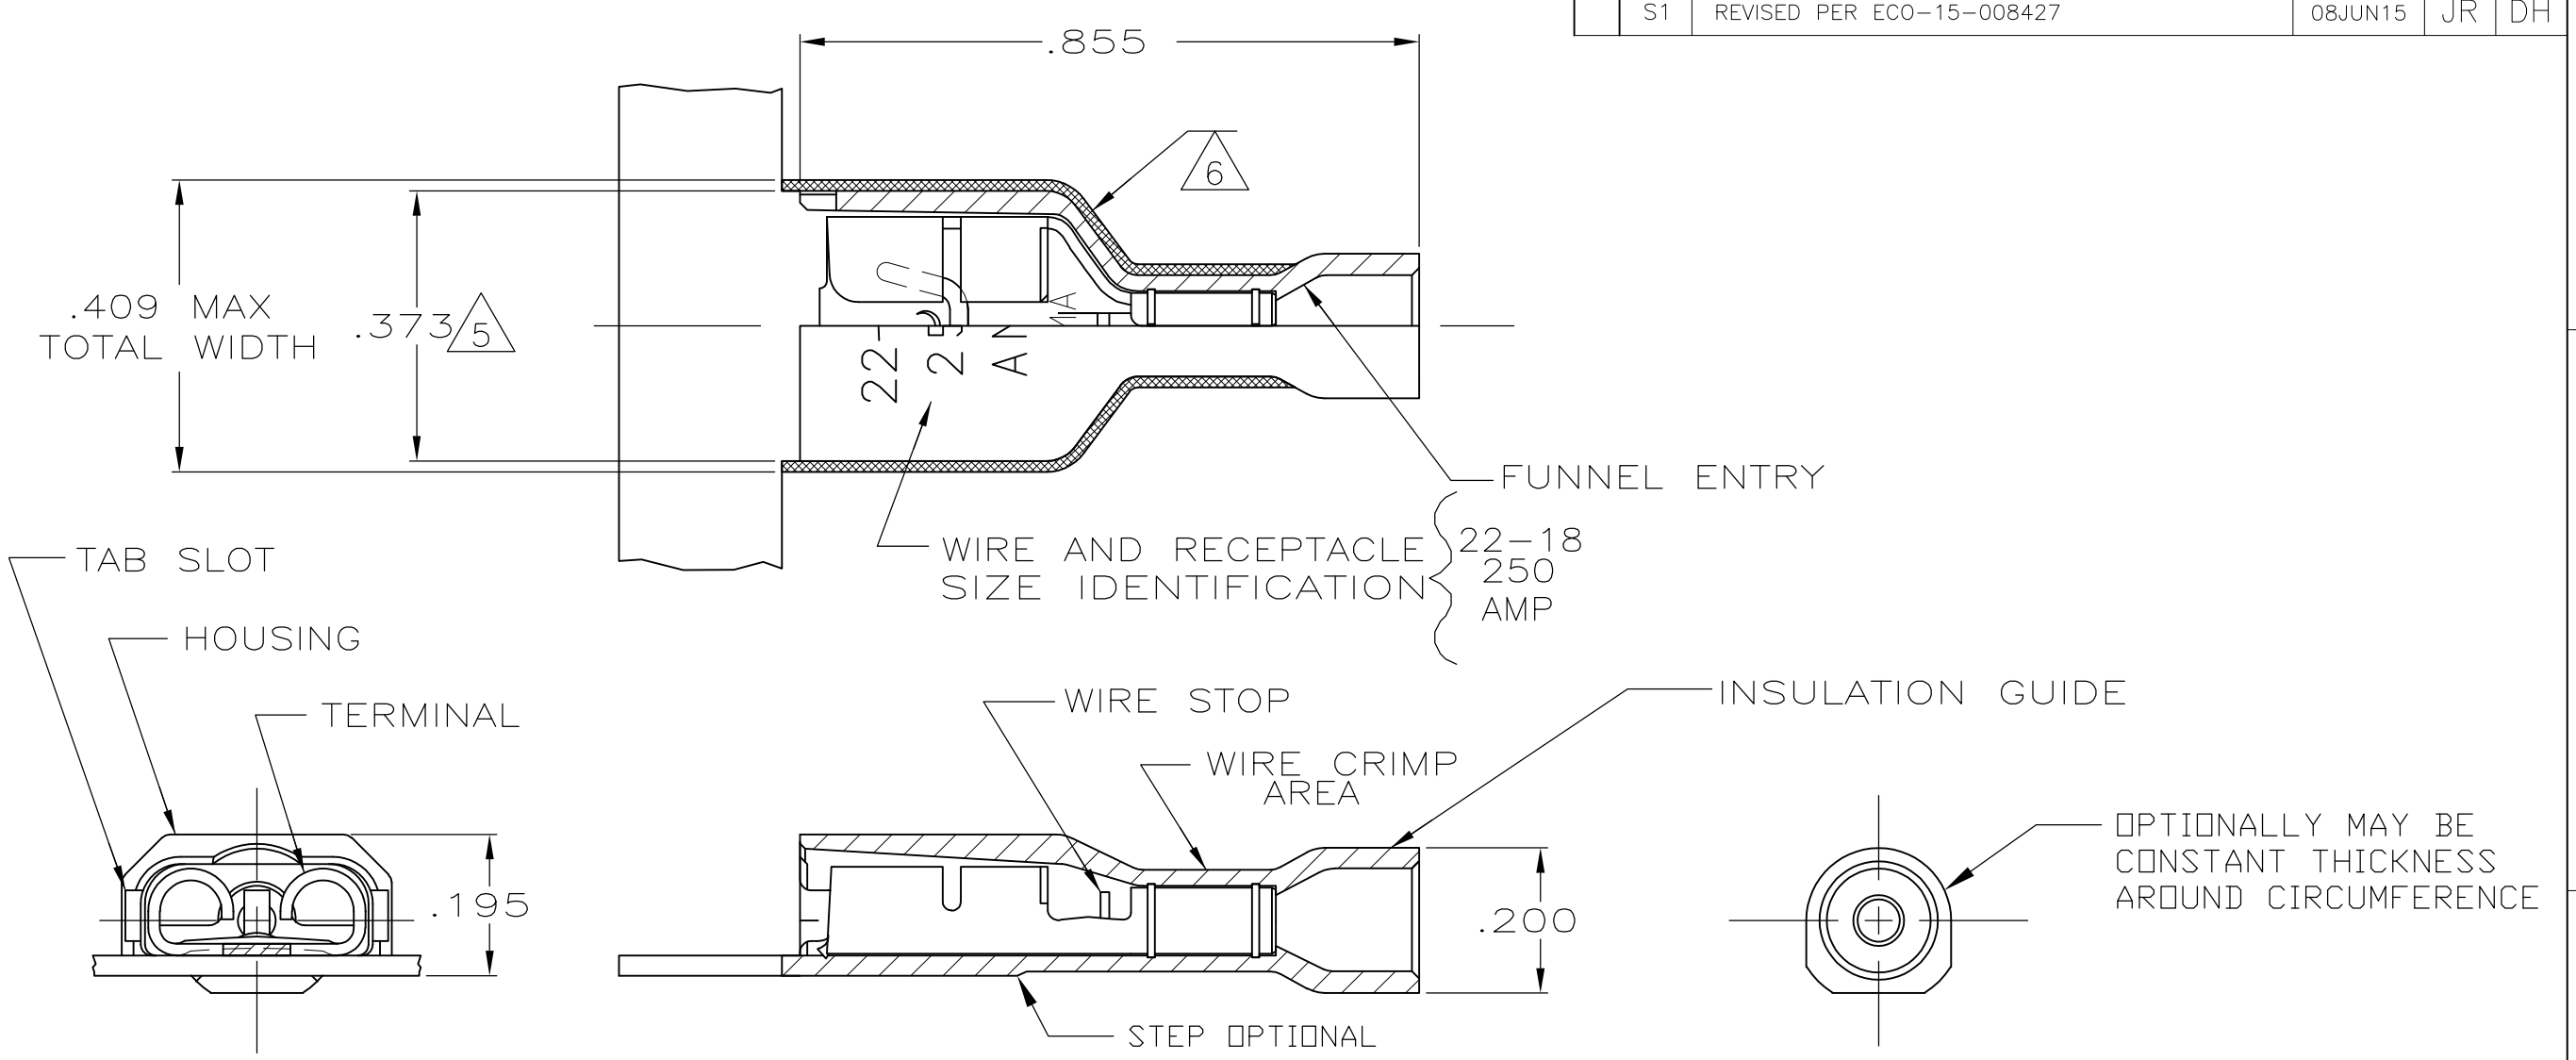

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

STANDARD	HOUSING:NYLON,COLOR-BLACK TRANSLUCENT RECEPTACLE:BRASS, TIN	9-520183-2
BULK	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN	5-520183-2
STANDARD	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:#3 HARD PH BRONZE, TIN	2-520183-4
	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN	2-520183-2
PACKAGING	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/18/88	<b>STE</b> TE Connectivity	
		CHK JR RUTH 10/18/88		
APVD K RANDOLPH 10/21/88		NAME RECEPTACLE ASSY,ULTRA-FAST, .250 SERIES,22-18 AWG		
DIMENSIONS: INCHES		PRODUCT SPEC 108-2043		SIZE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-2123		CAGE CODE
0 PLC ± -		WEIGHT -		DRAWING NO
1 PLC ± -		CUSTOMER DRAWING		RESTRICTED TO
2 PLC ± -		SCALE 4:1		SHEET 1 OF 1
3 PLC ± .015		REV S1		
4 PLC ± -				
ANGLES ± -				
FINISH				
SEE TABLE				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)