


### Hermetically Sealed (Continued)

#### Panel Feed-through Hermetic Adapter Jack to Jack<sup>1</sup>



**Electrical**  
 VSWR (GHz) — 1.10 + .01f  
 RF Leakage (dB) — -(100 - fGHz)

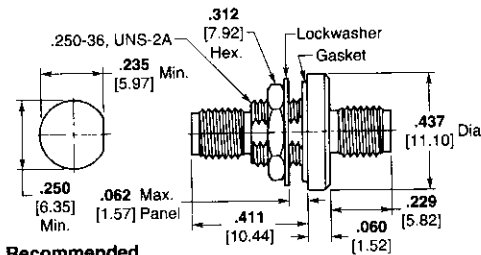


**Recommended  
Mounting Hole**

M/A-COM Part No. (Ref. Only)	AMP Part No.
1084-1100-00	1045725-1

#### O-Ring Gasket Hermetic Seal Flange Mount Jack Receptacle<sup>1,2</sup>



**Electrical**  
 VSWR (GHz) — 1.05 + .01f  
 RF Leakage (dB) — -(70 - fGHz)

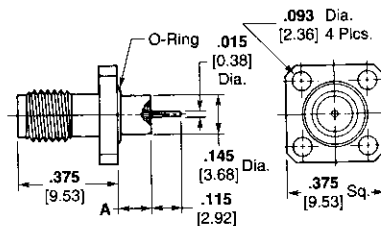


M/A-COM Part No. (Ref. Only)	AMP Part No.	Dim. A
1052-3121-00	1045593-1	.093 2.36

#### Rear Mount Jack Receptacle<sup>1,2</sup>



**Electrical**  
 VSWR (GHz) — 1.05 + .014f  
 RF Leakage (dB) — -(70 - fGHz)

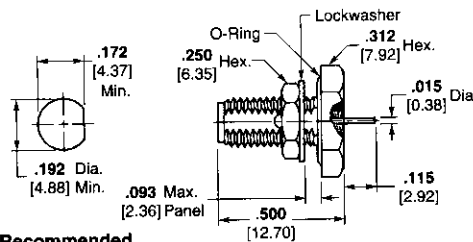


**Recommended  
Mounting Hole**

M/A-COM Part No. (Ref. Only)	AMP Part No.
1056-3100-00	1045633-1

#### Bulkhead Feed-through Front Mount Jack Receptacle



**Electrical**  
 VSWR (GHz) — 1.05 + .01f  
 RF Leakage (dB) — -(70 - fGHz)



M/A-COM Part No. (Ref. Only)	AMP Part No.
1058-3100-00	1045642-1

1. Finish: Gold plate, -00. For passivated stainless steel, change the Part Number suffix from -00 to -02.  
 2. On passivated versions (-02), pins are pre-tinned using Sn60 solder.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)