


SECTION A-A
SCALE 10:1

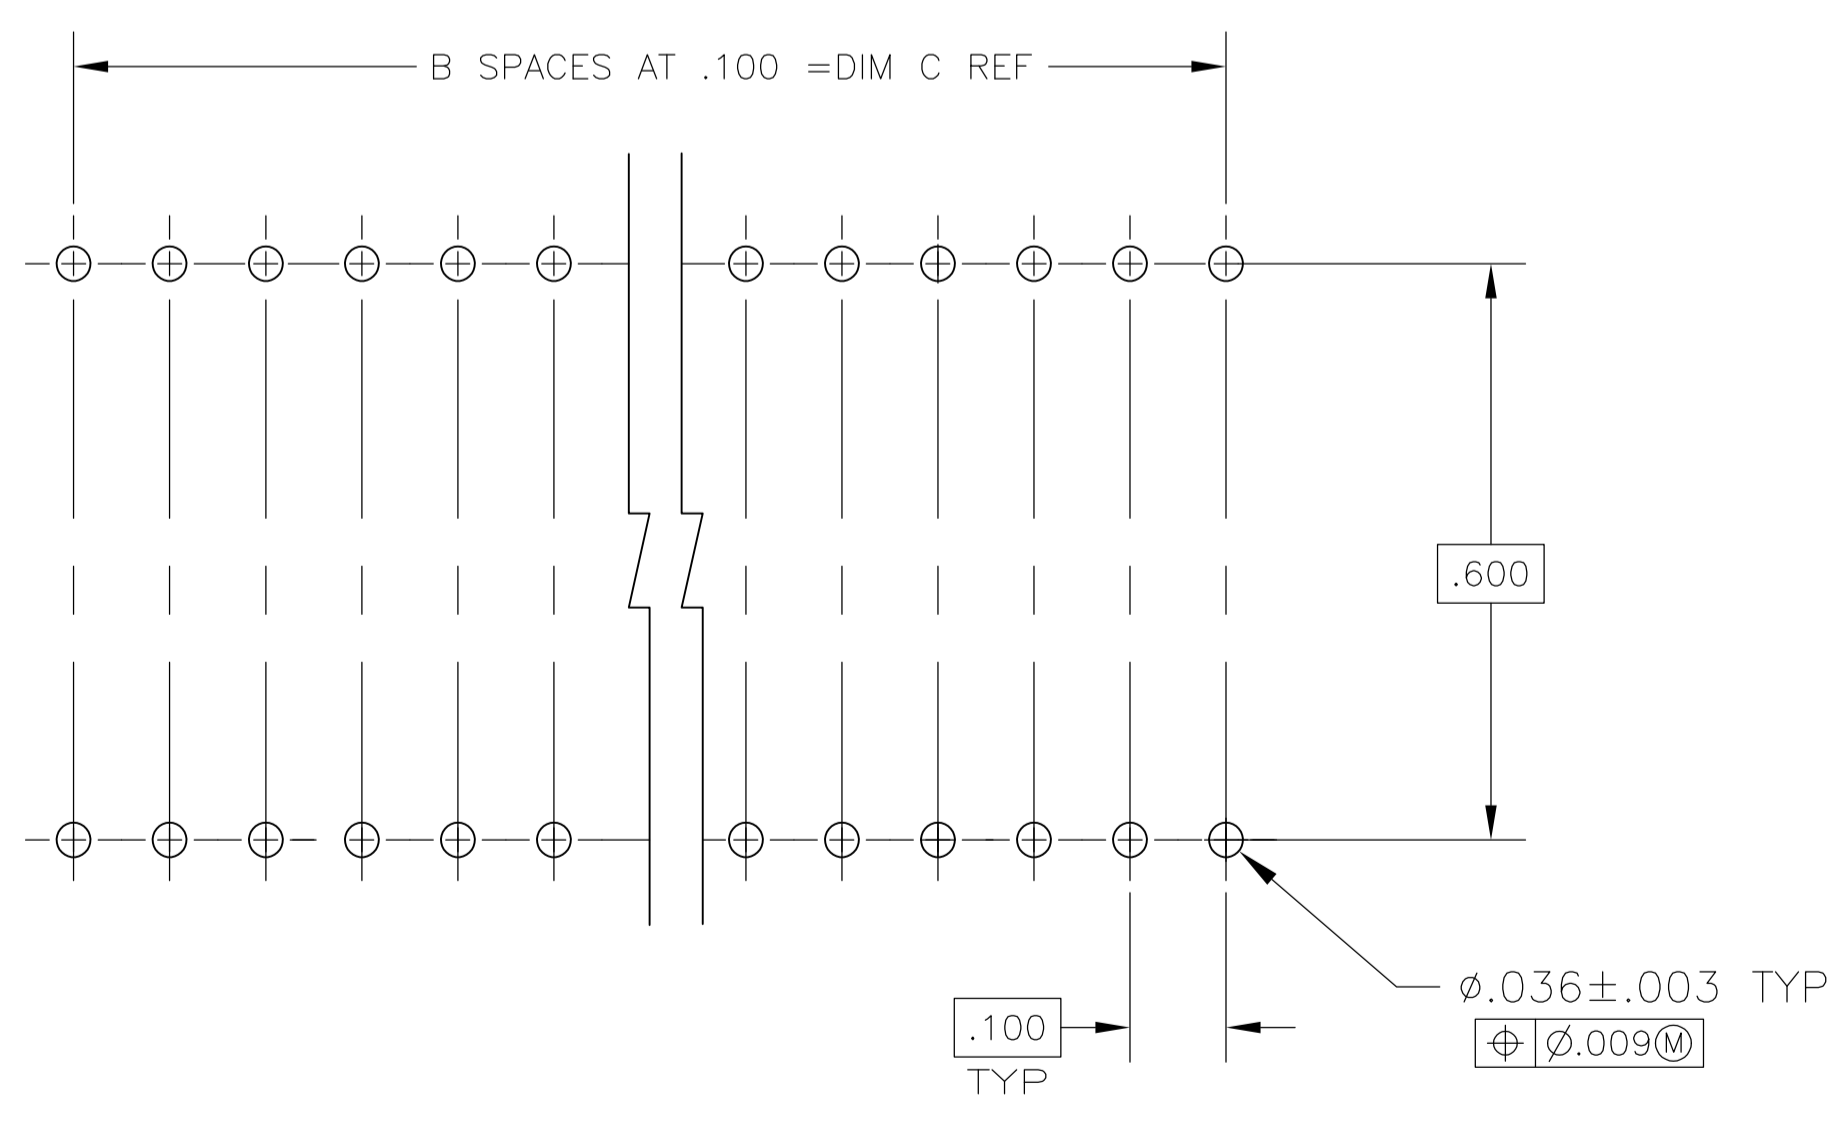

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

- 1 RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
- 2 TUBE LOADED FOR AUTOMATIC INSERTION.
- 3 BECU CONTACT - PLATED WITH TWO .000030 MIN THIK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 4 PHOS. BRZ CONTACT - PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 5 GLASS FILLED THERMOPLASTIC, 94V-0, BLACK

	3	2.300	23	2.395	48	1-1825109-4
	3	1.900	19	1.995	40	1-1825109-3
	3	1.300	13	1.395	28	1-1825109-2
(B) OBSOLETE	3	1.100	11	1.195	24	1-1825109-1
	4	2.300	23	2.395	48	1825109-4
	4	1.900	19	1.995	40	1825109-3
	4	1.300	13	1.395	28	1825109-2
(B) OBSOLETE	4	1.100	11	1.195	24	1825109-1
CONTACT & FINISH		DIM C	B SPCS	DIM A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± .005
4. PLC	± .005
ANGLES	± 0°30'

MATERIAL: SEE TABLE

FINISH: SEE TABLE

APPROVED: B.S. VISWESWARA (22APR05), K. WRIGHT

NAME: DIP SOCKET ASSY, LADDER, DIPLOMATE, .600 CL, LEAD FREE

PRODUCT SPEC: 108-1066

APPLICATION SPEC: 114-1049

WEIGHT: -

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 1825109

RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: 5:1

SHEET: 1 OF 1

REV: B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)