
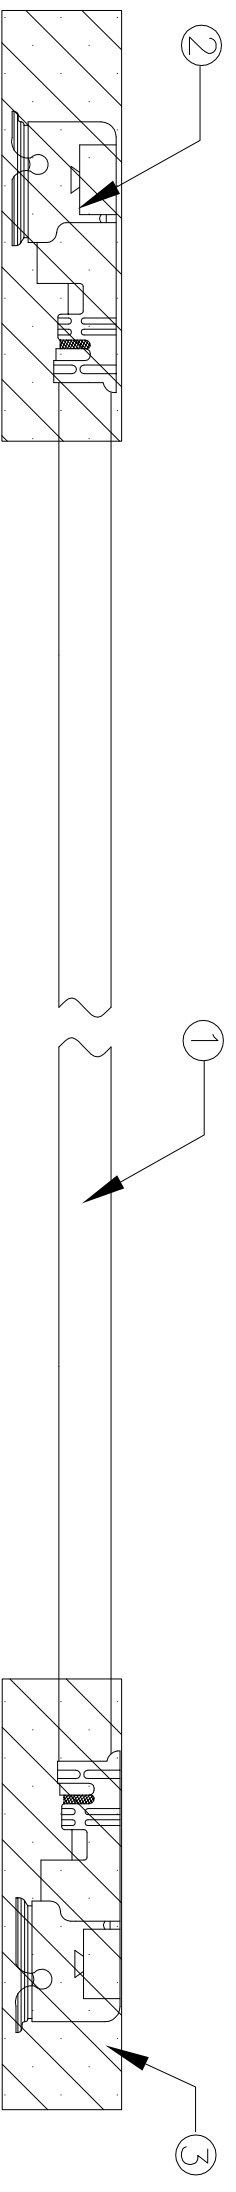


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

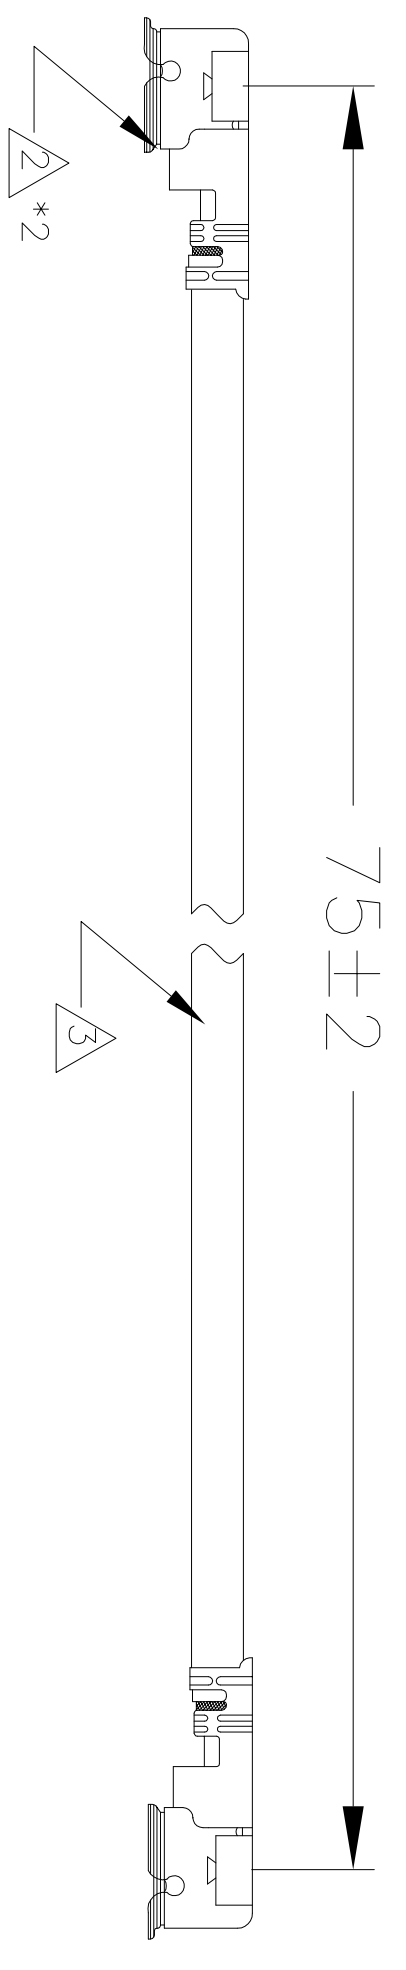

- NOTES:
1. CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY
 HI-POT: 200 VDC FOR 100MS
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHZ
 VSWR: 1.5:1 MAX
 2. CONNECTOR: TYPE III U.FL
 SUPPLIER: I-PEX 20278-112R-13
 3. CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
 4. TWO END U.FL CONNECTORS IN THE SAME POSITION
 5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0	PLC	± .
1	PLC	± .
2	PLC	± .
3	PLC	± .
4	PLC	± .
	ANGLES	± .
	FINISH	± .



30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, RED COLOR, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

DWN Chen Ping 12FEB09
 CHK Andrew Dong 12FEB09
 APVD Lucky Zhang 12FEB09
 Product spec
 APPLICATION SPEC
 WEIGHT
 CUSTOMER DRAWING

Tyco Electronics
 Tyco Electronics Corporation
 Harrisburg, PA 17105-3608

FWT3 Ericsson UMTS/Aux cable assembly
 red, 75mm, 0degree

SIZE A3
 CAGE CODE 00779
 DRAWING NO G=1513279
 SCALE N.T.S.
 SHEET 1 OF 1
 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)