
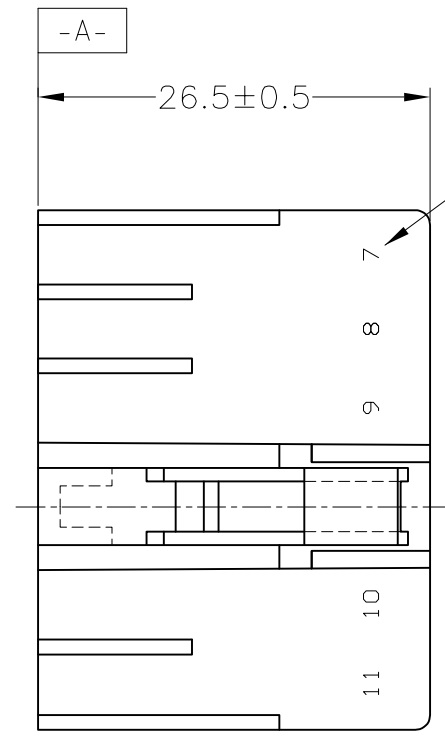
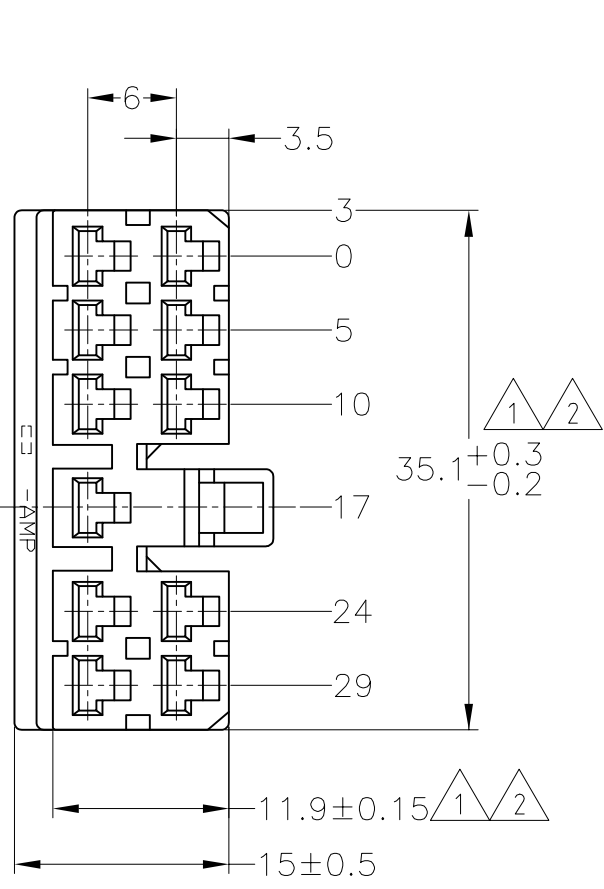


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J	-	F1 REVISED	ECR-14-017602	25NOV2014	TS KB

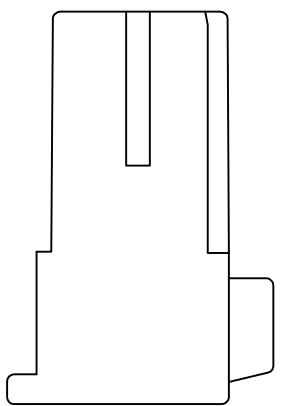

- ① -A- 面より 2mm の範囲で測定。
 - ② 相手ハウジングと所定の機能を満たして嵌合できること。
 - 3. 適用リセプタクルコンタクト型番：170177, 170286, 170307
 - 4. 適用製品規格番号：108-5093, 108-5099
 - 5. 相手ハウジングとの嵌合力は 29.4N (3Kg) 以下、
但し、コンタクトは含まない。
-
- ① TO BE MEASURED WITHIN 2mm FROM -A-
 - ② IN COUPLING WITH THE PLUG HOUSING MATING SATISFIES FUNCTION.
 - 3. APPLIDE CONTACTPART NUMBER: 170177, 170286 170307
 - 4. PRODUCT SPECIFICATION NUMBER: 108-5093, 108-5099
 - 5. IN COUPLING WITH THE PLUG HOUSING MATING FORCE 29.4N (3Kg) MAX. WITHOUT REC CONTACTS.





OBSOLETE	黄 / YELLOW	172024-7
OBSOLETE	灰 / GRAY	172024-6
OBSOLETE	青 / BLUE	172024-5
	緑 / GREEN	172024-4
OBSOLETE	茶 / BROWN	172024-3
	黒 / BLACK	172024-2
	自然色 / NATURAL	172024-1
	色 / COLOR	型番 / PART NUMBER

GENERAL TOLERANCE

10 ≥	: ±0.2
30 ≥ > 10	: ±0.25
100 ≥ > 30	: ±0.3
ANGLE : ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN T.SHINOHARA 30JUL09	 TE Connectivity
	0 PLC ± -	CHK K.BETSUI 30JUL09	
	1 PLC ± -	APVD K.BETSUI 30JUL09	
	2 PLC ± -	NAME	
MATERIAL 66 NYLON	FINISH -	PRODUCT SPEC SEE NOTE 4	MULTI-INTERLOCK CONNECTOR 11 POSITION PLUG HOUSING
		APPLICATION SPEC -	RESTRICTED TO -
		WEIGHT -	SIZE A3 CAGE CODE 00779 DRAWING NO C=172024
		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 of 1 REV F1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)