



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	B1	REVISED PER ECR-16-004169	19JAN2020	RZ RS

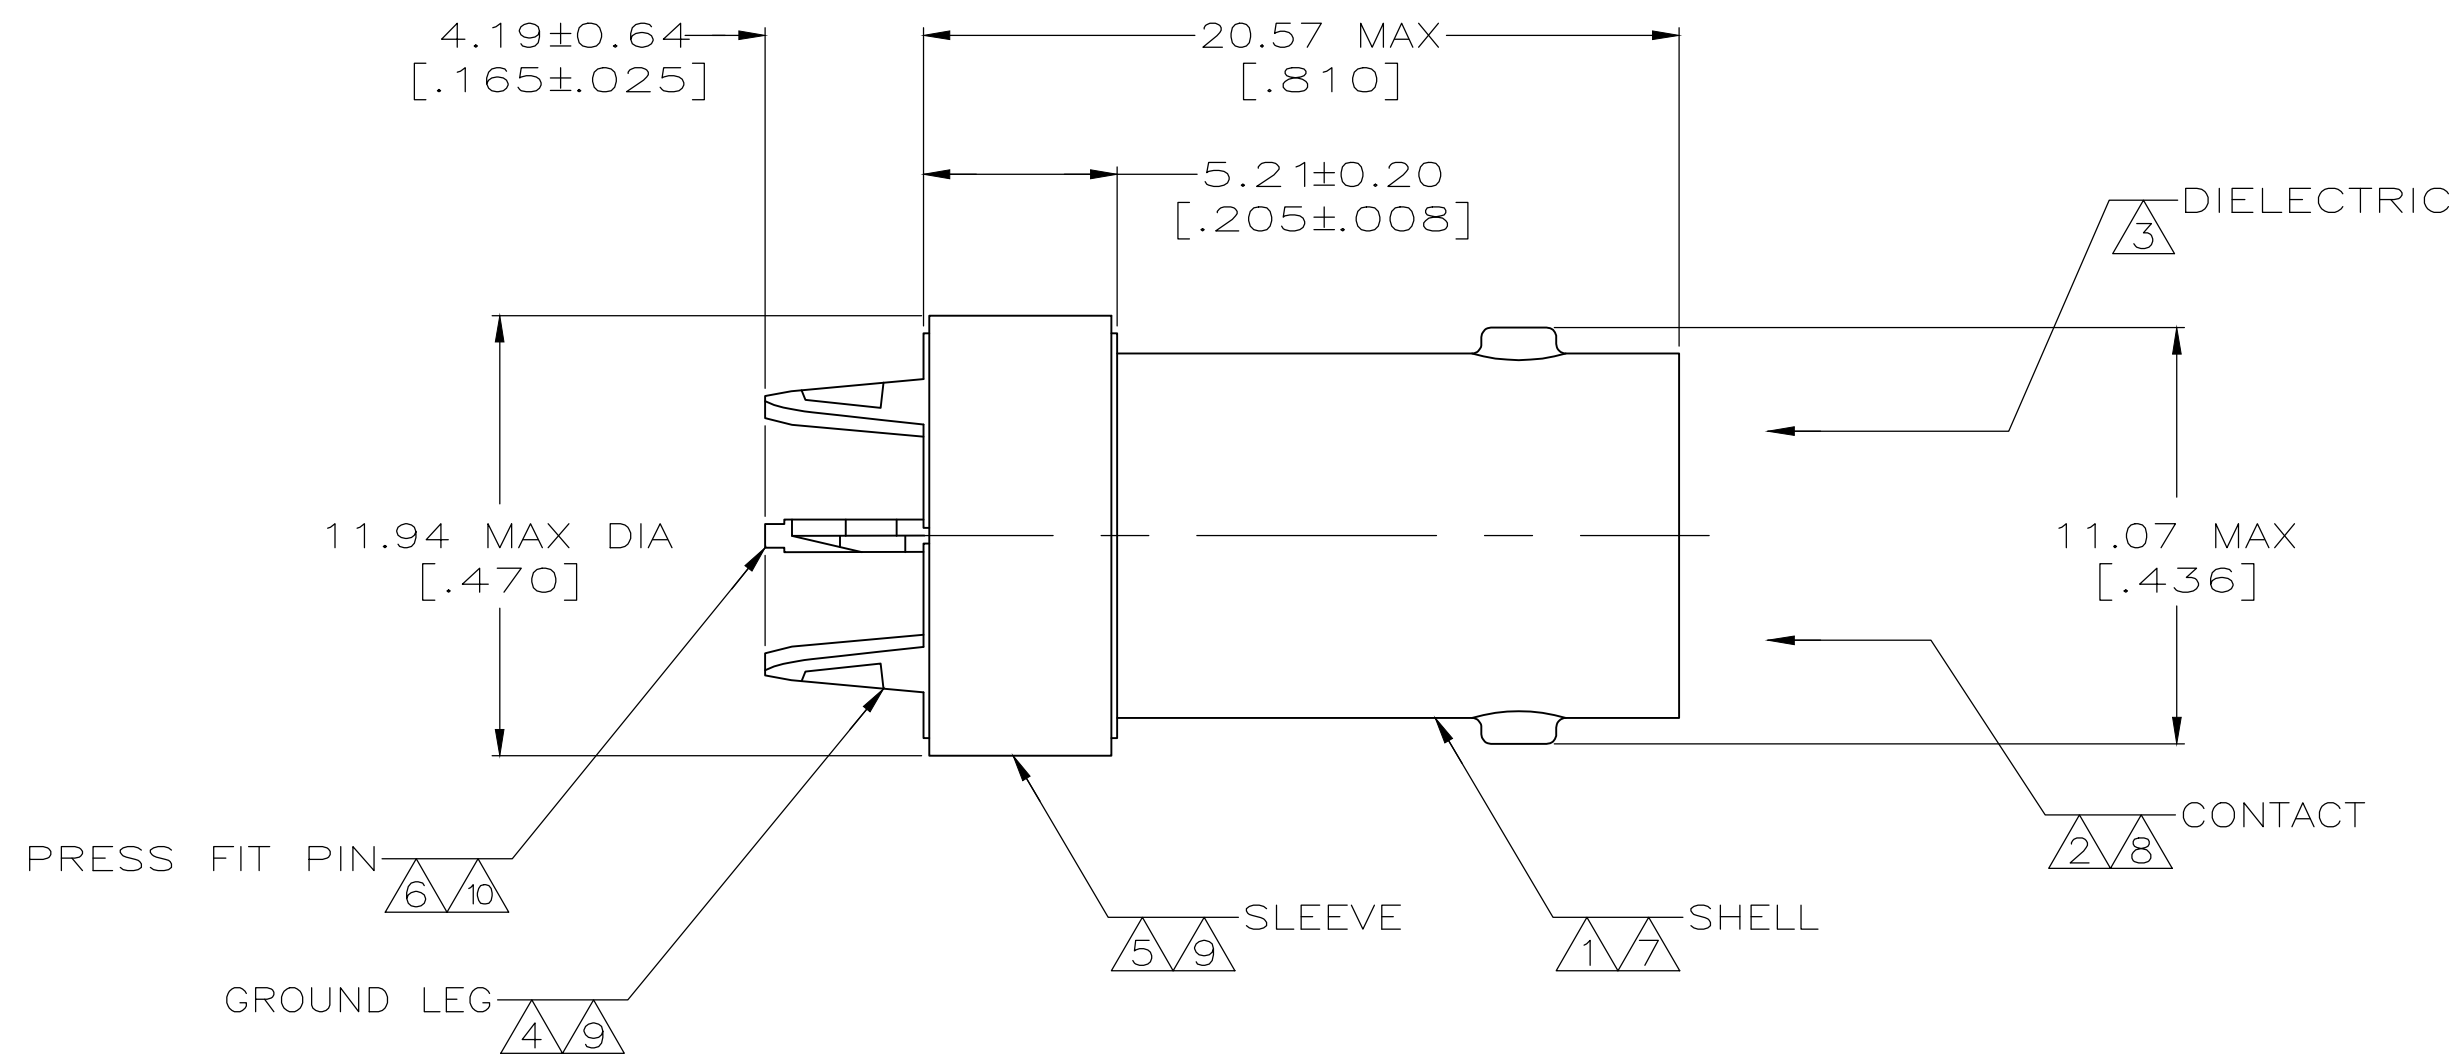

- 1 ZINC PER QQ-Z-363.
- 2 BERYLLIUM COPPER PER ASTM-B-643
- 3 PTFE PER MIL-P-19468.
- 4 COPPER-IRON ALLOY PER ASTM-B-465.
- 5 COPPER PER QQ-C-576.
- 6 COPPER ALLOY PER ASTM-B-122.
- 7 NICKEL PLATE PER QQ-N-290  
3.81µm [.000150] MINIMUM THICK.
- 8 GOLD PLATE PER MIL-G-45204  
0.20µm [.000008] MINIMUM THICK.
- 9 TIN PLATE PER ASTM-B-545,  
2.54 µm [.000100] MIN THICK.
- 10 GOLD PLATE PER MIL-G-45204
- 11 CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

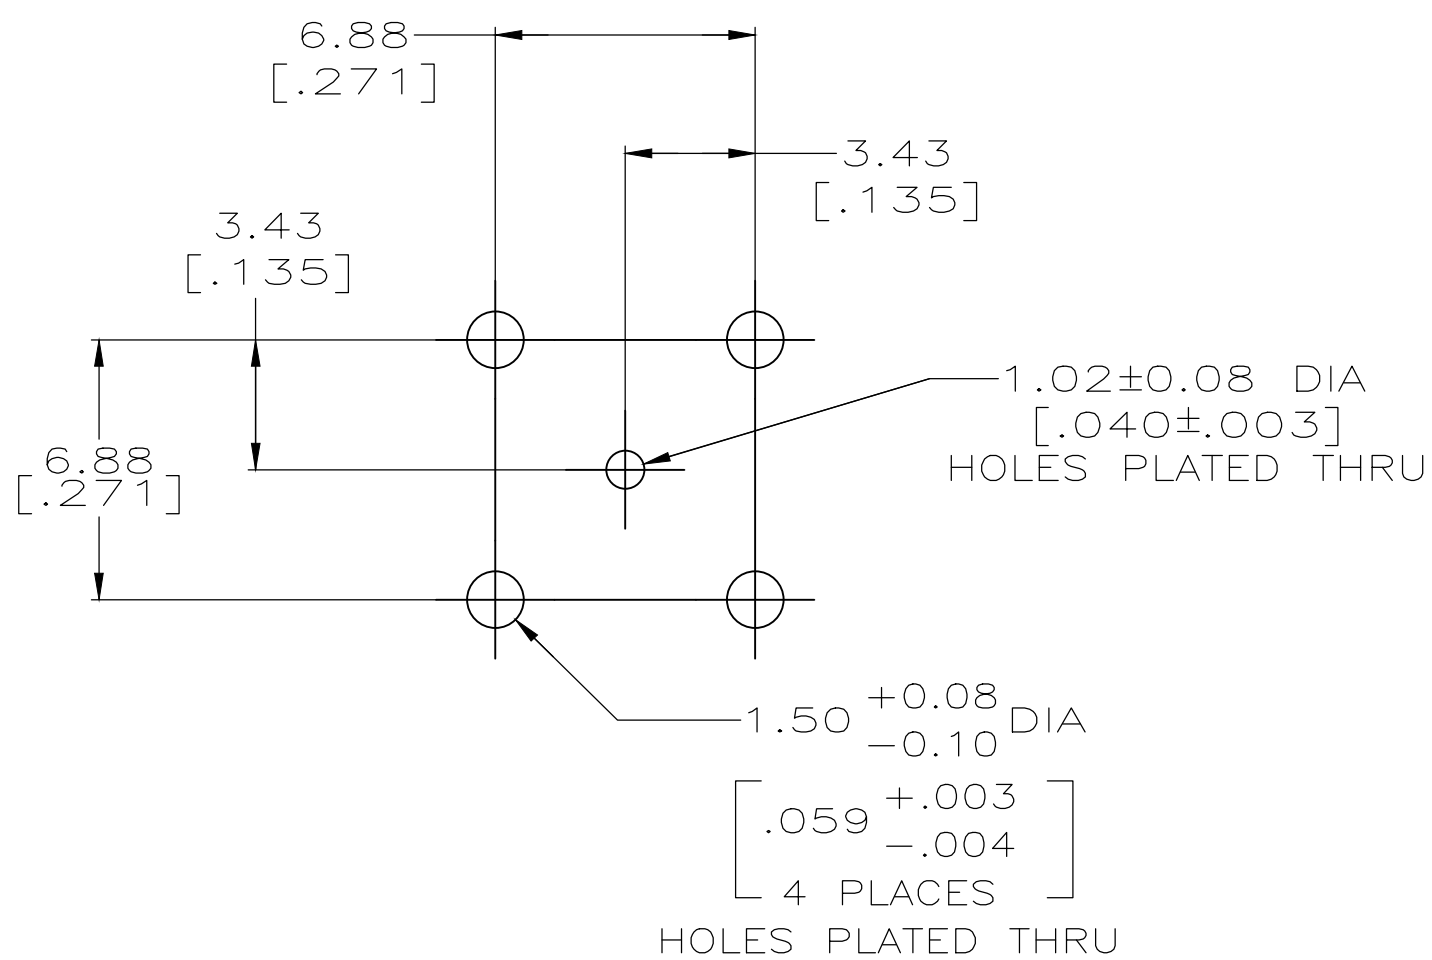

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - DOCK5 21APR2005	5222006-1 PART NUMBER	
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 21APR2005	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.05 [.002] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD J. LIPPERT 21APR2005	NAME JACK, PCB, HIGH RETENTION PRESS FIT, 50 OHM, BNC	
MATERIAL SEE NOTES 1-6		FINISH SEE NOTES 7-10	PRODUCT SPEC 108-12103	RESTRICTED TO -
		APPLICATION SPEC 114-12001	SIZE A2	CAGE CODE 00779
		WEIGHT 0.000000	DRAWING NO C-5222006	SCALE 5:1
		CUSTOMER DRAWING	SHEET 1 of 1	REV B1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)