
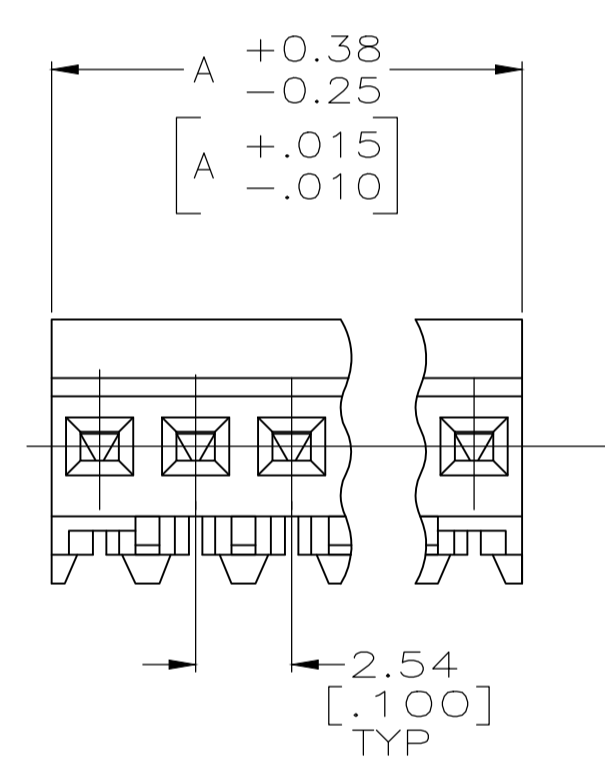
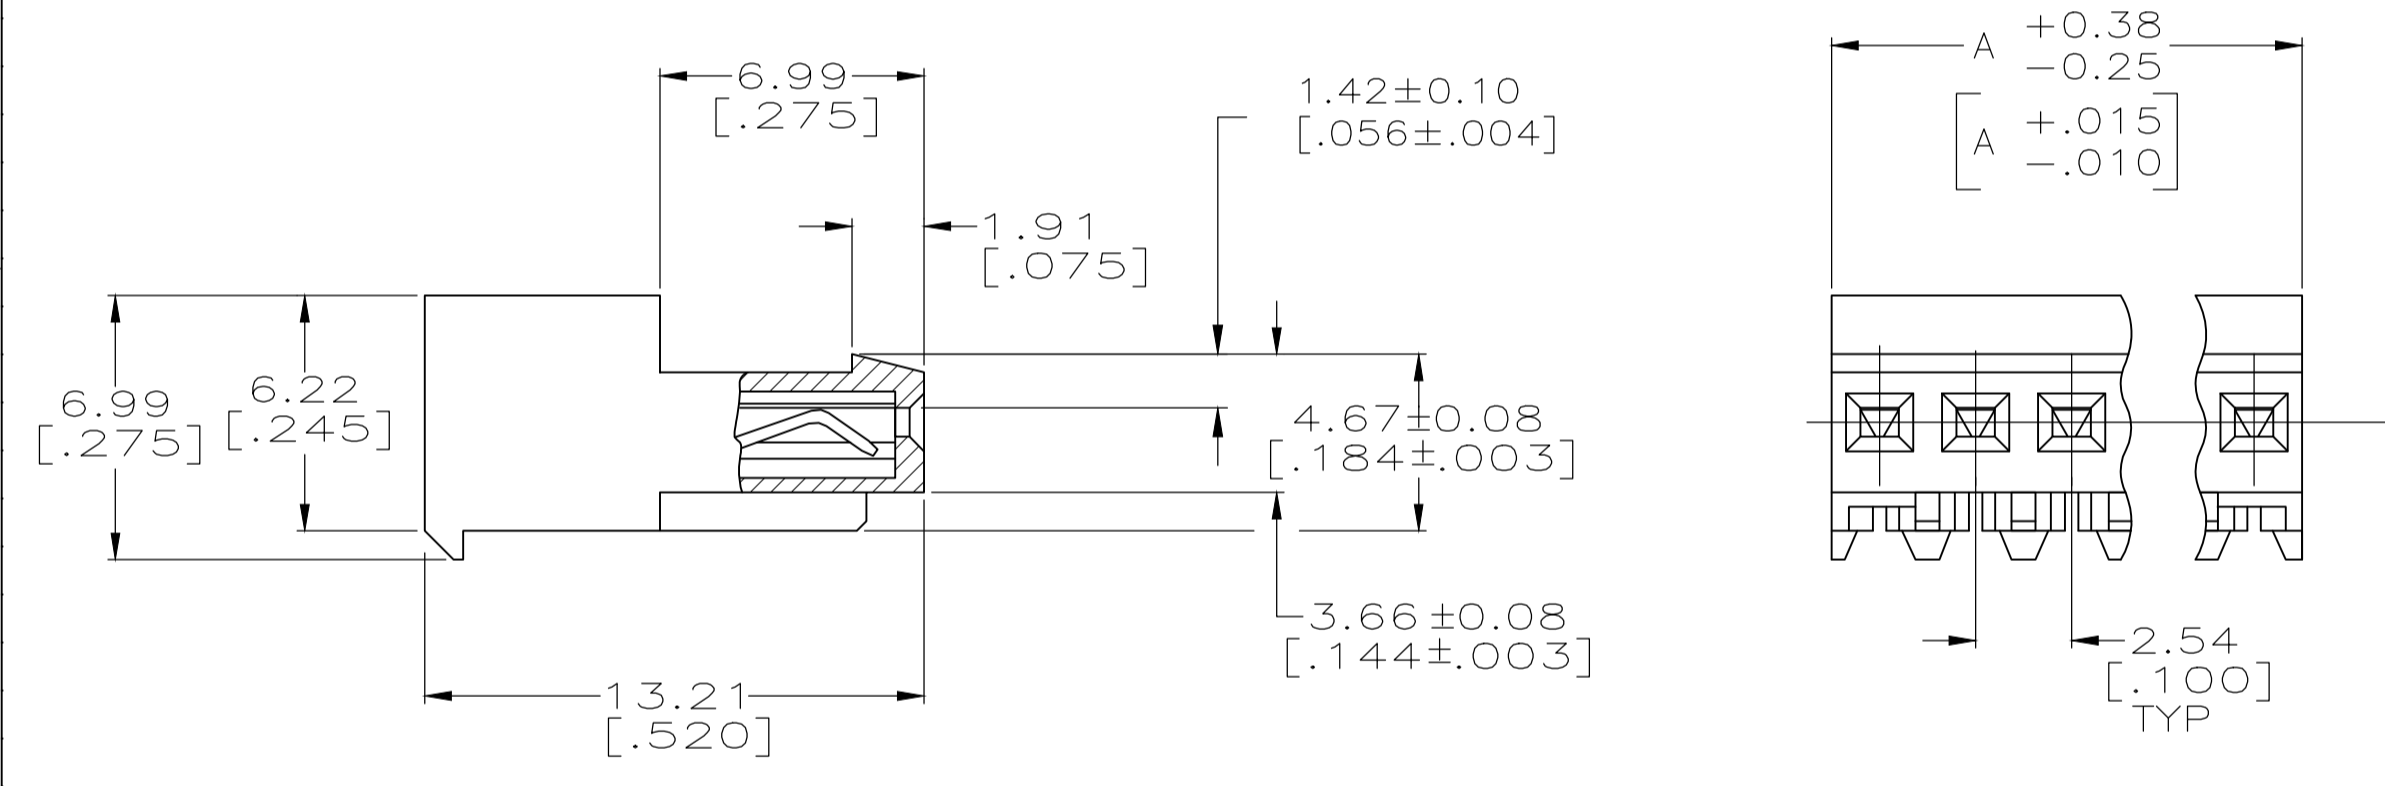


- 1 MATERIAL: CONNECTOR-NYLON UL94V-2 (BLUE).
CONTACTS-0.30 [.012] THICK COPPER ALLOY
0.00038 [.000015] GOLD OR 0.00038 [.000015]
TOTAL GOLD FLASH OVER PALLADIUM NICKEL,
PER TE CONNECTIVITY'S DISCRETION, IN CONTACT
AREA WITH MATTE TIN-LEAD FOR 641192-2 THRU
2-641192-8, MATTE WHISKER MITIGATED TIN FOR
3-641192-2 THRU 5-641192-8 OVER NICKEL
UNDERPLATE.
- 2 CONTACTS ACCEPT 26 AWG WIRE WITH 1.52 [.060] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

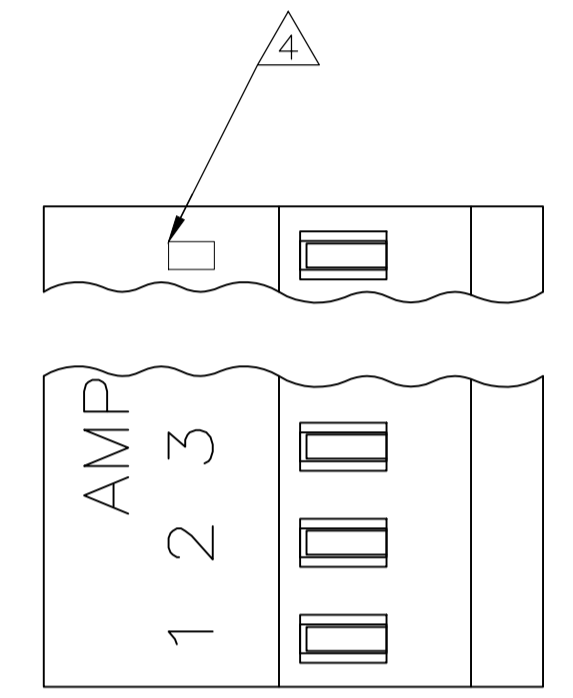

| | | | |
|--------------|----------------|------------|------------|
| LEAD FREE | 71.12 [.2.800] | 28 | 5-641192-8 |
| | 66.04 [.2.600] | 27 | 5-641192-7 |
| | 63.50 [.2.500] | 26 | 5-641192-6 |
| | 63.50 [.2.500] | 25 | 5-641192-5 |
| | 60.96 [.2.400] | 24 | 5-641192-4 |
| | 58.42 [.2.300] | 23 | 5-641192-3 |
| | 55.88 [.2.200] | 22 | 5-641192-2 |
| | 53.34 [.2.100] | 21 | 5-641192-1 |
| | 50.80 [.2.000] | 20 | 5-641192-0 |
| | 48.26 [.1.900] | 19 | 4-641192-9 |
| | 45.72 [.1.800] | 18 | 4-641192-8 |
| | 43.18 [.1.700] | 17 | 4-641192-7 |
| | 40.64 [.1.600] | 16 | 4-641192-6 |
| | 38.10 [.1.500] | 15 | 4-641192-5 |
| | 35.56 [.1.400] | 14 | 4-641192-4 |
| | 33.02 [.1.300] | 13 | 4-641192-3 |
| | 30.48 [.1.200] | 12 | 4-641192-2 |
| | 27.94 [.1.100] | 11 | 4-641192-1 |
| | 25.40 [.1.000] | 10 | 4-641192-0 |
| | 22.86 [.900] | 9 | 3-641192-9 |
| 20.32 [.800] | 8 | 3-641192-8 | |
| 17.78 [.700] | 7 | 3-641192-7 | |
| 15.24 [.600] | 6 | 3-641192-6 | |
| 12.70 [.500] | 5 | 3-641192-5 | |
| 10.16 [.400] | 4 | 3-641192-4 | |
| 7.62 [.300] | 3 | 3-641192-3 | |
| 5.08 [.200] | 2 | 3-641192-2 | |
| DIM A | NO.OF POSN | ASSEMBLY | |

△ SUPERCEDED BY 5-641192-8
 △ SUPERCEDED BY 5-641192-7
 △ SUPERCEDED BY 5-641192-6
 △ SUPERCEDED BY 5-641192-5
 △ SUPERCEDED BY 5-641192-4
 △ SUPERCEDED BY 5-641192-3
 △ SUPERCEDED BY 5-641192-2
 △ SUPERCEDED BY 5-641192-1

 △ SUPERCEDED BY 4-641192-9
 △ SUPERCEDED BY 4-641192-8
 △ SUPERCEDED BY 4-641192-7
 △ SUPERCEDED BY 4-641192-6
 △ SUPERCEDED BY 4-641192-5
 △ SUPERCEDED BY 4-641192-4
 △ SUPERCEDED BY 4-641192-3
 △ SUPERCEDED BY 4-641192-2
 △ SUPERCEDED BY 4-641192-1
 △ SUPERCEDED BY 4-641192-0

 △ SUPERCEDED BY 3-641192-8

| | | | |
|--------------|----------------|----------|-----------------------|
| LEAD FREE | 71.12 [.2.800] | 28 | 2-641192-8 |
| | 66.04 [.2.600] | 27 | 2-641192-7 |
| | 63.50 [.2.500] | 26 | 2-641192-6 |
| | 63.50 [.2.500] | 25 | 2-641192-5 |
| | 60.96 [.2.400] | 24 | 2-641192-4 |
| | 58.42 [.2.300] | 23 | 2-641192-3 |
| | 55.88 [.2.200] | 22 | 2-641192-2 |
| | 53.34 [.2.100] | 21 | 2-641192-1 |
| | 50.80 [.2.000] | 20 | 2-641192-0 |
| | 48.26 [.1.900] | 19 | 1-641192-9 |
| | 45.72 [.1.800] | 18 | 1-641192-8 |
| | 43.18 [.1.700] | 17 | 1-641192-7 |
| | 40.64 [.1.600] | 16 | 1-641192-6 |
| | 38.10 [.1.500] | 15 | 1-641192-5 |
| | 35.56 [.1.400] | 14 | 1-641192-4 |
| | 33.02 [.1.300] | 13 | 1-641192-3 |
| | 30.48 [.1.200] | 12 | 1-641192-2 |
| | 27.94 [.1.100] | 11 | 1-641192-1 |
| | 25.40 [.1.000] | 10 | 1-641192-0 |
| | 22.86 [.900] | 9 | 641192-9 |
| 20.32 [.800] | 8 | 641192-8 | |
| 17.78 [.700] | 7 | 641192-7 | |
| 15.24 [.600] | 6 | 641192-6 | |
| 12.70 [.500] | 5 | 641192-5 | |
| 10.16 [.400] | 4 | 641192-4 | |
| 7.62 [.300] | 3 | 641192-3 | |
| 5.08 [.200] | 2 | 641192-2 | |
| DIM A | NO.OF POSN | ASSEMBLY | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±
 1 PLC ±
 2 PLC ± 0.13 [.005]
 3 PLC ±
 4 PLC ±
 ANGLES ±

MATERIAL: △
 FINISH: △

THIS DRAWING IS A CONTROLLED DOCUMENT.
 S. HOOVER 20-DEC-2004
 C. BOSSI 20-DEC-2004
 D. BOSSI 20-DEC-2004
 NAME: MTA .100 CONNECTOR ASSEMBLY 26 AWG, STANDARD
 PRODUCT SPEC: 108-1050
 APPLICATION SPEC: 114-1019
 SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 641192
 WEIGHT: CUSTOMER DRAWING
 SCALE: 5:1
 SHEET: 1 OF 1
 REV: W

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)