


REV. C
DCO 300783

TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	95 OHMS $\pm 10\%$
NOMINAL VOLTAGE	12 VDC
MUST OPERATE	6.5 VDC MAX.
MUST RELEASE	3.3 VDC MAX., 0.75 VDC MIN.

ENVIRONMENT:	
VIBRATION	70 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C
NOTES:	OPERATE, RELEASE 5 MS MAX.
	CONTACT STABILIZATION 2.5 MS MAX.
	CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

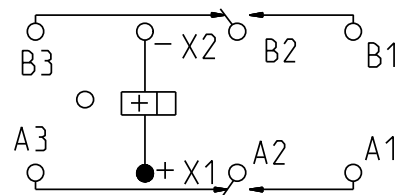

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.	
100,000 OPERATIONS	

DR. B.D. 11MAR2008 CK. J.M.B. 3/17/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/1-010M
CUST. NO. REV.

TE NUMBER
2-1617758-6

CII PART NUMBER
FCB-205-0110M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)