


REV. 2

DCO 142340

COIL: @ 25°C	
RESISTANCE	210 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX. 0.6 VDC MIN.

CUSTOMER DATA SHEET

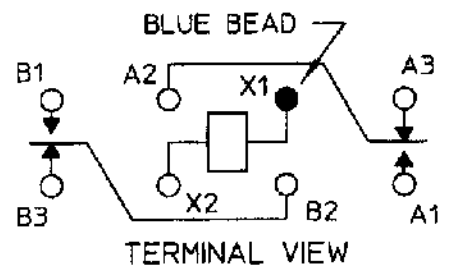


ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. R.B. 3/21/97 CK. *Vio/Olson*



CUST. QPL
CUST. NO. M39016/13-056M REV.

"3SBC" RELAY

3SBC1517A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)