
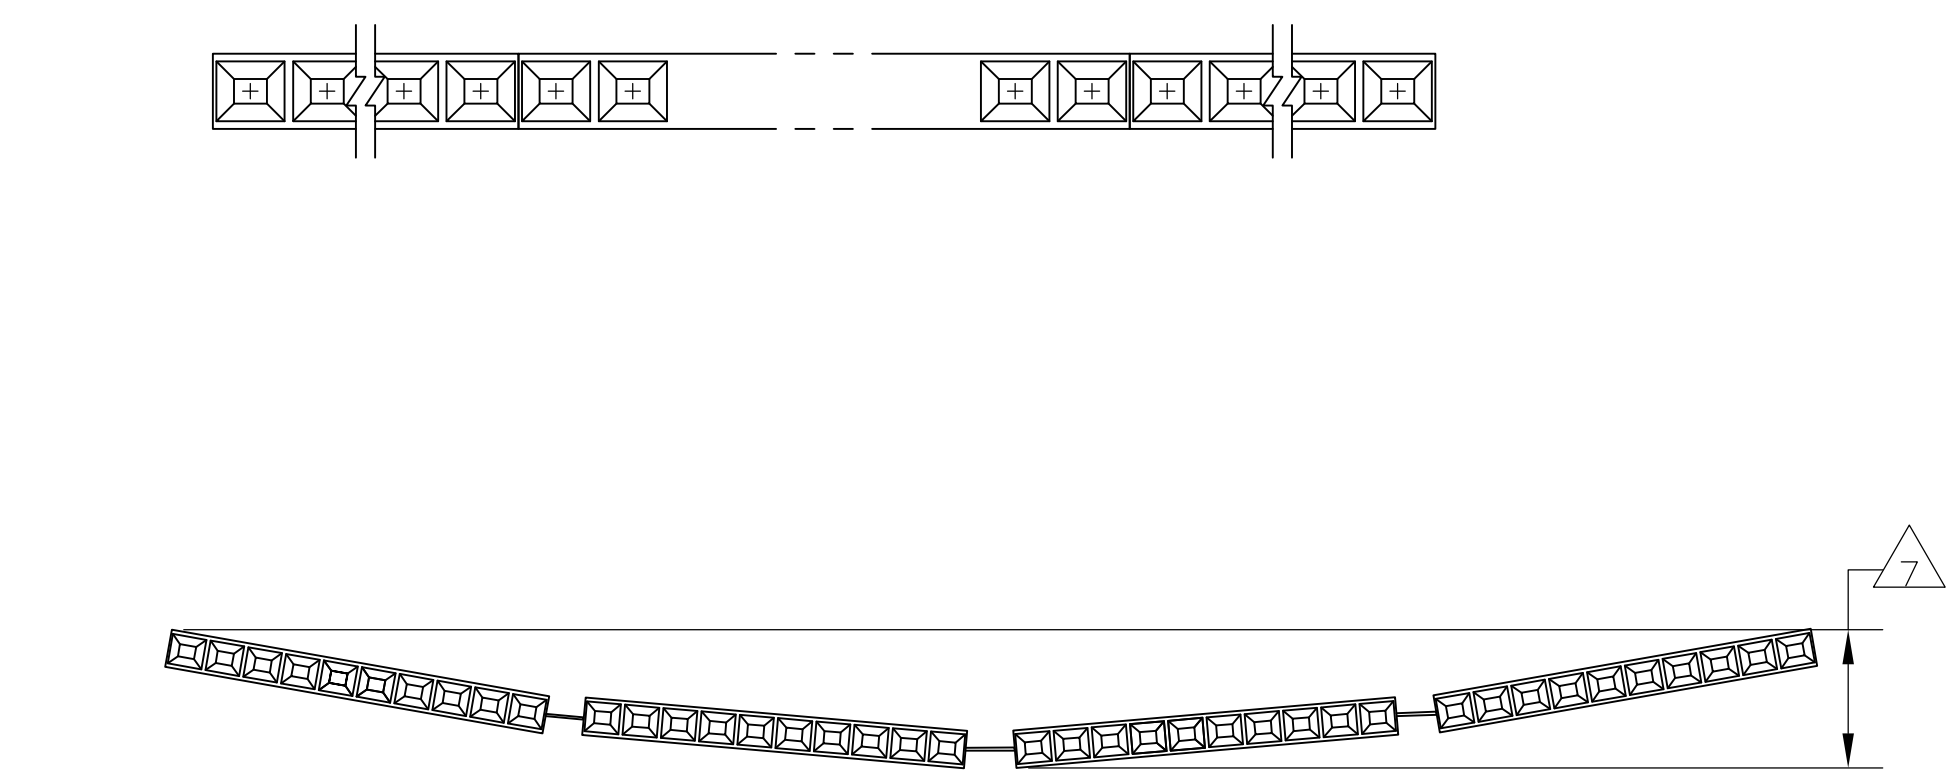


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
K		EC 0G3C 0760 04	24DEC04	BSV	JLG
K1		REVISED PER ECO-09-020689	28AUG09	KK	AEG

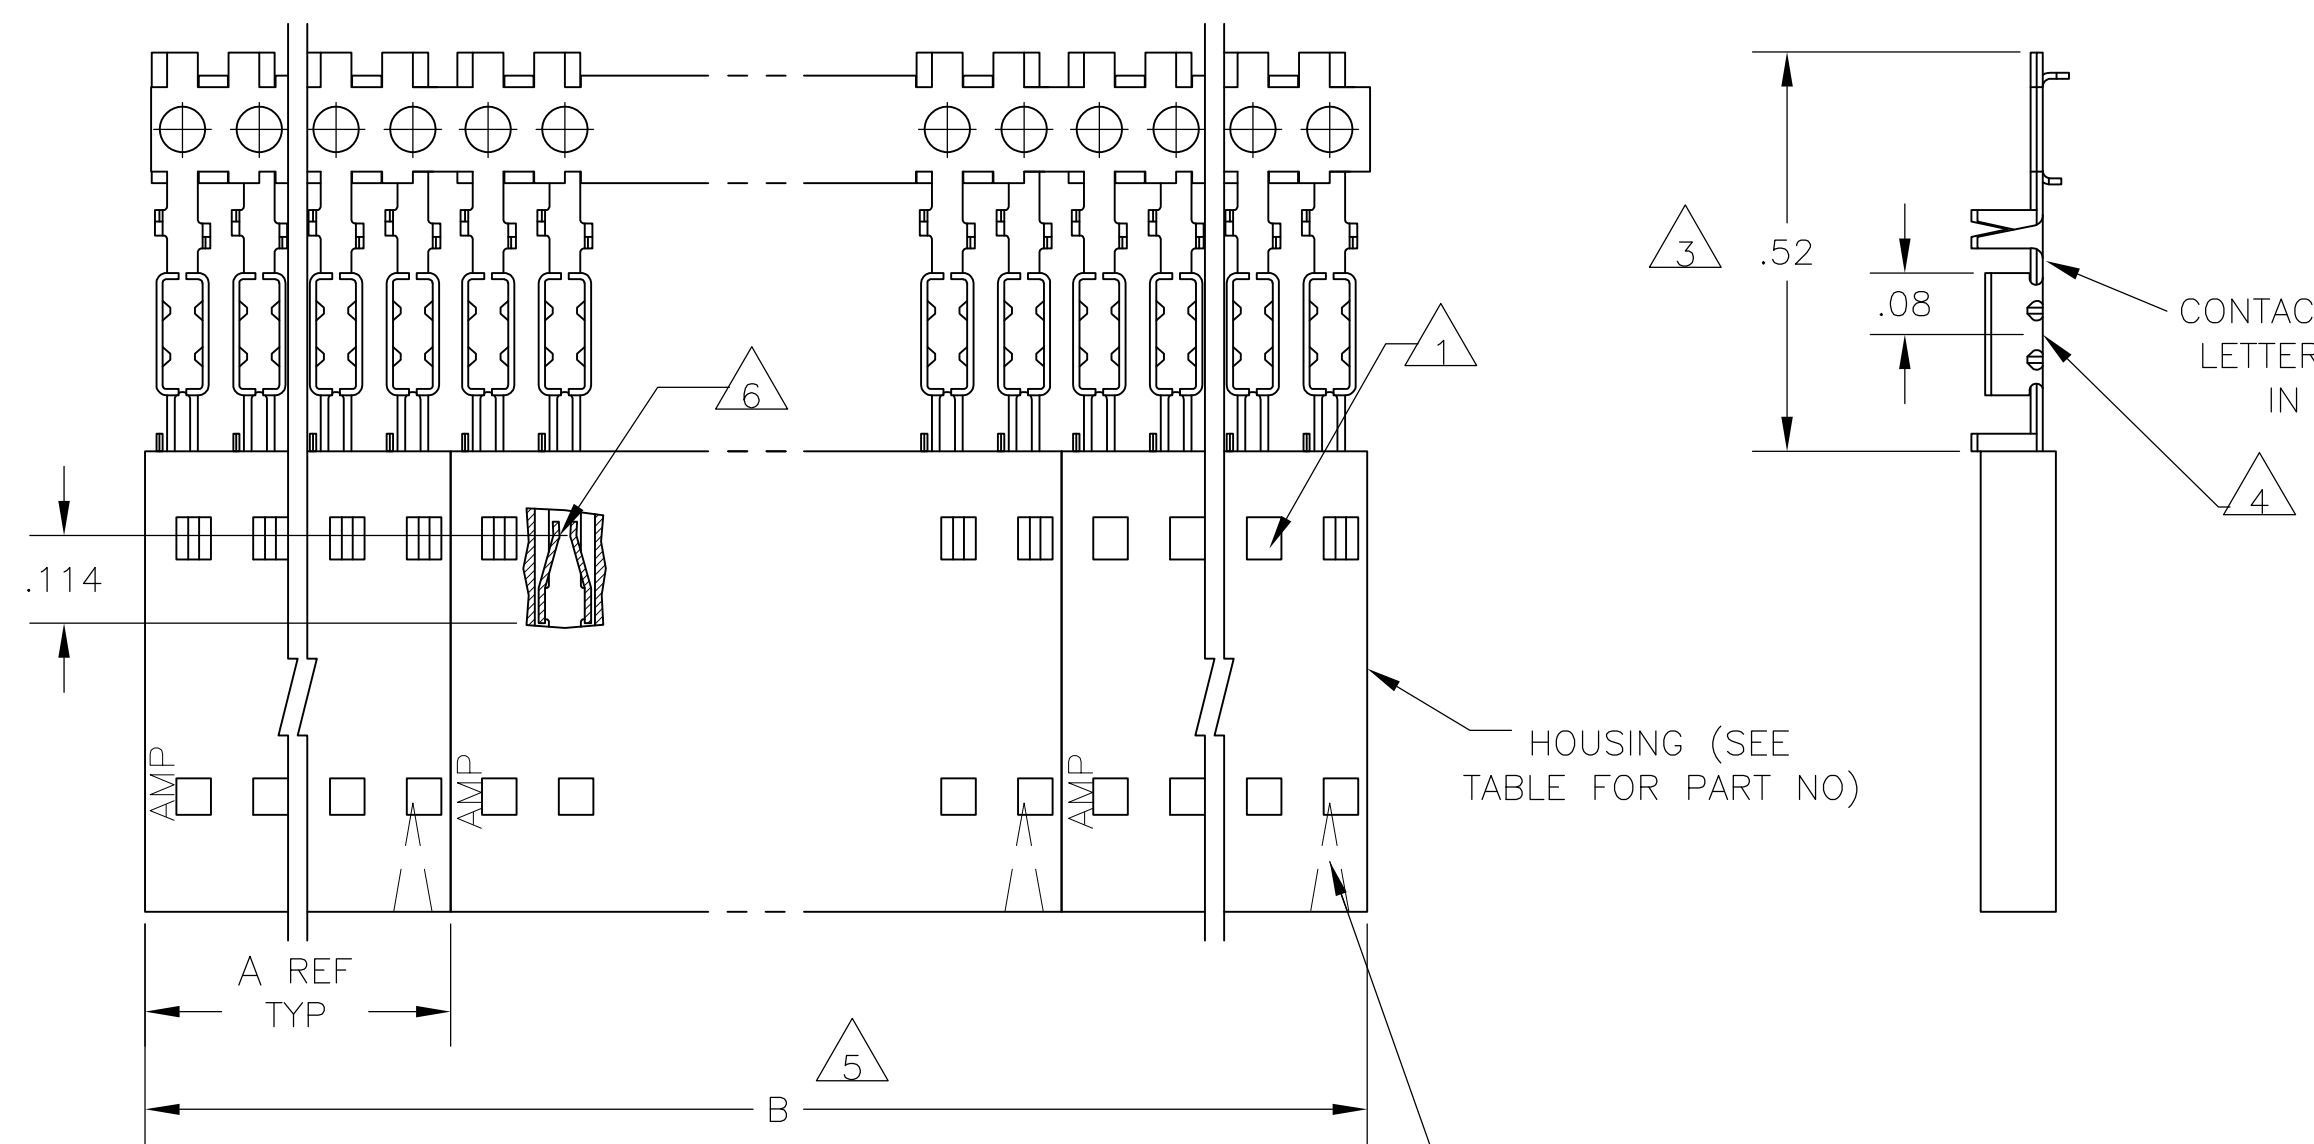

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 8 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	9	2	2.40	1.198	1-103688-1	12	6-104438-1
	9	2	2.20	1.098	1-103688-0	11	6-104438-0
	9	2	2.00	.998	103688-9	10	5-104438-9
	9	2	1.80	.898	103688-8	9	5-104438-8
	9	2	1.60	.798	103688-7	8	5-104438-7
	9	2	1.40	.698	103688-6	7	5-104438-6
	9	4	2.39	.598	103688-5	6	5-104438-5
OBSOLETE	9	4	1.99	.498	103688-4	5	5-104438-4
	9	5	1.99	.398	103688-3	4	5-104438-3
	9	5	1.49	.298	103688-2	3	5-104438-2
	9	10	1.98	.198	103688-1	2	5-104438-1
	8	2	2.40	1.198	1-103688-1	12	1-104438-1
	8	2	2.20	1.098	1-103688-0	11	1-104438-0
	8	2	2.00	.998	103688-9	10	104438-9
	8	2	1.80	.898	103688-8	9	104438-8
	8	2	1.60	.798	103688-7	8	104438-7
	8	2	1.40	.698	103688-6	7	104438-6
OBSOLETE	8	4	2.39	.598	103688-5	6	104438-5
	8	4	1.99	.498	103688-4	5	104438-4
	8	5	1.99	.398	103688-3	4	104438-3
	8	5	1.49	.298	103688-2	3	104438-2
	8	10	1.98	.198	103688-1	2	104438-1
	PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

EXAMPLE: STRIP ASSEMBLY SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M PASTAL	7-12-88	tyco electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608
		CHK	P deJONG	7-12-88	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME		
INCHES	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -	PRODUCT SPEC		RCPT ASSY AMPMODU MTE, SINGLE ROW, .100 CL, HIGH, PRESSURE FOR #26-30 AWG WIRE SIZE, STRIP FORM	
		APPLICATION SPEC		SIZE	RESTRICTED TO
		FINISH		CAGE CODE	DRAWING NO
		SEE TABLE		A2	00779 C-104438
MAKING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK CONTACTS: PHOS BRONZE		WEIGHT		SCALE 4:1 SHEET 1 OF 1 REV K1	
		CUSTOMER DRAWING			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)