


REV. 0
DCO 14991

COIL: @ 25°C	
RESISTANCE	200 OHMS ± 10%
NOMINAL VOLTAGE	12.6 VDC
MUST OPERATE	6.8 VDC
MUST RELEASE	0.74 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

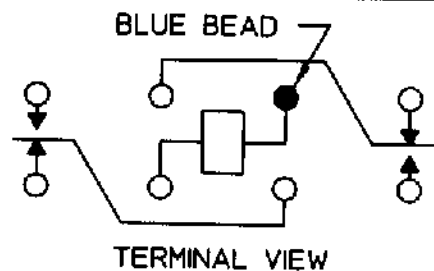

CONTACT RATING: LOW LEVEL TO
3 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MINIMUM

DR. R.B. 12/17/98 CK 5/3/00 JRB



CUST. C. I. I.
CUST. NO. STANDARD

TYPE "FW" RELAY

FW1201D00

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)