
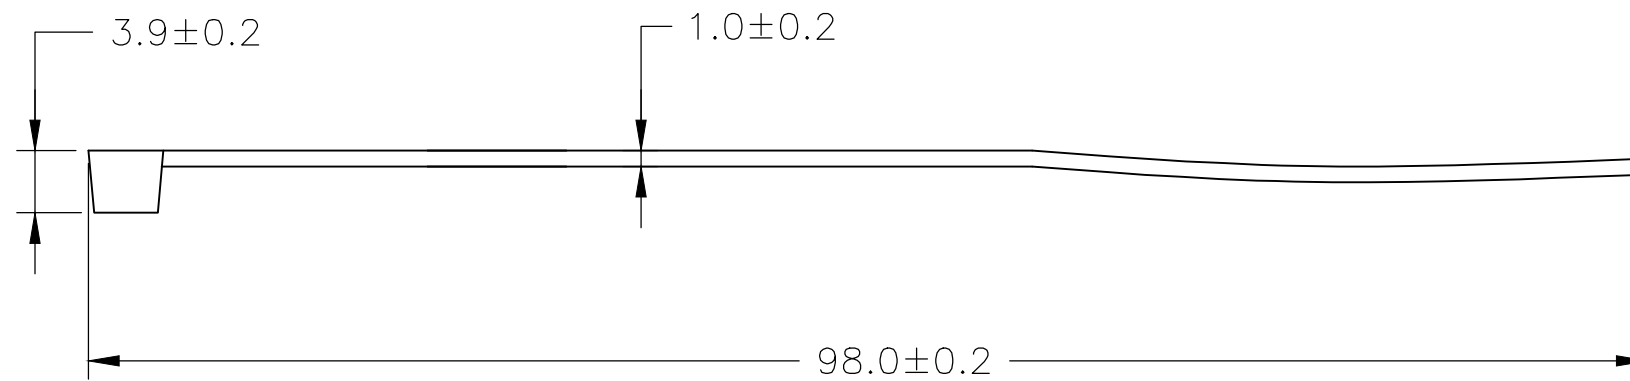


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECR-20-004823	01APR2020	GK	MN

NOTES:

- 1 RANGE: $\phi 21$ MAX.
- 2 MIN. TENSILE STRENGTH 82N.

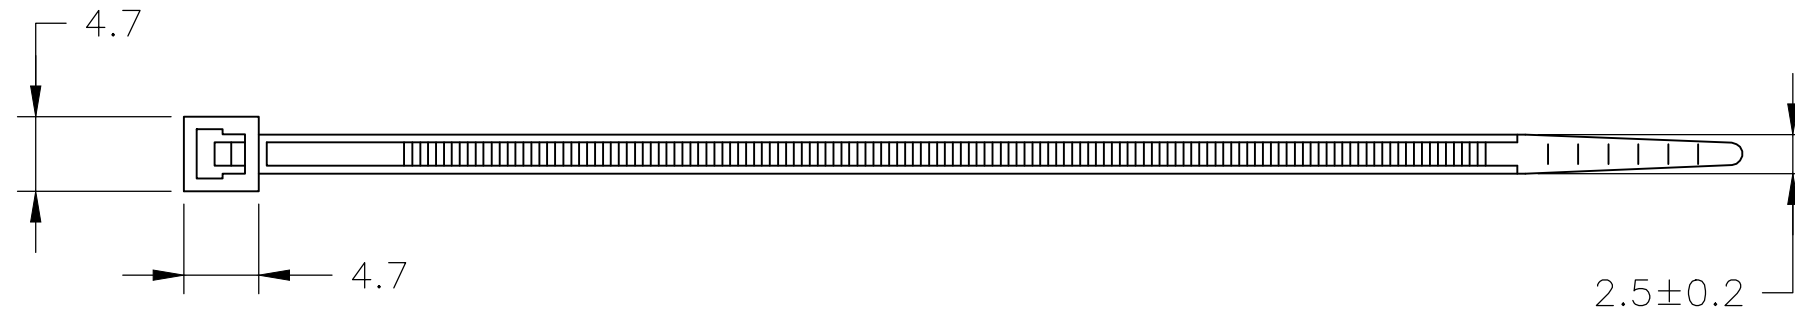

1000	BLACK	POLYAMIDE 6.6	4-160967-2
1000	NATURAL	POLYAMIDE 6.6	4-160967-1
100	BLACK	POLYAMIDE 6.6	2-160967-2
100	NATURAL	POLYAMIDE 6.6	2-160967-1
QTY	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01APR2020 GOPALAKRISHNA HV	STE TE Connectivity	
		CHK 01APR2020 GOPALAKRISHNA HV		
DIMENSIONS: mm		APVD 01APR2020 M. NUTTALL	NAME CABLE TIE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	-	
0 PLC ± -		APPLICATION SPEC	-	
1 PLC ± 0.4		WEIGHT	-	
2 PLC ± -		SIZE	CAGE CODE	DRAWING NO
3 PLC ± -		A3 00779		C-160967
4 PLC ± -		CUSTOMER DRAWING		RESTRICTED TO
ANGLES ± -		SCALE		SHEET
MATERIAL SEE TABLE		NTS		1 OF 1
FINISH SEE TABLE		REV		E

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)