
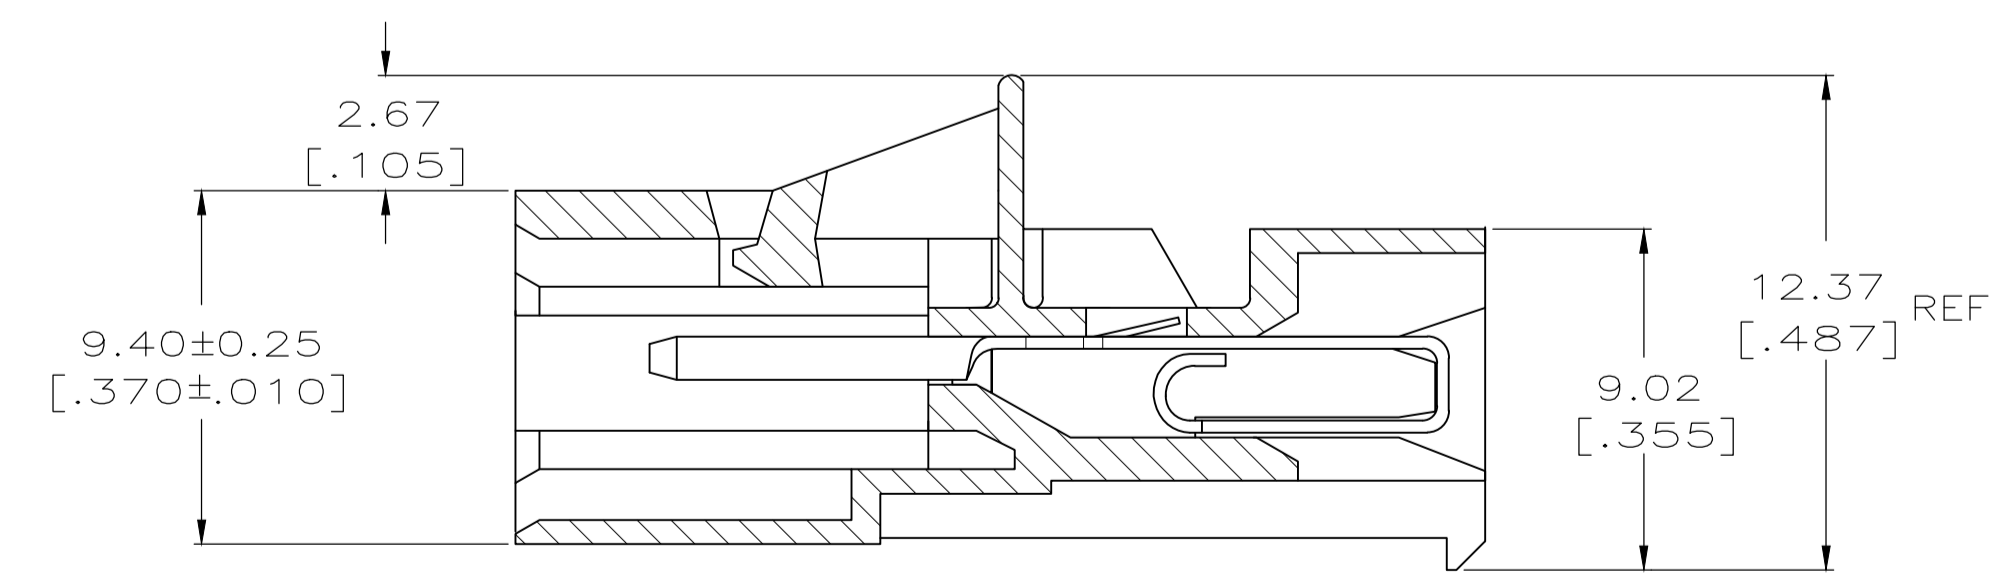
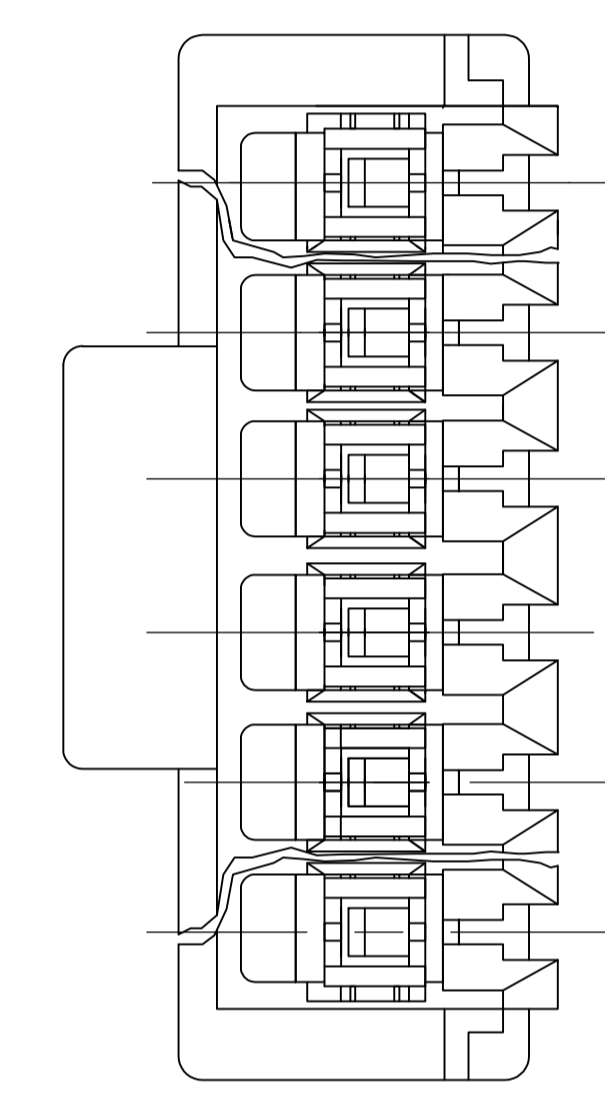
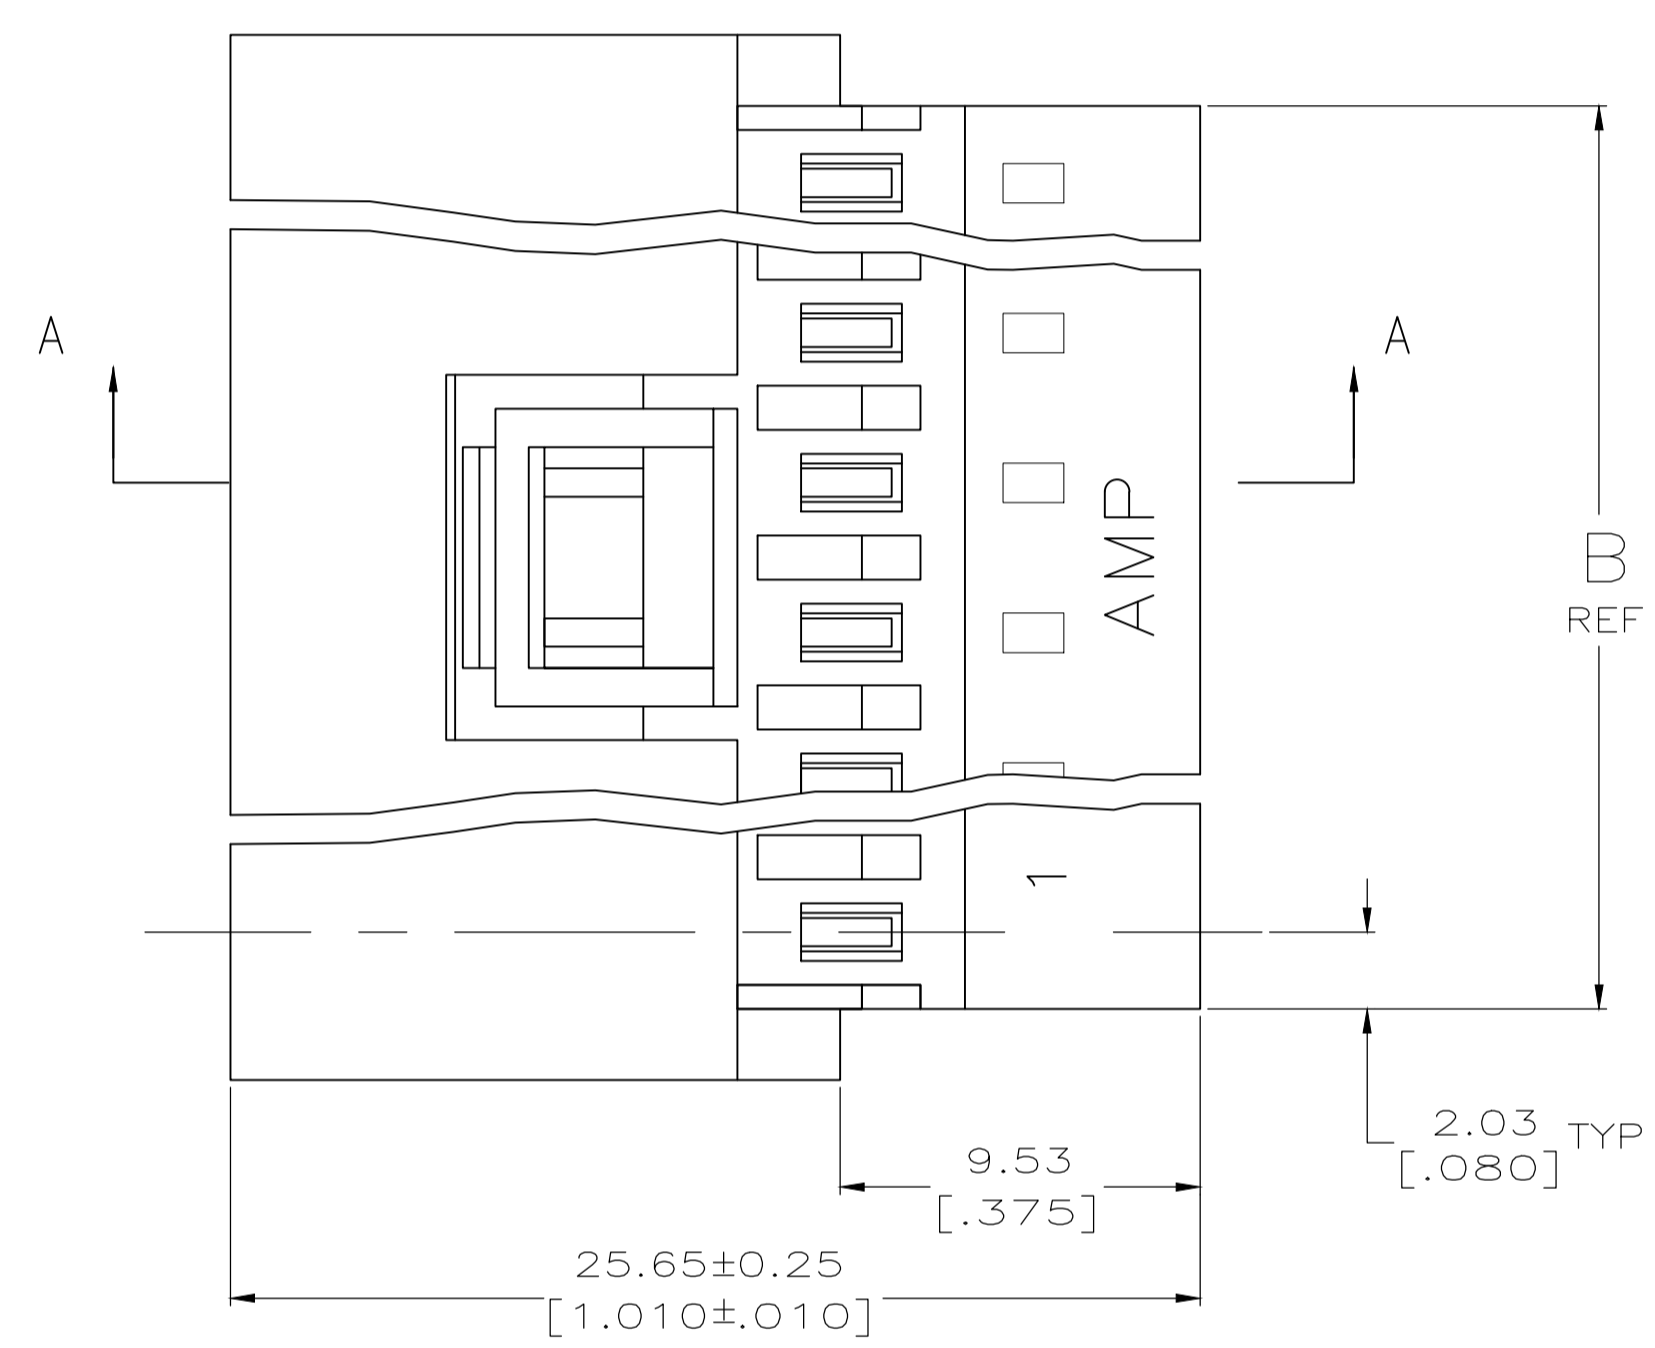


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
G		REVISED PER ECR-20-000808	26MAY2020	PC	SW		

- MATERIAL: CONNECTOR- NYLON UL94V-2 (ORANGE).
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00038 [.000015] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00030 [.000012] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
OR
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00038 [.000015] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00030 [.000012] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
- CONTACTS ACCEPT #18 AWG SOLID, FUSED STRANDED OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

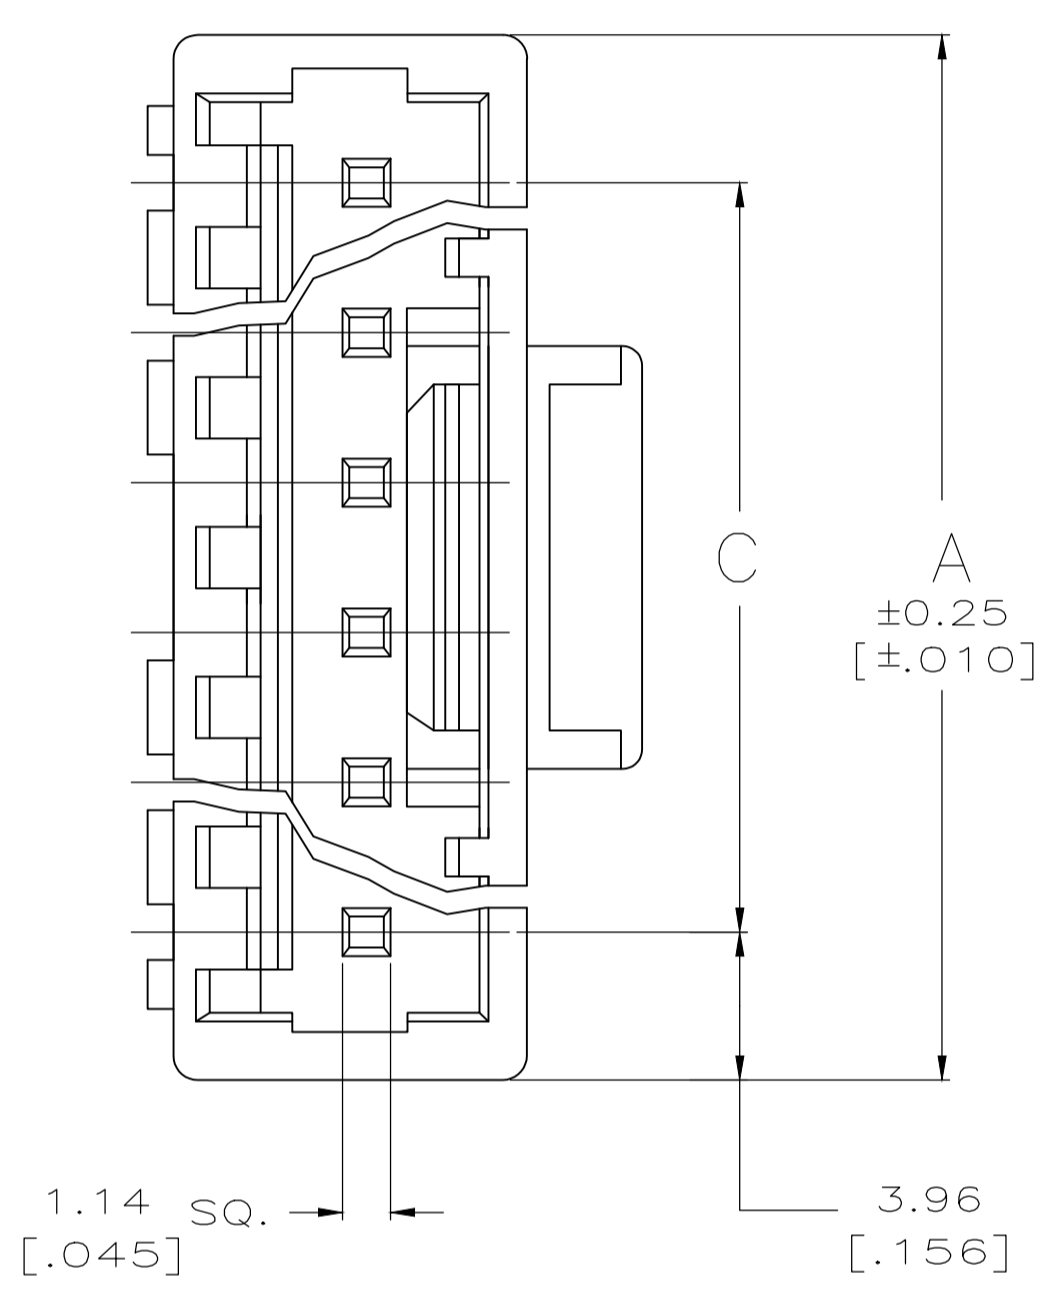

FINISH	C	B	A	NO. OF CIRCUITS	PART NUMBER	
TIN	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5	
TIN	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2	
TIN	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9	
TIN	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6	
TIN	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4	
TIN	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3	
TIN	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2	
SUPERCEDED	TIN-LEAD	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	1-647476-5
SUPERCEDED	TIN-LEAD	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
SUPERCEDED	TIN-LEAD	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	647476-9
SUPERCEDED	TIN-LEAD	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	647476-6
SUPERCEDED	TIN-LEAD	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	647476-4
SUPERCEDED	TIN-LEAD	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	647476-3
SUPERCEDED	TIN-LEAD	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	647476-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± .005
1 PLC	± .005
2 PLC	± 0.13 [.005]
3 PLC	± .005
4 PLC	± .005
ANGLES	± .005

MATERIAL: SEE NOTE 1

FINISH: SEE NOTE 1

WEIGHT: --

CUSTOMER DRAWING

DIN K. WHITAKER 09-NOV-2000
CHK D. ROSSI 09-NOV-2000
APVD --

NAME: MTA-156
PRODUCT SPEC: POSTED CONNECTOR ASSEMBLY, 18 AWG
APPLICATION SPEC: --

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 647476

RESTRICTED TO: --

SCALE: 5:1
SHEET: 1 OF 1
REV: G

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)