


| LOC | DIST | REV | REVISION RECORD | DATE | DWN | APVD |
|-----|------|-----|---------------------------|-----------|-----|------|
| GP | 00 | A | REVISED PER ECO-07-022535 | 16-Nov-07 | JDP | CWR |

- 1 MATERIAL: COPPER-NICKEL ALLOY
- 2 FINISH: .000050 MIN GOLD OVER .000050 MIN NICKEL IN MATING AREA
- 3 FINISH: .000100 MIN BRIGHT TIN-LEAD OVER .000050 MIN NICKEL IN MATING AREA

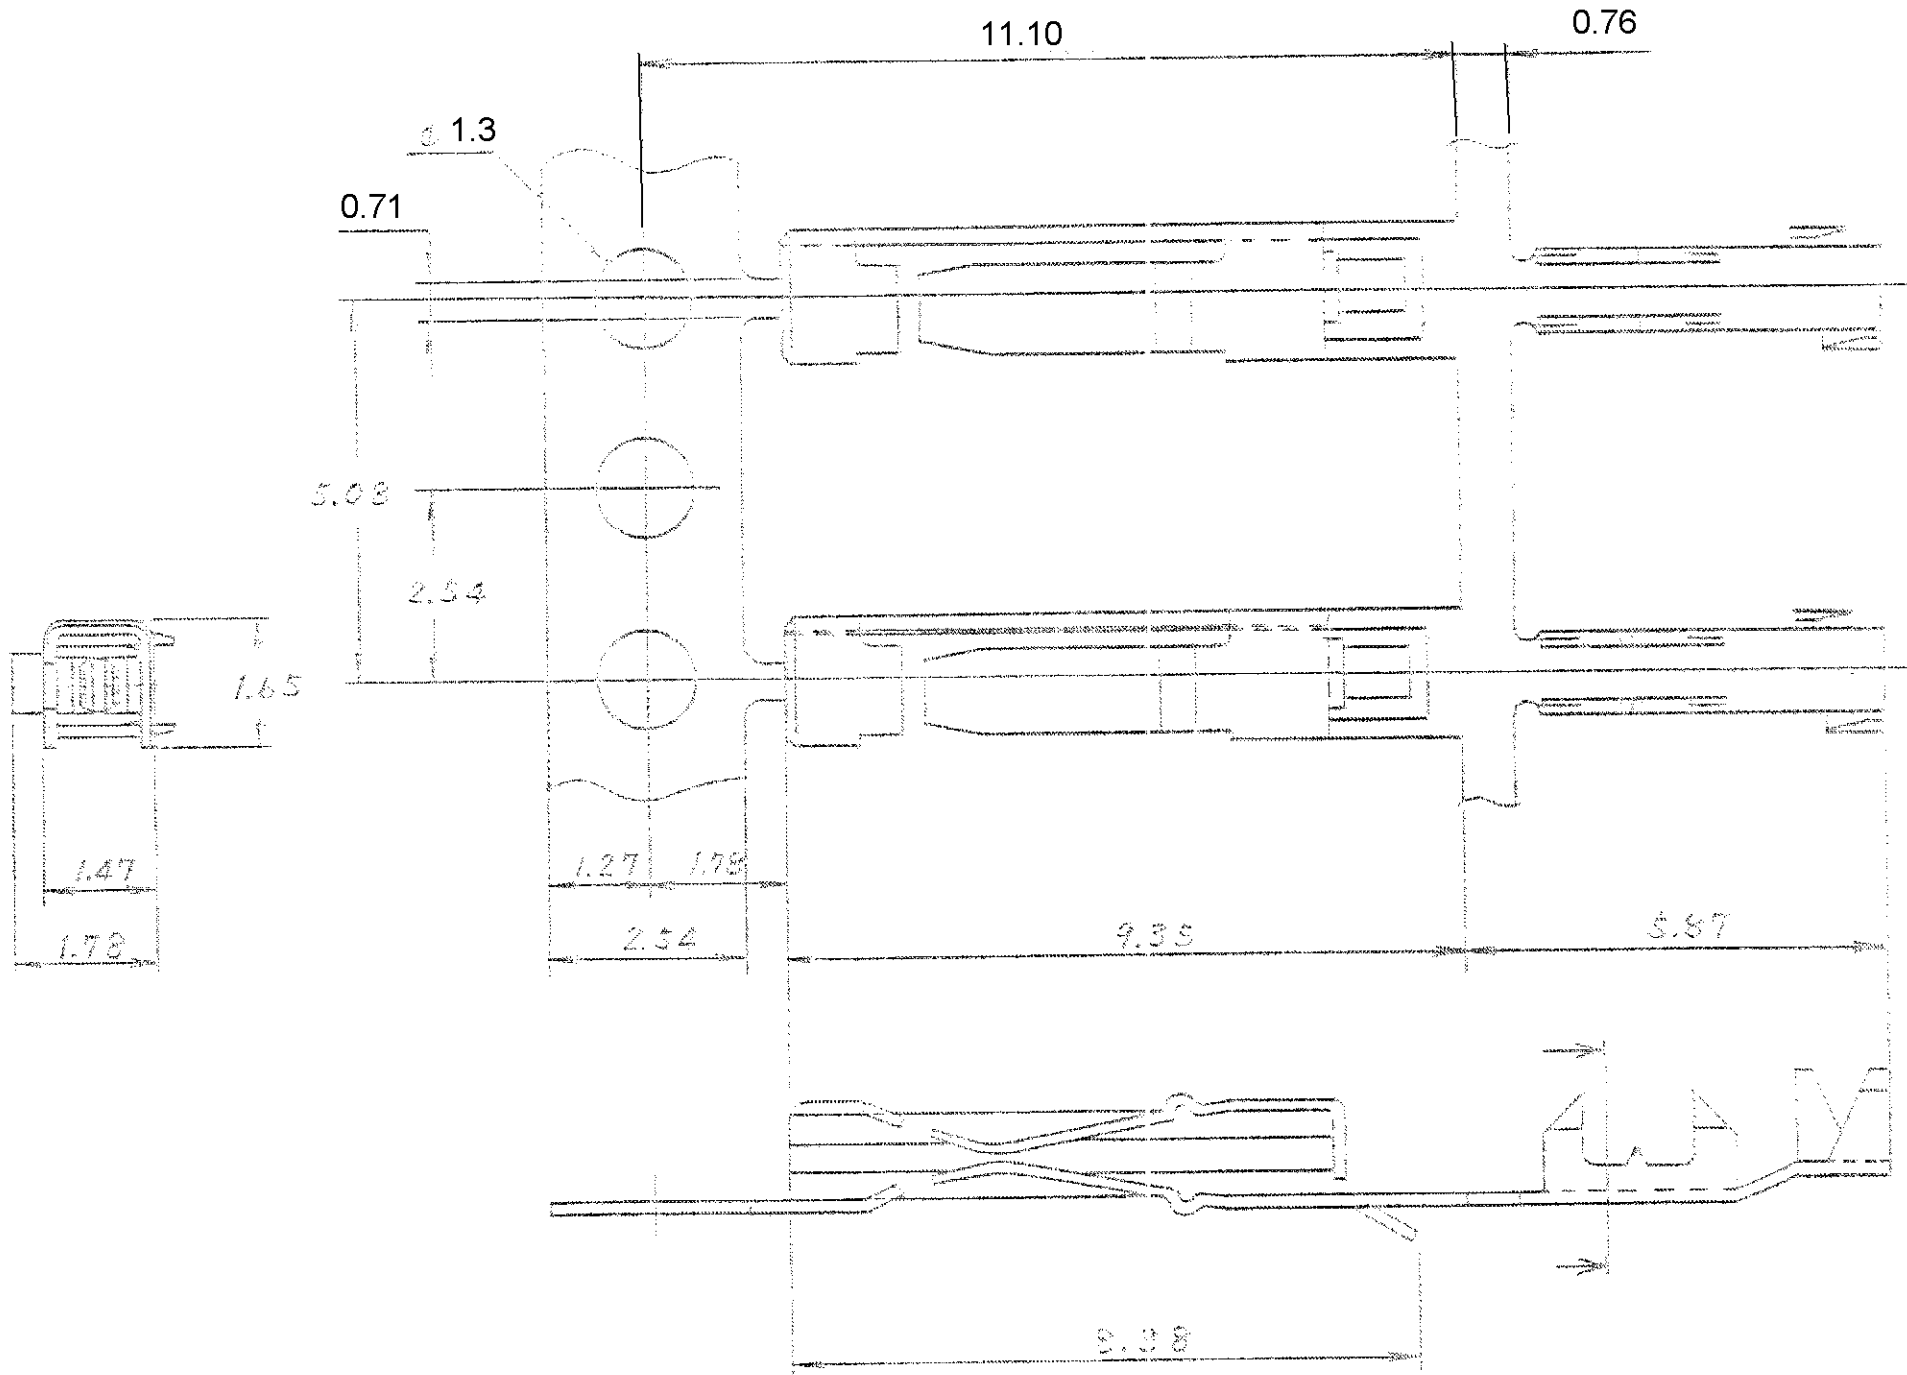

| PHYSICAL PROPERTIES | |
|--------------------------|-------------------|
| CONTACT RETENTION FORCE: | 44 N |
| INSERTION FORCE: | 1.4 N PER CONTACT |
| EXTRACTION FORCE: | 1 N PER CONTACT |
| ELECTRICAL PROPERTIES | |
| CURRENT RATING: | 3 AMPS PER PIN |
| ENVIRONMENTAL PROPERTIES | |
| TEMPERATURE RATING: | -40°C TO +105°C |

| | | |
|---------------|----------------------------------|-----------------|
| 3 | FP-2T | 1437249-8 |
| 2 | FP-2G | 1437249-7 |
| FINISH | T&B CATALOG P/N (REF) | T.E. P/N |

| | | | | |
|--|--|-----------------------|--|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN (K.TAMURA) 2NOV00 | AMP Tyco Electronics AMP K.K. Kawasaki, Japan | |
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK | NAME フレックス バック システム ソケット コンタクト FLEX PACK SYSTEM SOCKET CONTACT | |
| 0 PLC ± - | 1 PLC ± - | APVD | SIZE A3 | CAGE CODE 00779 |
| 2 PLC ± - | 3 PLC ± - | PRODUCT SPEC | DRAWING NO C-1437249-7 | RESTRICTED TO |
| 4 PLC ± - | ANGLES ± - | APPLICATION SPEC | SCALE 1:1 | SHEET 1 OF 1 |
| MATERIAL 2 | FINISH | WEIGHT | CUSTOMER DRAWING | REV A |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)