


RECOMMENDED MOUNTING PATTERN

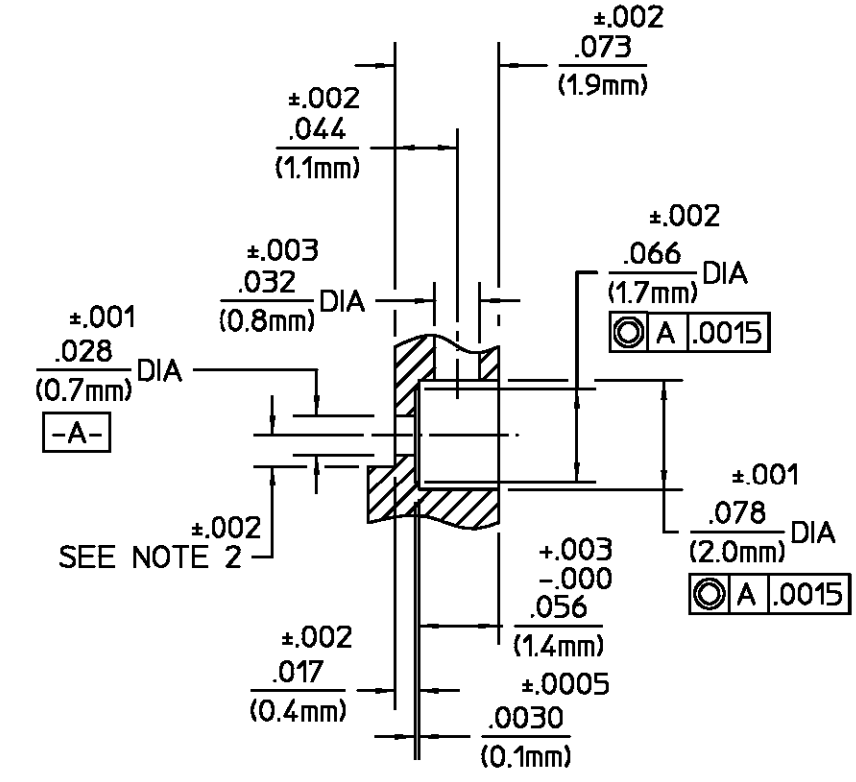

RECOMMENDED MOUNTING HOLE
SCALE: 8:1

.XXX = in
XX.X = mm (REF)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 ₀	RELEASED WAS UNRELEASED	4-27-92	<i>CAF</i>
B	PER EC 0U20-0116-01-05	19NOV01	<i>C. Hoang</i>

- NOTES:
1. CAPTURED CENTER CONTACT
 2. DIMENSION IS .006 (PIN RADIUS) + SUBSTRATE THICKNESS + SOLDER THICKNESS
 3. FOR RECOMMENDED MOUNTING HOLE FOR USE WITH SLIDING CONTACT SEE AP# 48-007

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
BUSHING	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
SUPPORT BEAD	NORYL PPO EN265 COLOR: BLACK	N/A
CENTER CONTACT	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204

COMPONENT	MATERIAL	FINISH
-----------	----------	--------

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± °	DRAWN BY <i>MC</i> DATE 4-24-92	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
	CHECKED BY <i>BB</i> 4/24/92	
	APPD BY <i>CAF</i> 4-27-92	

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASSY PROCEDURE	TITLE OS-2.9 2 HOLE FLANGE MOUNT JACK RECEPTACLE - FIELD REPLACEABLE			
	408-04628 (48-007)	NO. AP			
	NO. AP	SIZE B	CODE IDENT NO. 26805	4852-3575-02	REV 03 ₀
		SCALE 4:1			SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1060031-1
SHEET 1 OF 1 REV B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)