
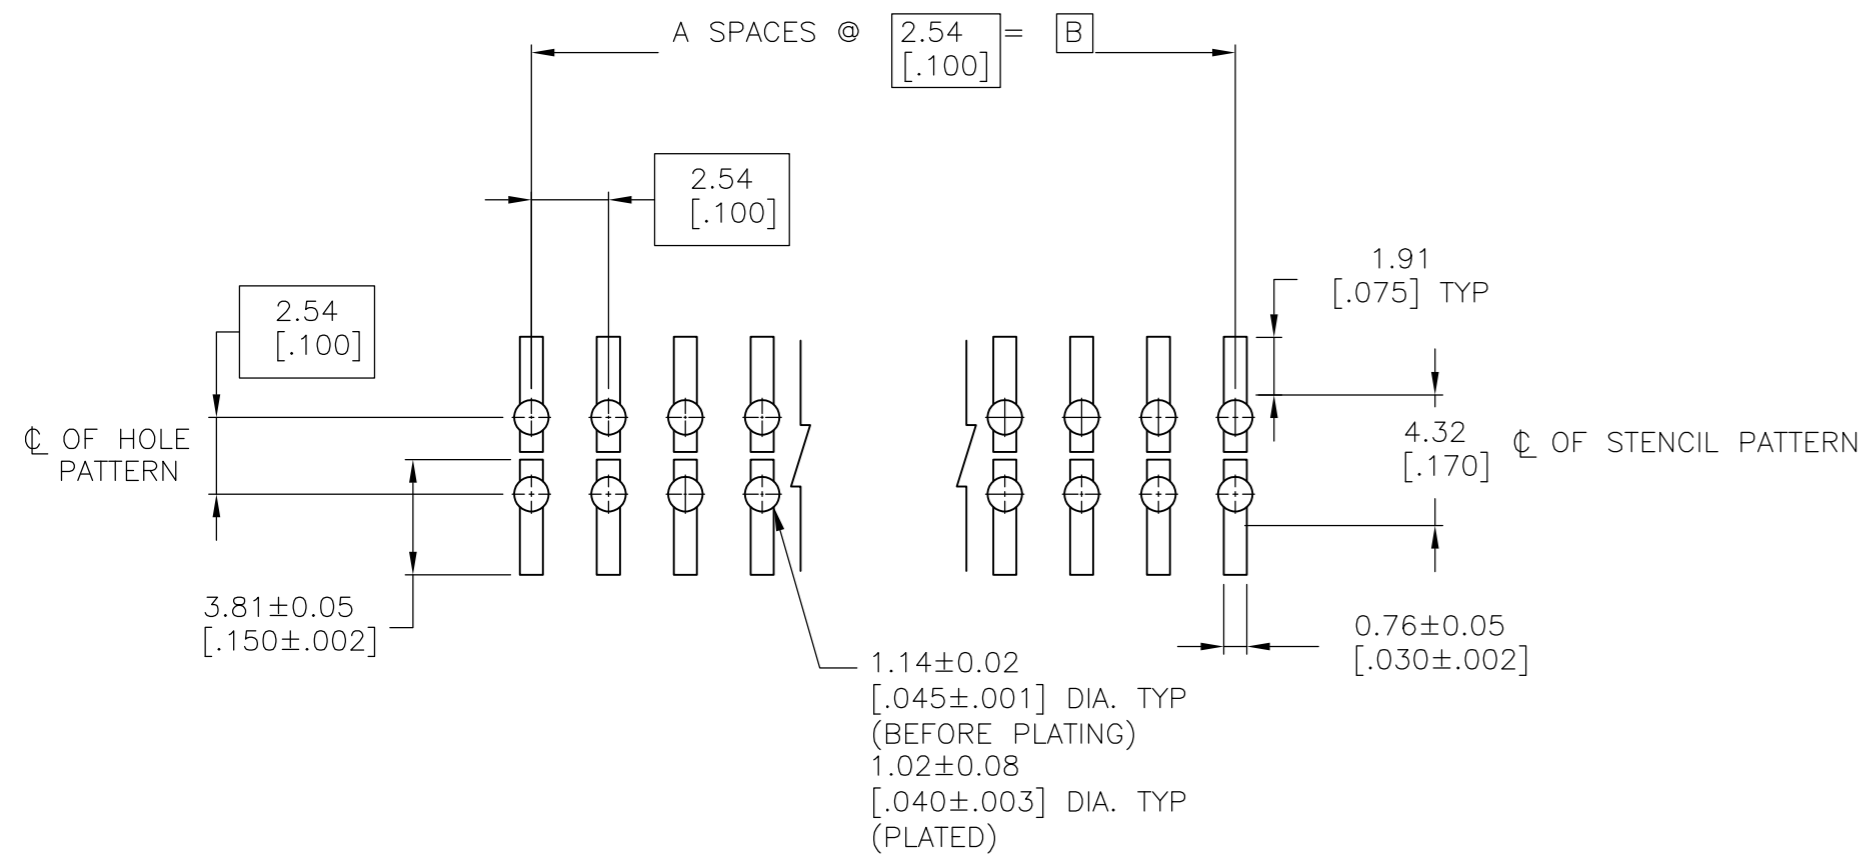


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	C	REVIS	PER ECO-14-006554	09MAY2014	NK	MM

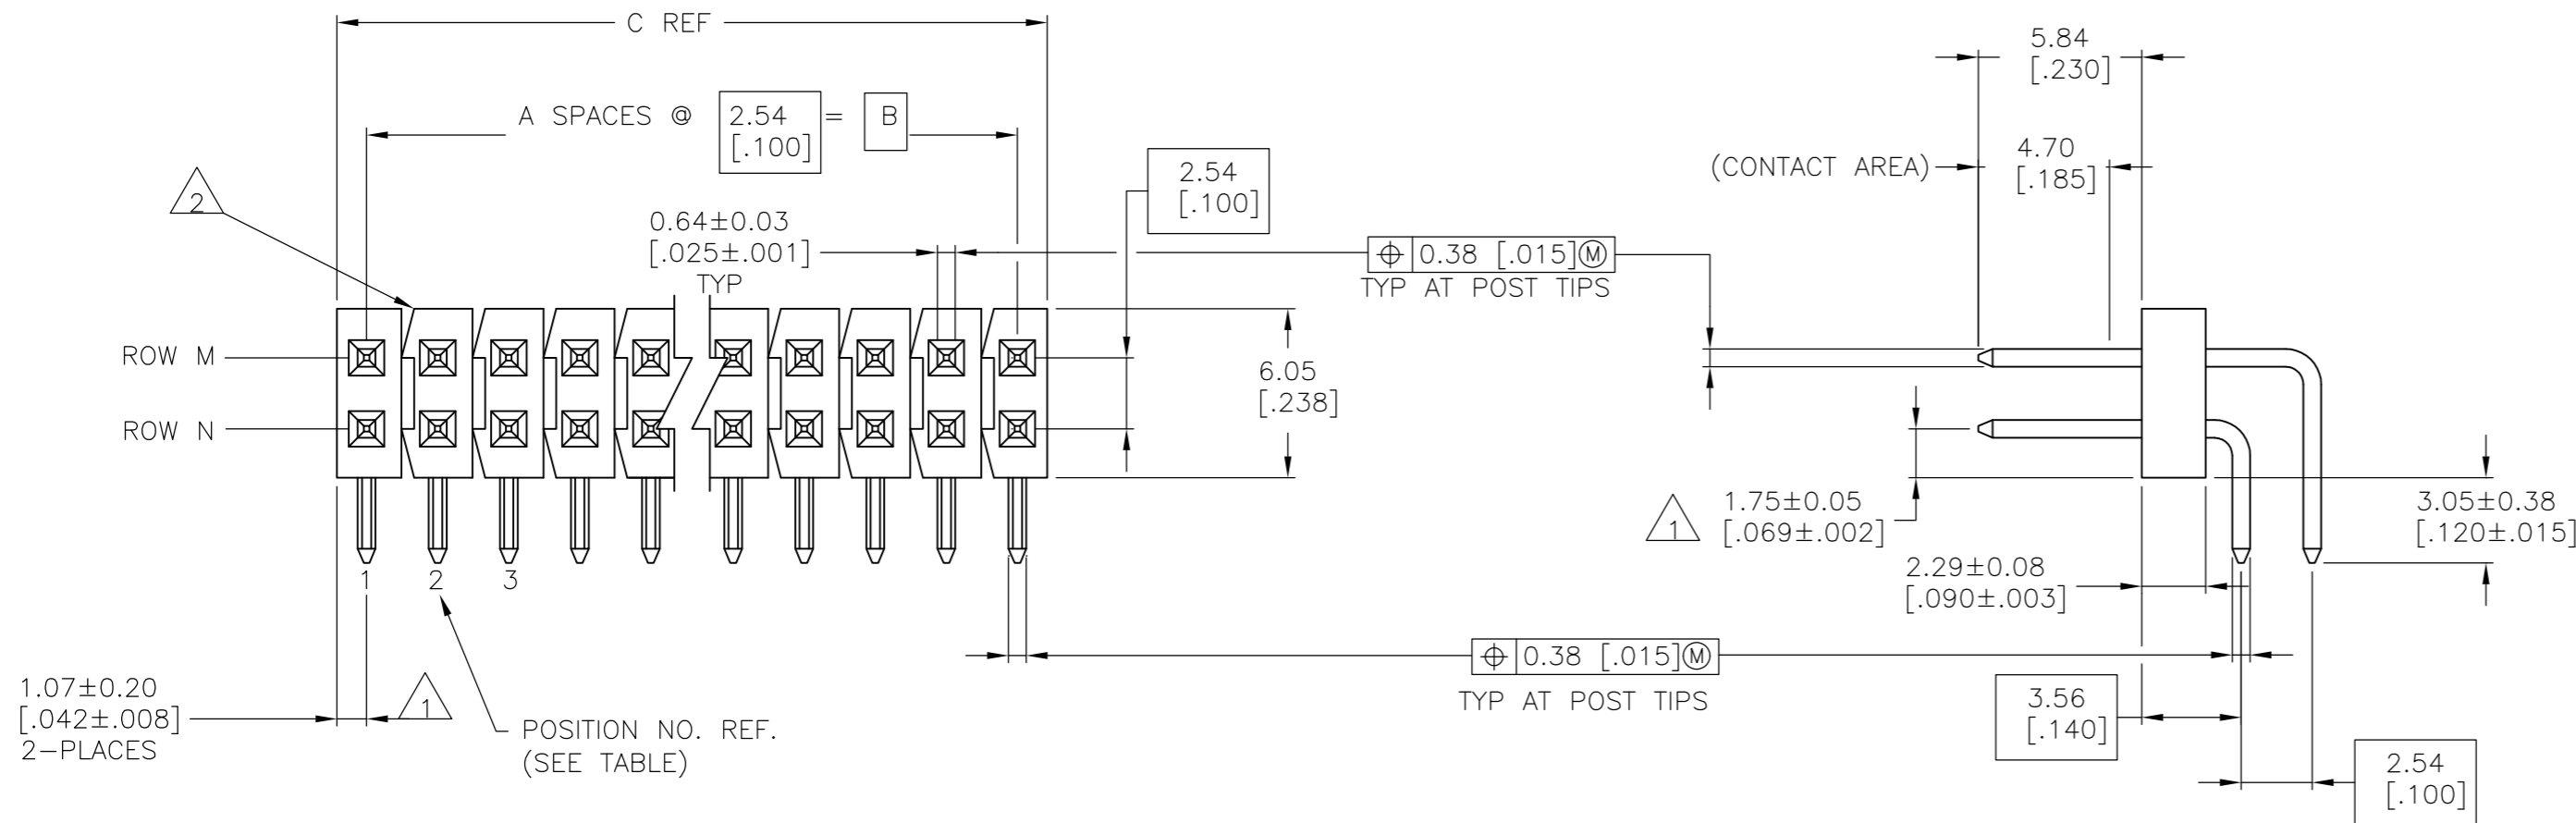

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
 FOR 1.60 [.063] THICK PC BOARD AND
 0.305 [.0120] STENCIL THICK

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAK AWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 FOR ACTIVE POSITION SIZES 4 AND ABOVE, POSTS WILL BE SELECTIVELY SWAGED TO PROVIDE CONNECTOR RETENTION TO THE PC BOARD UNTIL SOLDERED. FOR POSITION SIZE 2, POSTS WILL BE KINKED.(SEE TABLE FOR RETENTION FEATURE LOCATION)
- 4 HOUSING: GLASS FILLED THERMOPLASTIC, COLOR, BLACK. (WILL WITHSTAND VAPOR PHASE REFLOW.)
- 5 FINISH: 0.000076[.000003] MIN GOLD OVER 0.00068[.000027] Pd/Ni ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.

5	1,2,3,9,40	1,2,3,9,40	101.19 [3.984]	99.06 [3.900]	39	80	8-1977963-0
5	1	1	2.13 [.084]	-	0	2	1977963-2
PLATING	ROW M	ROW N	C	B	A	NO. OF POSITIONS	PART NUMBER
	HOLD-DOWN POST CONFIG. LOCATIONS.						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	KIRAN HOLAL	21SEP2013
CHK	MIKE MILLER	21SEP2013
APVD	MIKE MILLER	21SEP2013
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, HIGH TEMP., RIGHT ANGLE, DOUBLE ROW, .100 X.100 CL, W/.025 SQ. POSTS WITH HOLD-DOWN CONFIGURATION.

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 1977963 RESTRICTED TO: -

SCALE: 4:1 SHEET: 1 OF 1 REV: C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)