


COIL: @ 25°C
 RESISTANCE 300 OHMS ± 10%
 NOMINAL VOLTAGE 28.0 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 7.0 VDC MAX. 15 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
 OPERATE BOUNCE 2 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

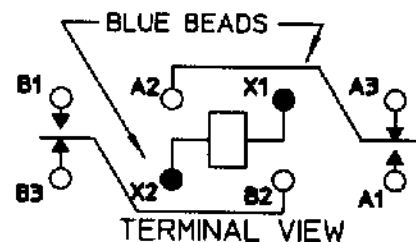

CONTACT RATING: 10 AMPS 28 VDC
 115 VAC/400 HZ, 1 PHASE.
 100,000 OPERATIONS

DR. PBB 6/2/00

CK. TLG 6-2-00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. MS27247-1 REV. ---

07 RELAY

B07D111BC4-0006

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)