


Type C Series

Key Features

- Vitreous Enamel Coated
- Quality Approved
- Up to 14 Watts Power
- All Welded Construction
- Overload 10 x 5 Seconds
- Ammo Packed or Reeled (3-7 Watt)

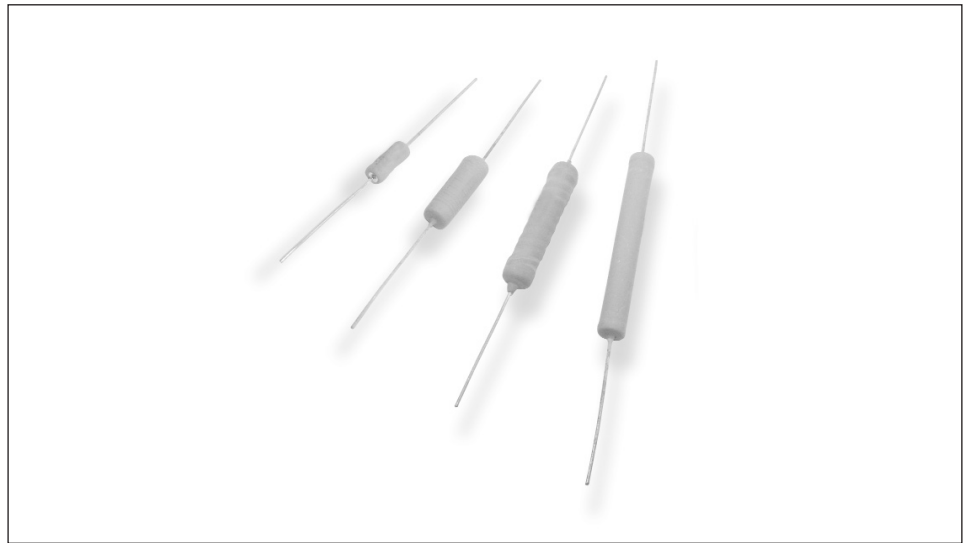

TE Connectivity has offered the 'C' Series of Vitreous Enamelled Wirewound Resistors for more than 25 years and as a result of continuous development and investment in the latest production equipment now supplies a product with a proven record of reliability and quality. These economically priced resistors are capable of dissipating high power from a relatively small size in harsh environmental conditions. The resistors are manufactured from quality materials for optimum reliability and stability.


Characteristics - Electrical

| | C3A | C7 | C10 | C14 |
|---|---|-----------------|-----|--------------------|
| Wattage at 40°C: | 4 | 7 | 10 | 14 |
| Ohmic Value (Min): | R10 | R10 | R10 | R10 |
| (Max): | 10K | 27K | 47K | 100K |
| Limiting Element Voltage (DC/AC RMS): | 200 | 350 | 500 | 650 |
| Resistance Tolerance: | 10%, 5%, 2% (1% by request on a limited value range) | | | |
| Temperature Coefficient of Resistance (Ohmic Value): | Above 1R0 90ppm/°C | | | |
| Overload Resistance Change (Up to 10x rated wattage for 5 secs): | ΔR Less than 1% | | | |
| Load Life stability at Rated Wattage (Resistance Change): | 1000 Hours | ΔR Less than 3% | | |
| | 8000 Hours | ΔR Less than 5% | | |
| Shelf Life Stability (Resistance Change): | 2 Years | | | ΔR Less than 0.25% |
| Power Derating: | Derate from 40°C linearly to zero at 350°C | | | |

Characteristics - Environmental


| | |
|--|---------------------------|
| Climatic Category 55/200/56: | ΔR Typically less than 1% |
| Solder Heat 260° for 5 Seconds: | ΔR Less than 0.1% |

Surface Temperature v Power Dissipation

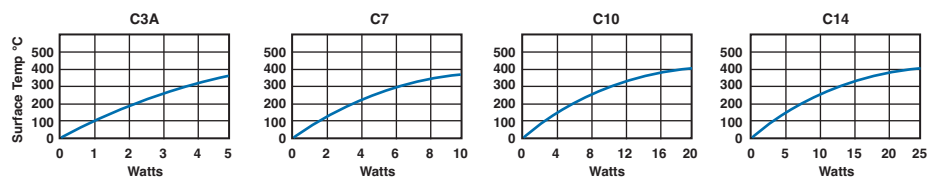

Type C Series

Dimensions

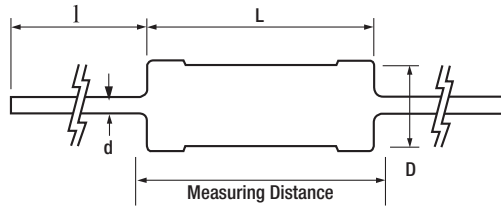

| Type | L | D | d | I | Measuring Distance |
|------|------|-----|-----|------|--------------------|
| C3A | 13.0 | 5.7 | 0.8 | 35.0 | 30.7 |
| C7 | 22.0 | 8.5 | 0.8 | 35.0 | 37.7 |
| C10 | 38.1 | 8.5 | 0.8 | 35.0 | 52.8 |
| C14 | 53.3 | 8.5 | 0.8 | 35.0 | 69.5 |

Packaging Bandolier

C10/C14 - packed in cardboard sleeves in multiples of 25.

C3A - Ammo 500 Reeled 1000

C7 - Ammo 250 Reeled 500

How to Order

| C3A | 680R | J | T |
|---|---|--|---|
| Common Part | Resistance Value | Tolerance | Pack Style |
| C3A - 3 Watt C7 - 7 Watt C10 - 10 Watt C14 - 14 Watt | 0.1 ohm (100 milliohms) R10 1.0 ohm (1000 milliohms) 1R0 1K ohm (1000 ohms) 1K0 | G - $\pm 2\%$ J - $\pm 5\%$ K - $\pm 10\%$ | R - Bandoliered Reel T - Bandoliered Ammo Pack L - Loose (C10 & C14 only) |

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)