

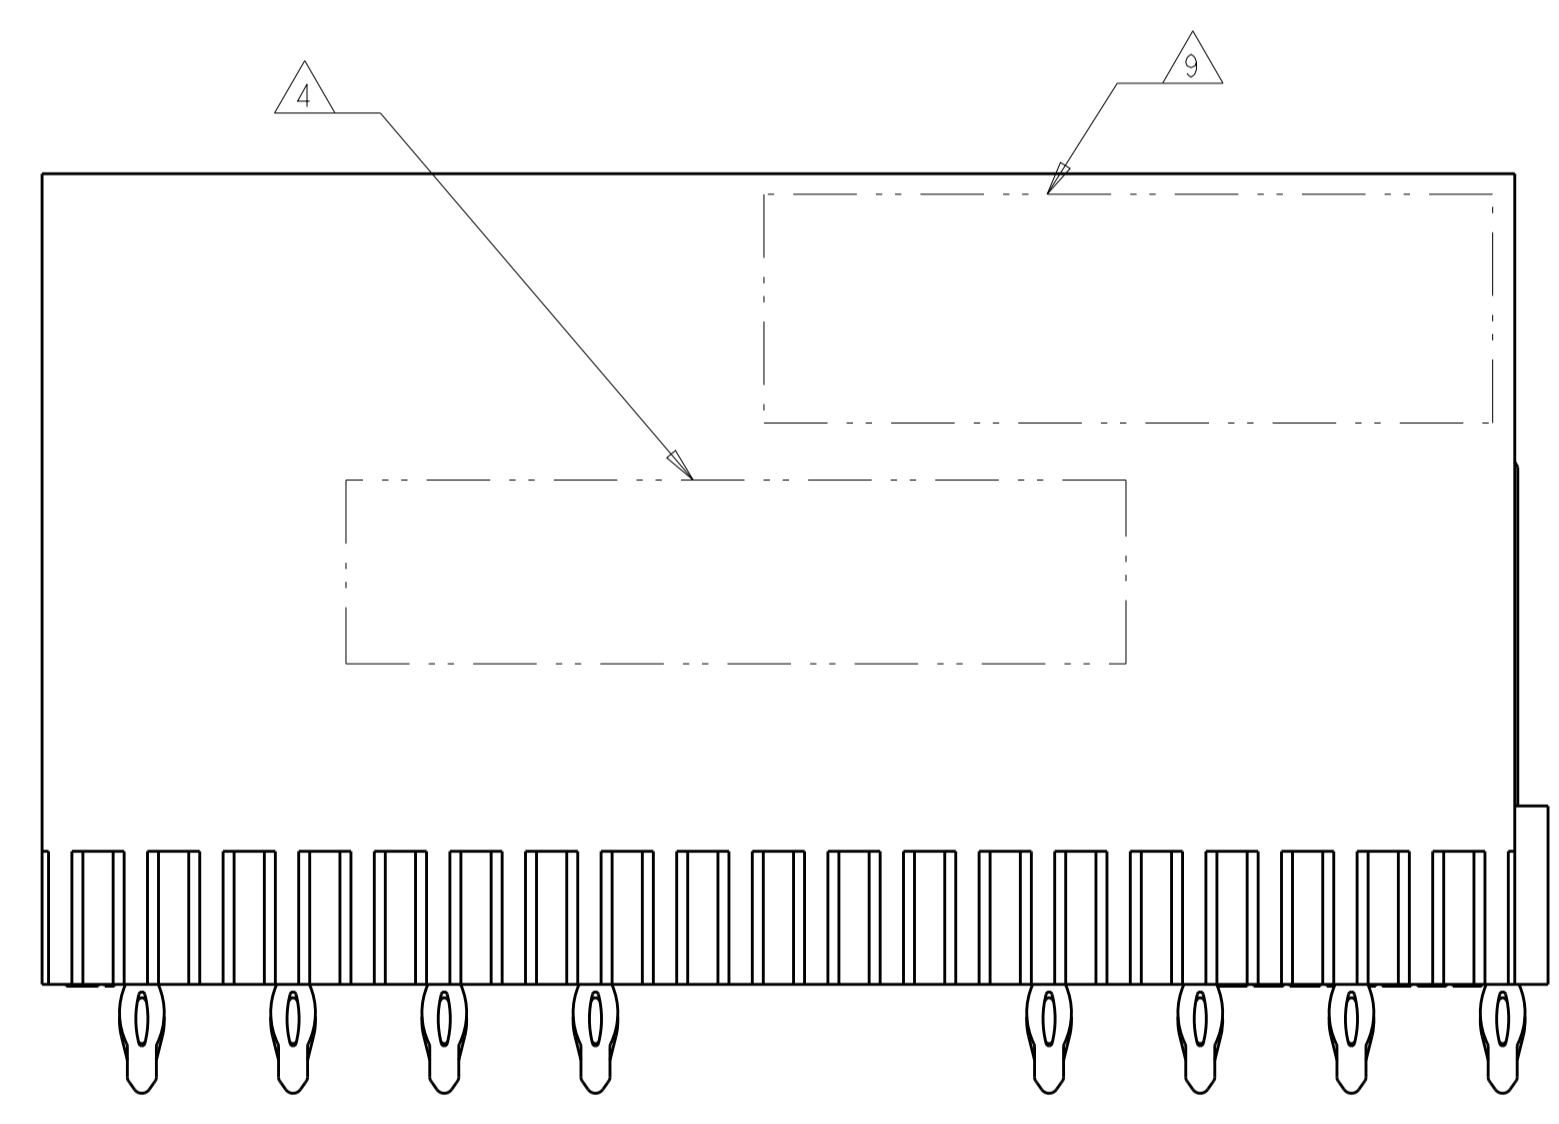
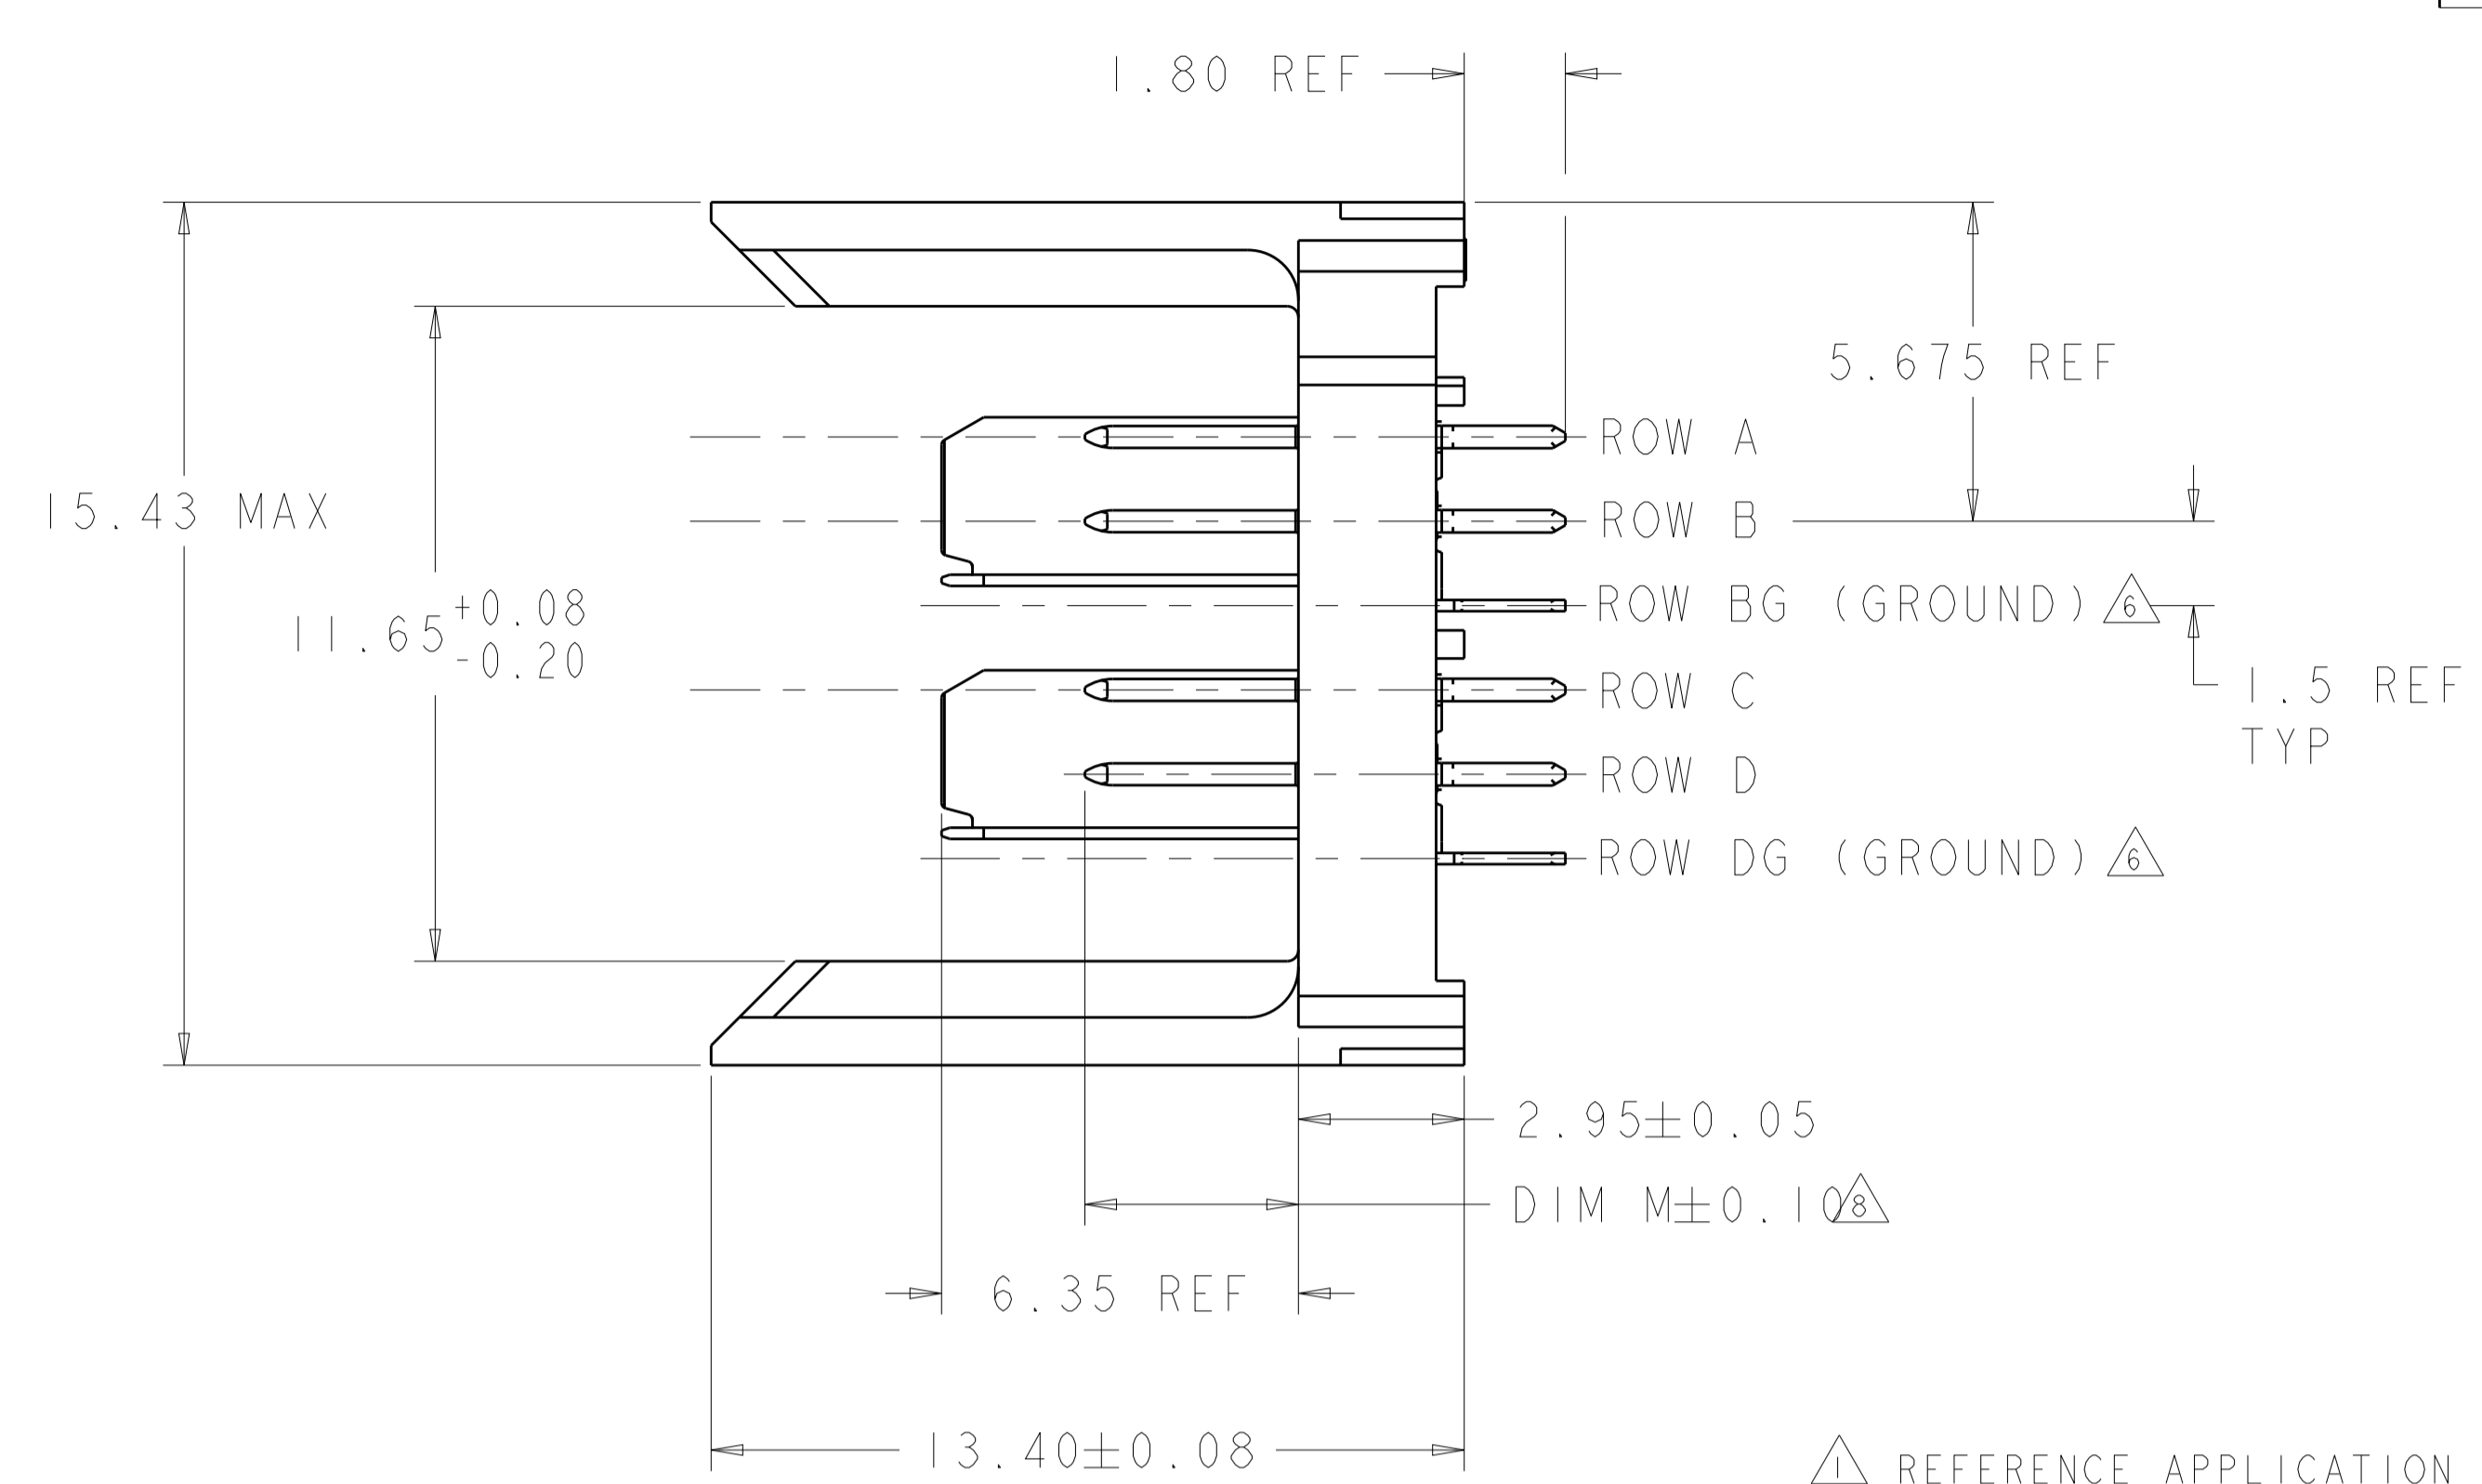


LOC	DIST	REVISIONS			
		REV	DATE	BY	CHK
AD	00	E	17JAN12	KH	DY
		F	01OCT2019	AP	DS

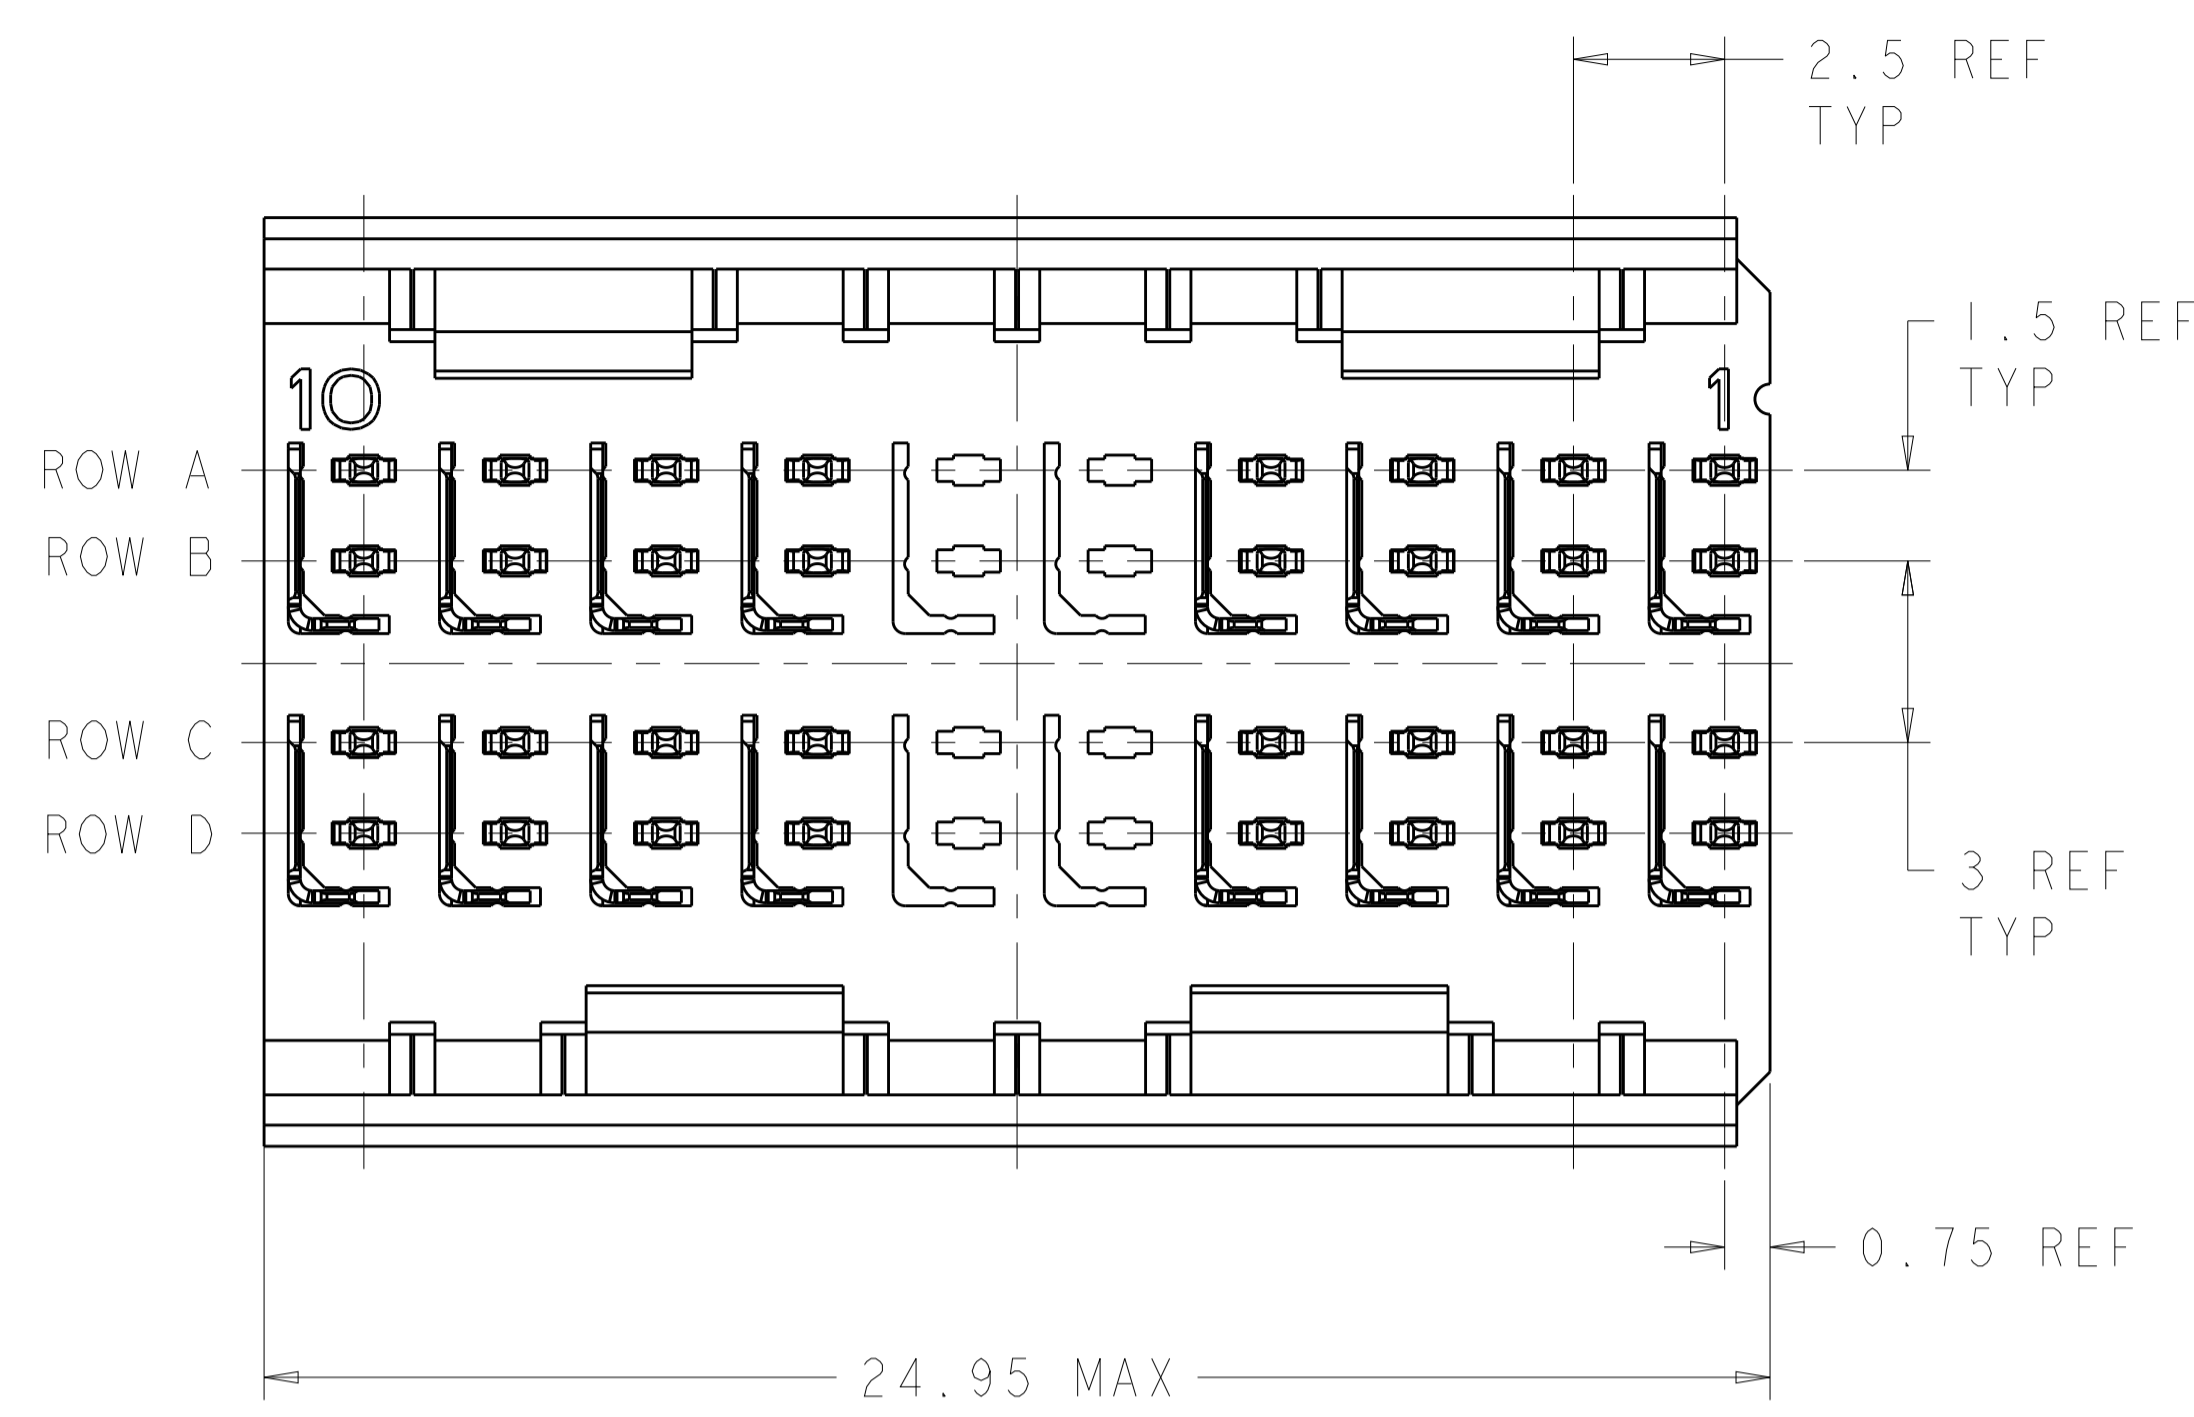

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.
- △ TE OR TE CONNECTIVITY LOGO IS LOCATED.

⊕ Ø0.05Ⓢ X Y
 ALL PLATED THRU HOLES

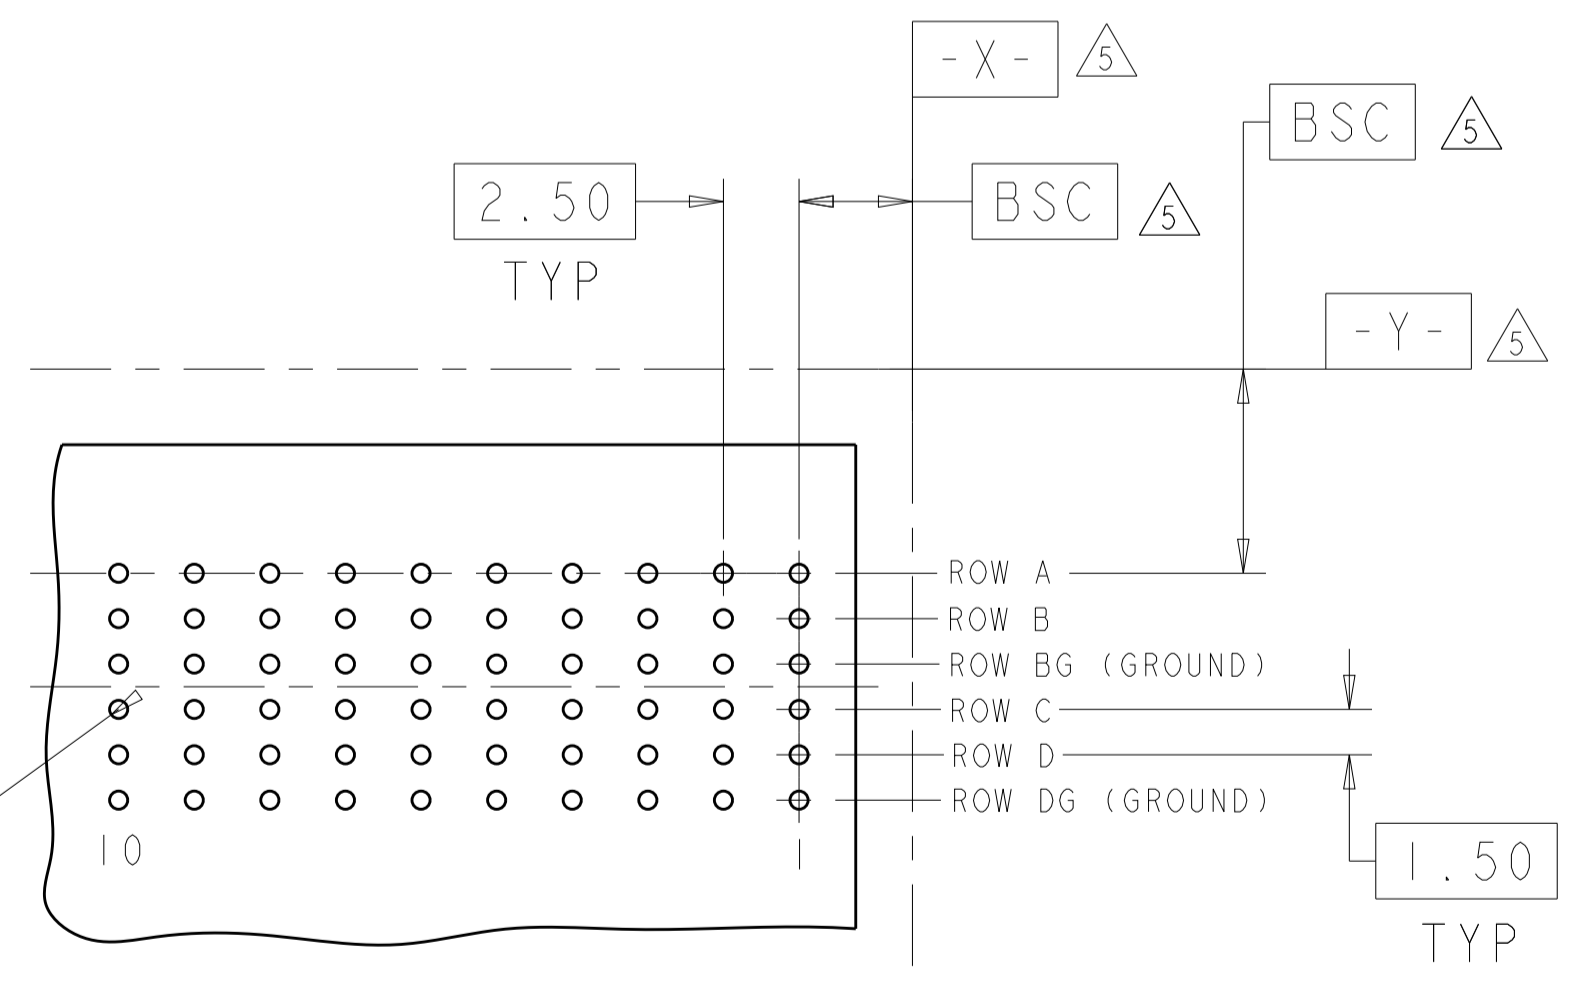

RECOMMENDED PC BOARD LAYOUT, BACKPLANE, COMPONENT SIDE SHOWN
 SCALE 4:1

CONTACT LAYOUT
 A = 3.80mm (DIM M)
 B = 5.30mm (DIM M)
 G = GROUND

		COLUMNS									
		10	9	8	7	6	5	4	3	2	1
ROWS	A	B	B	B	B			B	B	B	B
	B	B	B	B	B			B	B	B	B
	BG	G	G	G	G			G	G	G	G
	C	B	B	B	B			B	B	B	B
	D	B	B	B	B			B	B	B	B
DG	G	G	G	G			G	G	G	G	

1645532-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: D. HUMBERT 30SEP2009	TE Connectivity
DIMENSIONS: mm		CHK: J. EARY 30SEP2009	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. EARY 30SEP2009	NAME: HEADER ASSEMBLY, 2 PAIR, SELECTIVELY LOADED, 1.8mm TAIL, 25mm, HMzd
0 PLC ±		PRODUCT SPEC	
1 PLC ±		APPLICATION SPEC	SIZE: CAGE CODE DRAWING NO. RESTRICTED TO A100779 ©=1645532
2 PLC ±		WEIGHT	
3 PLC ±		CUSTOMER DRAWING	SCALE: 8:1 SHEET 1 OF 1 REV F
4 PLC ±			
ANGLES ±			
FINISH			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)