


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE	APPD	
DF	SO												DESCRIPTION			
													REV PER 063D-0222-03	CT	1-04	DE

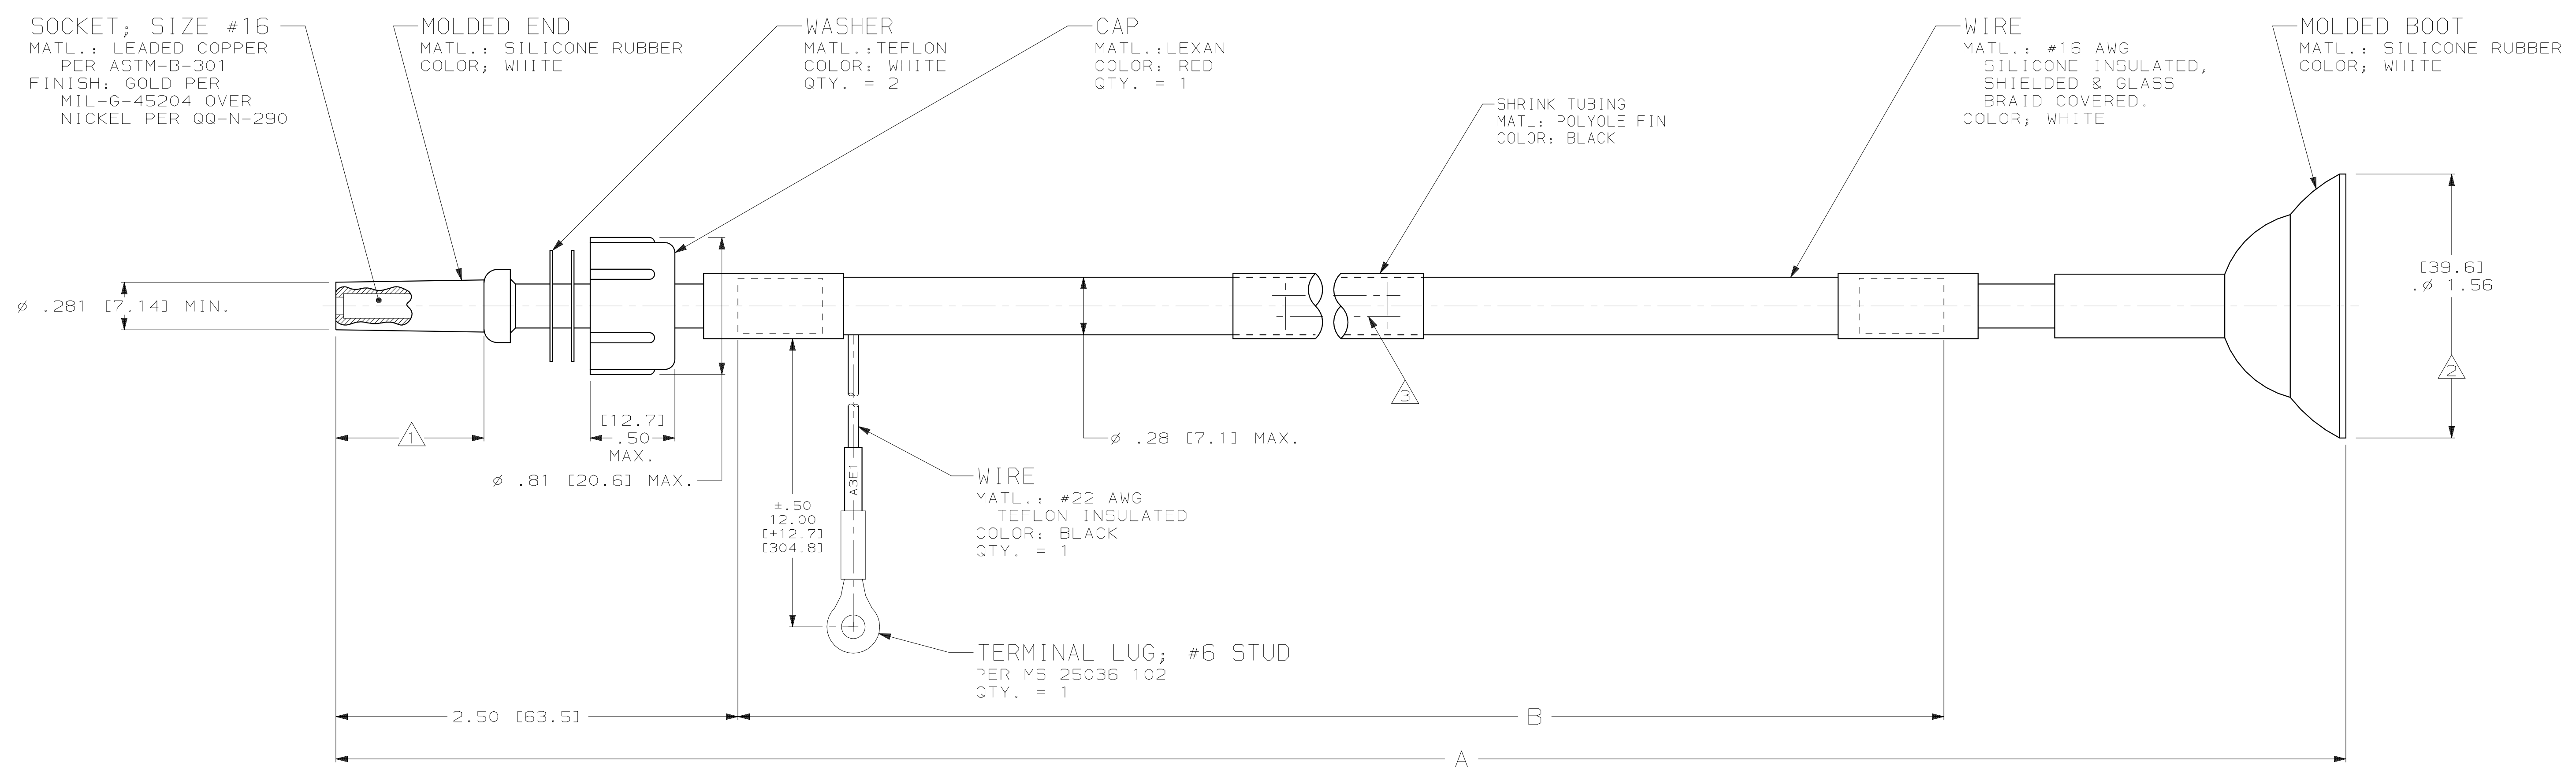

REV	DESCRIPTION	DATE	BY	CHK	APPD	NAME
13973-841416-3 REV --		42.00 ±.25 [1066.8 ± 6.4]	47.00 ±.50 [1193.8 ± 12.7]			447671-2
OBsolete		26.00 ±.25 [660.4 ± 6.4]	31.00 ±.50 [787.4 ± 12.7]			447671-1
	CUST. PART NO.	B	A			PART NO.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .01 [0.25] 3 PLC DEC ± .005 [0.13] ANGLES ± -	DR W. LEUFERT 12-4-90 CHK D. EABY 2-27-91 APPD D. EABY 2-27-91 APPD D. EABY 2-27-91	AMP INCORPORATED Harrisburg, Pa. 17105
SEE CALLOUTS	PRODUCT SPEC -	
FINISH SEE CALLOUTS	APPLICATION SPEC -	NAME LEAD ASSEMBLY, LGH-1 CRT BASE W/J1-21 CONTACT
WEIGHT -	SCALE 2:1	SIZE D 00779 CAGE CODE 00779 DRAWING NO 447671 SHEET 1 of 1

- 1 TO MATE WITH AMP LGH-1 RCPT. WITH .88 [22.4] BARREL DEPTH.
- 2 TO MATE WITH J1-21 TYPE TERMINAL.
- 3 MARKED PER MIL-STD-130 INCLUDING CUSTOMER PART NO. (SEE TABLE).
- 4. OPERATING CONDITIONS: 20KVDC, SEA LEVEL TO +70,000 FEET, [21.3 KM] -55°C TO +125°C.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)