

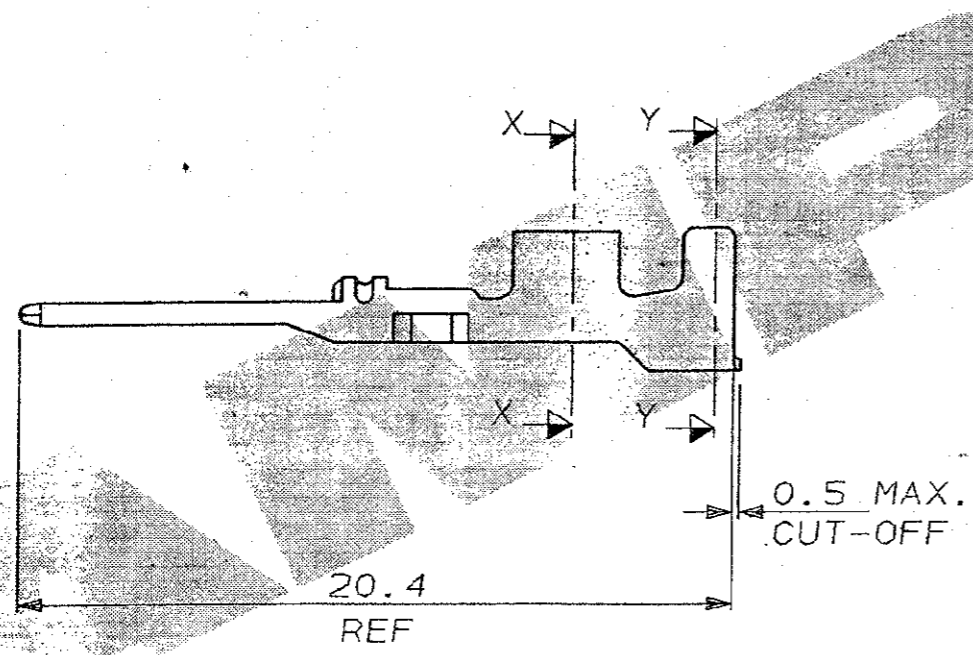



C.A.D. FILE CODE
S. C345148.A

DO NOT SCALE

DIMENSIONS IN MM.



SECTION X-X



SECTION Y-Y

WIRE RANGE: 0.75 TO 2.00 mm²
 INSULATION RANGE: 1.65 TO 2.70 mm DIA.
 THIN WALLED CABLE TO BE USED


SEALED APPLICATIONS ONLY.

PRODUCT SPEC. 108-3069

APPLICATION SPEC. 114-3040

H/TOOL PN.525317-2 (FOR 0.75-1.0mm² WIRES).

H/TOOL PN.525317-4 (FOR 1.5-2.0mm² WIRES).

PRE-TINNED BRASS		MADE FROM STRIP PN.345807-1		345148-1	
FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG FOR REFERENCE ONLY		© COPYRIGHT 1991 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION 05 JUL 1991	
-	-	TOLERANCES UNLESS OTHERWISE STATED :		DR. R.J.S. 5.7.91	
-	-	DEC ± 0.5		CH. M.McG. APP. J.P.	
-	-	ANGLES ± 1°		 TERMINAL HOUSE STANMORE MIDDX.	
-	-	NAME LOOSE PIECE .070" TAB ECONOSEAL 3 L.C. (SEALED)			
A	EB00-0041-01	14.02.01	SCALE	LOC	SIZE
1	PRELIM. ISSUE	5.7.91	5/1	E	A3
REV	APPROVED	ECN	DATE	DWG.No.	REV
				C345148	A 1/1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)