


TOLERANCE = ±.010

COIL: @ 25°C
 RESISTANCE 300 OHMS ± 10%
 NOMINAL VOLTAGE 28.0 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 7.0 VDC MAX, 1.6 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -70 °C TO +125 °C


NOTES: OPERATE & RELEASE 10 MS MAX.
OPERATE BOUNCE 2 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

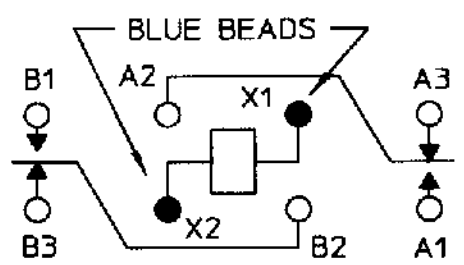

CONTACT RATING: 10 AMPS 28 VDC,
10 AMPS 115 VAC 400 HZ RESISTIVE
100,000 OPERATIONS

DR. R.B. 9/14/98 CK.9/14/98



CUST. GPL
 CUST. NO. MS27245-1

TYPE '07' RELAY

B07D112BC4-0007

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)