


COIL: @ 25°C
 RESISTANCE 330 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 2.0 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 13 MS MAX.
RELEASE TIME 5 MS MAX.
CONTACT BOUNCE 5 MS MAX. (NC)
2 MS MAX. (NO)

CUSTOMER DATA SHEET

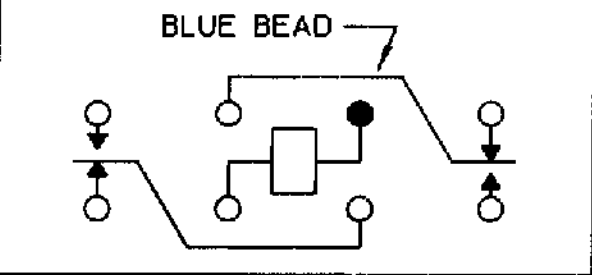

CONTACT RATING: 10 AMPS 30 VDC RES.
10 AMPS 115 VAC 400 Hz. 6A 30 VDC
INDUCTIVE 100,000 OPERATIONS

DR. R.E. 1/12/95 CK. 1/12/95

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
 CUST. NO. 2T-1B-126

TYPE "07" RELAY

B07B932BZ1-8005

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)