


CUSTOMER DRAWING

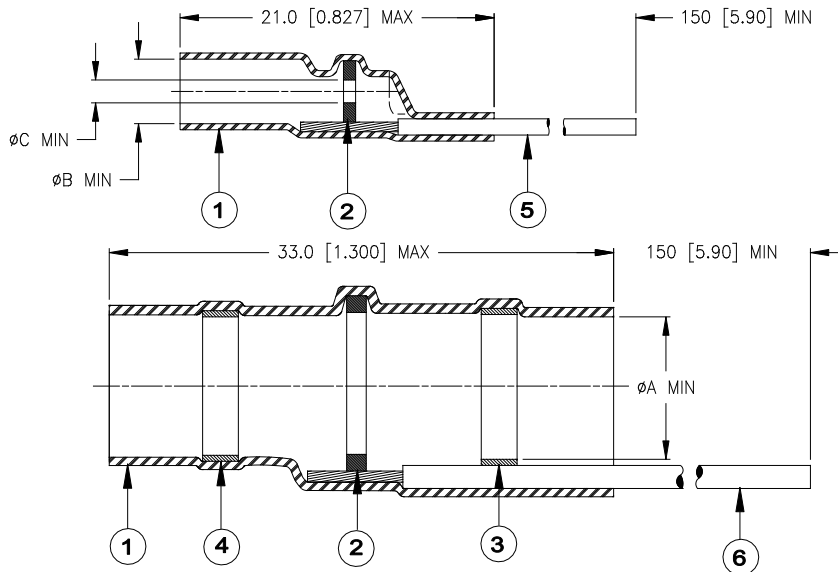

Product Name	Product Dimensions			Cable Dimensions	
	øA min	øB min	øC min	Typical Cable	øE min
B-155-4058-35-22-5/9	6.0 [0.235]	3.1 [0.120]	1.0 [0.040]	RG 58	3.3 [0.130]
B-155-4059-35-22-5/9	7.0 [0.275]	3.9 [0.155]		RG59	3.7 [0.145]
B-155-4174-35-22-5/9	4.5 [0.175]	1.7 [0.065]		RG174	2.3 [0.090]


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn42Bi58 per ANSI / J-STD-006.
 FLUX: TYPE ROM1 per ANSI / J-STD-004.
- MELTABLE RING: Thermally stabilized thermoplastic. Color: clear.
- MELTABLE RING: Thermally stabilized thermoplastic. Color: blue.
- CONDUCTOR LEAD: Cross-linked polyolefin insulated, stranded, tin-plated copper. Color: white.
- GROUND LEAD: Cross-linked polyolefin insulated, stranded, tin plated-copper. Color: green.

APPLICATION

- These parts are designed to provide an environment protected coaxial termination on cables, rated for at least +65°C minimum, meeting the dimensional criteria listed, having bare copper, tin or silver-plated shields and conductors.
- Temperature range: -55°C to +125°C.
- Install using TE Connectivity approved convection heating tools in accordance with TE Connectivity / Raychem installation procedure RPIP-824-00.

For best results, prepare the cable as shown:

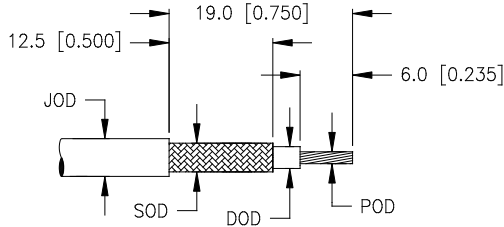

Part selection:

- JOD: Cable jacket must be less than øA min.
- DOD: Cable dielectric must be less than øB min.
- SOD: Cable shield must be greater than øE min.
- POD: Conductor must be between øC min and 0.3 [0.012]

		Raychem DEVICES	TITLE: COAXIAL TERMINATION KIT RoHS COMPLIANT*		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.:		
			B-155-4XXX-35-22-5/9		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: 2	DATE: 21-Apr-2020	
PREPARED BY: M. FORONDA	CAGE CODE: 06090	ECO NUMBER: ECO-20-005249	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)